

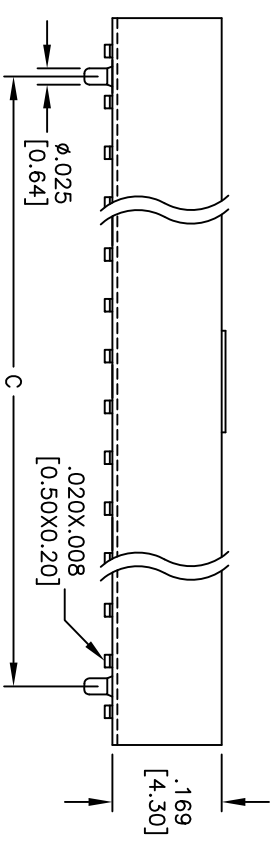
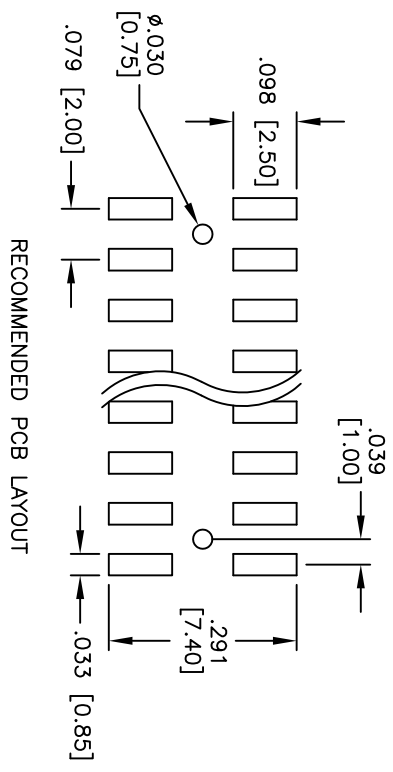


| Rev | AWO # | Description | Date | Appr |
|-----|-------|-------------|----------|------|
| - | | RELEASED | 11/20/09 | |

APPROVED: _____
 DATE: _____ TITLE: _____

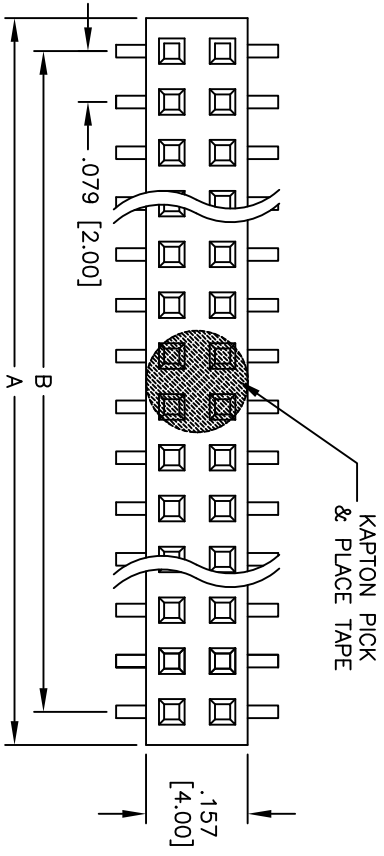

PACKAGED ON TAPE & REEL

Positions: 03 thru 40 per row
 A = .079 [2.00] x No. of Positions + .024 [0.60]
 B = .079 [2.00] x No. of Spaces
 C = .079 [2.00] x No. of Positions - .157 [4.00]

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .079x.079 DUAL ROW RECEPTACLE STRIP
 .169 [4.30] HEIGHT, SMT, PEGS

SPECIFICATIONS:

- Material: Nylon6T, UL 94V-0
- Insulator color: Black
- Contacts: Phosphor Bronze
- Plating: Tin over Copper underplate on tails.
- Gold flash over Nickel underplate on contact area.
- Electrical: Current rating: 2 Amps max.
- Contact resistance: 20 mohms max. initial
- Insulation resistance: 1,000 Mohms min.
- Dielectric withstanding voltage: 500 VAC for 1 minute
- Temperature Rating: Operating temperature: -40°C to +105°C
- Environmental: Lead free, RoHS compliant
- Recommended soldering temp: 260°C for 5 seconds



| UNLESS OTHERWISE SPECIFIED | | | |
|-----------------------------------|-------|------|----------|
| ALL DIMENSIONS ARE IN INCHES [MM] | | | |
| TOLERANCES: EXCEPT AS NOTED | HOLDS | | |
| .X | ±.10 | ØX | ±.10 |
| .XX | ±.020 | ØXX | ±.015 |
| .XXX | ±.015 | ØXXX | ±.010 |
| APPROVALS | | | |
| DRAWN | DY | DATE | 11/20/09 |
| CHECKED | | | |
| APPROVED | | | |

| | | |
|-------------|-------------------------|--------------|
| SIZE | PART NO. | REV. |
| X | 2RS2-XX-SG-SMT-P-KT-T/R | - |
| REF: S0032T | SCALE: NTS | SHEET 1 OF 1 |