
# SAW Bandpass Filter 251905B

## 1. Features

- IF bandpass filter
- High attenuation
- Single-ended operation
- DIP Package
- Maximum Storage Temperature Range : -40℃ ~ 85℃
- Electrostatics Sensitive Device (ESD)

## 2. Package Dimension

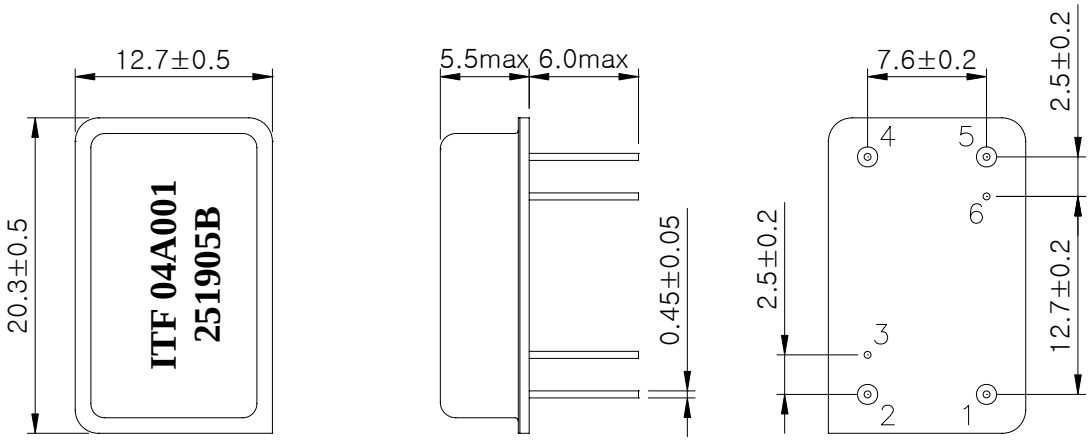


**Package : D2012**

Dimensions shown are nominal in millimeters

Base : Fe(SPCC), Au plating over Ni plated
Cap : Cu & Cr Alloy, Ni Plated
Termination : Kovar, Au Plated

| **Pin Configuration** | |
|---|---|
| 1 | Input |
| 5 | Output |
| 2, 4 | Ground |
| 3, 6 | Case ground |

## 3. Specifications

Fo = 190.0 MHz

Terminating source impedance : 50Ω and matching network

Terminating load impedance : 50Ω and matching network


| | | Minimum | Typical | Maximum |
|---|---|---|---|---|
| Center Frequency | MHz | 189.9 | 190.0 | 190.1 |
| Insertion Loss | dB | - | 26.0 | 28.0 |
| 1dB Bandwidth | MHz | - | 19.0 | - |
| 3dB Bandwidth | MHz | 19.0 | 19.4 | - |
| 50dB Bandwidth | MHz | - | 21.3 | 21.6 |
| Amplitude Ripple (Fo +/- 9.375 MHz) | dB | - | 0.7 | 1.2 |
| Group Delay Variation (Fo +/- 9.375 MHz) | nsec | - | 50 | 100 |
| Absolute Delay | usec | - | 2.85 | - |
| Ultimate Rejection | dB | 48 | 52 | - |
| Temperature Coefficient of Frequency | ppm/°C | - | -23 | - |

**Notes :**

1) All specifications are based on the matching schematic shown below
2) All specifications are measured by Agilent Network analyzer and full 2 port calibration at room temperature
3) All attenuation measurements are measured relative to insertion loss

## 4. Matching Schematic

( Actual matching values may vary due to PCB layout and parasitics )

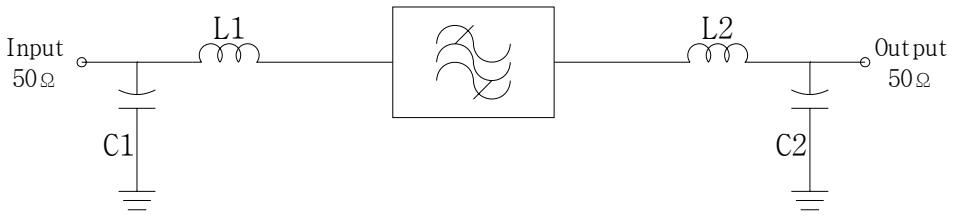


L1 = 33 nH, L2 = 27 nH

C1 = 36 pF, C2 = 43 pF

## 5. Marking Configuration

ITF[1] 04A001[2]


251905B[3]


1) Manufacturer name

2) Lot Number

3) Part Number

## 6. Typical Performance ( at +25℃ )

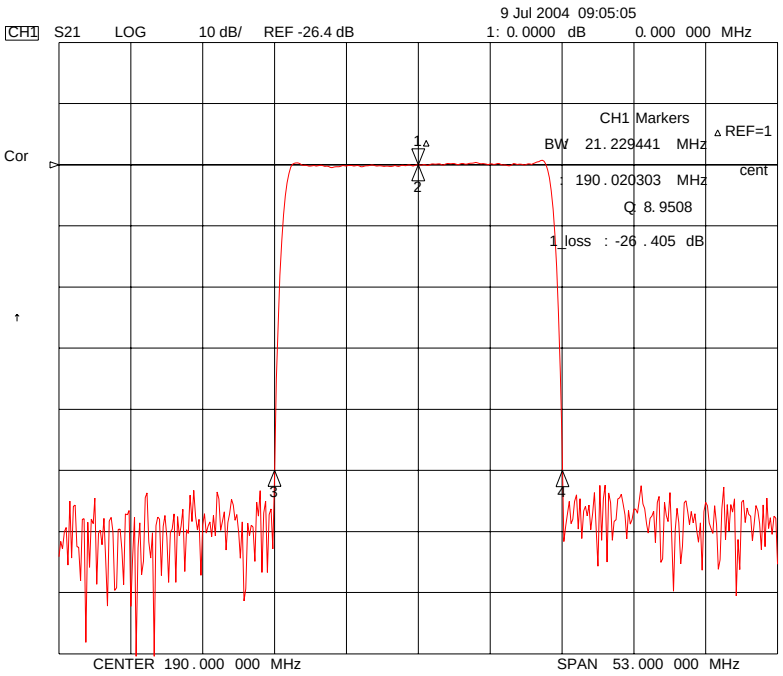
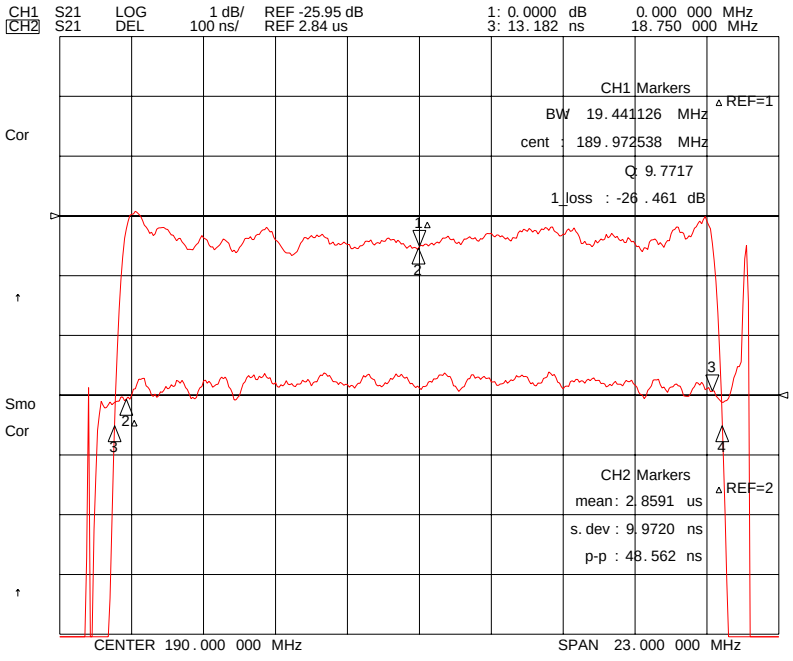
# SAW Bandpass Filter 251905B

