
Aluminum Electrolytic Capacitors		
Series:	Kemet P/N:	Customer:
EEV	EEV337M025A9MAA	

Diagram of dimensions (Unit = mm)

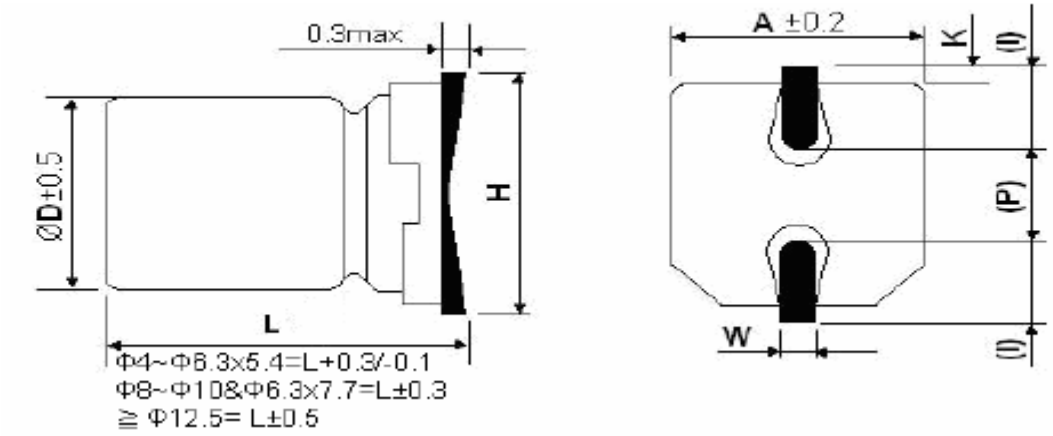

∗ ( ) : Reference size

ΦD	L	A	H	I	W	P	K	
4.0	5.4	4.3	5.5 Max	1.8	0.65±0.1	1.0±0.2	0.35	+0.15 -0.20
5.0	5.4	5.3	6.5 Max	2.2	0.65±0.1	1.5±0.2	0.35	+0.15 -0.20
6.3	5.4	6.6	7.8 Max	2.6	0.65±0.1	1.8±0.2	0.35	+0.15 -0.20
6.3	7.7	6.6	7.8 Max	2.6	0.65±0.1	1.8±0.2	0.35	+0.15 -0.20
8.0	6.2	8.3	9.5 Max	3.4	0.65±0.1	2.2±0.2	0.35	+0.15 -0.20
8.0	10.2	8.3	10.0 Max	3.4	0.90±0.2	3.1±0.2	0.70±0.20	
10.0	10.2	10.3	12.0 Max	3.5	0.90±0.2	4.6±0.2	0.70±0.20	
12.5	13.5	13.0	15.0 Max	4.8	1.20±0.2	4.4±0.2	0.70±0.30	
12.5	16	13.0	15.0 Max	4.8	1.20±0.2	4.4±0.2	0.70±0.30	
16	16.5	17.0	19.0 Max	6.3	1.20±0.2	6.4±0.2	0.70±0.30	

Electrical and mechanical characteristics	
Rated capacitance (± 20% at 120Hz / 20°C)	330µF
Rated voltage	25Vdc
Surge voltage	32Vdc
Case size D x L	∅ 8 x 10.2 mm
Operating temperature	-55 to +105°C
Dissipation factor tgδ % (120Hz / 20°C)	14%
Ripple current (100KHz / 105°C)	600mA$_{rms}$
Leakage current (2 min / 20°C)	82.5µA
Load life test	105°C - 2000H

All product specifications, statements, information and data given herein are believed to be accurate and reliable, but are presented without guarantee, warranty, or responsibility of any kind, expressed or implied. Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute – and we specifically disclaim – any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application.

KEMET's product warranty is set forth at www.kemet.com under Terms and Conditions of Sale.