


REV	DESCRIPTION	DATE	APPROVED
01	RELEASED- E020061	RCM 3/6/02	GCK

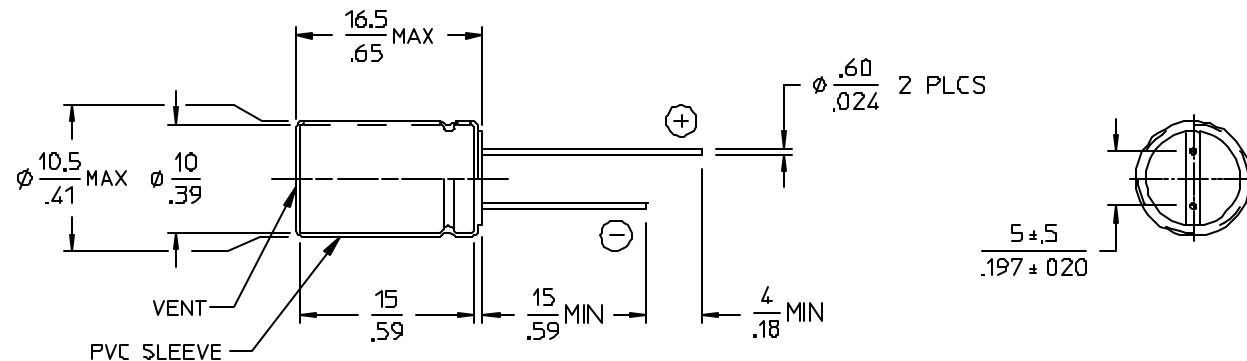

ELECTRICAL CHARACTERISTICS @ Ta= 20°C, 120Hz (UNLESS OTHERWISE SPECIFIED)

PARAMETER	SYMBOL	MIN	MAX	UNITS	TEST CONDITIONS
CAPACITANCE	C	26.4	39.6	uF	0.5Vrms
WORKING VOLTAGE	V _{DCW}	100		V	
SURGE VOLTAGE	V _{SURGE}	125		V	
LEAKAGE CURRENT	I _{DCL}		99	uA	1 MINUTE
DISSIPATION FACTOR	tan δ		0.07		
IMPEDANCE	Z		0.33 0.89	Ω	100KHZ, +20 °C 100KHZ, -10 °C
RIPPLE CURRENT	I _{RIPPLE}		500	mA	Ta= 105°C, 100KHZ
OPERATING TEMPERATURE RANGE	T _{OP}	-55	+105	°C	

- NOTES:**
1. MATERIAL: ALUMINUM ELECTROLYTIC.
 2. SOLVENT PROOF END SEAL.
 3. DIMENSIONS ARE METRIC.
INCH

MAXIMUM PERMISSIBLE RIPPLE CURRENT

FREQUENCY MULTIPLIER

FREQUENCY IN Hz					
50	120	300	1K	10K	100K
0.40	0.50	0.60	0.80	0.90	1.00

TEMPERATURE MULTIPLIER

TEMPERATURE	85°C	105°C
MULTIPLIER	1.75	1

DRAWN BY GCK		DATE 01/14/02			
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE FRACTIONS DECIMALS ANGLES +1/64 .XX- +.01 .1° XXX-.005					
THIRD ANGLE PROJECTION 		SIZE B	FSCM NO. 67131	DWG NO. 13451	REV 01
DO NOT SCALE DRAWING		SCALE 2X	SHEET 1 OF 1		

**CAPACITOR, ALEL, RADIAL,
33uF, ±20%, 100V**