T3/DS3/E3/STS-1 Transformer

EPA3582 & EPA3582-LF




- Through Hole Package
- 3000 Vrms Isolation with Reinforced Insulation
- Operating Temperature Range : -40˚C to +85˚C
- Add "-LF" after part number for Lead Free


Electrical Parameters @ 25°C

Primary Inductance (µH Min.)	**Leakage Inductance** (µH Max.)	**Interwinding Capacitance** (pF Max.)	**Turns Ratio** (± 5%)	**Primary DCR** (Ω Max.)
250	.15	5	1:1CT	.35

Package

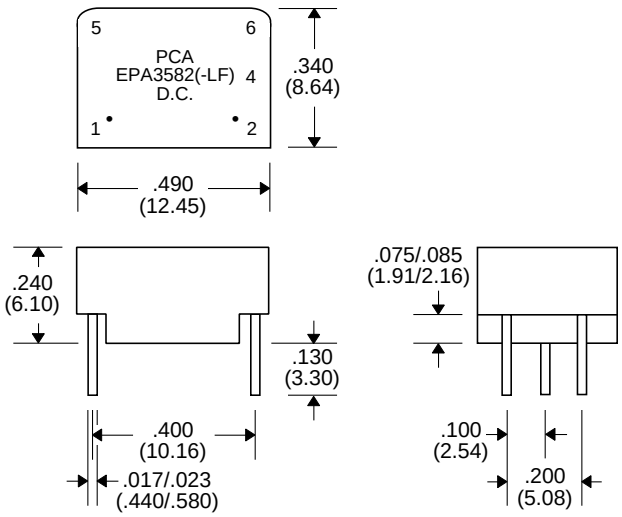

Schematic



Pin 3 Not Connected

Notes :	**EPBA3582**	**EPA3582-LF**
1. Lead Finish	SnPb	Hot Tin Dip (Sn)
2. Peak Solder Rating (for wave solder process Only)	225°C	260°C
4. Weight	TBD grams	TBD grams
5. Packaging Information (Tube)	TBD pcs / tube	TBD pcs / tube

Unless Otherwise Specified Dimensions are in Inches /mm ± .010 /.25

PCA ELECTRONICS, INC.
16799 SCHOENBORN ST.
NORTH HILLS, CA 91343

Product performance is limited to specified parameters. Data is subject to change without prior notice.

TEL: (818) 892-0761
FAX: (818) 894-5791
http://www.pca.com