

Data sheet | Item number: 852-103/040-000


Industrial-Switch; 8-port 100Base-TX; 2 Slots 100Base-FX; Extended temperature range; EXT; black

www.wago.com/852-103/040-000



i Picture differs from the item.

Color:

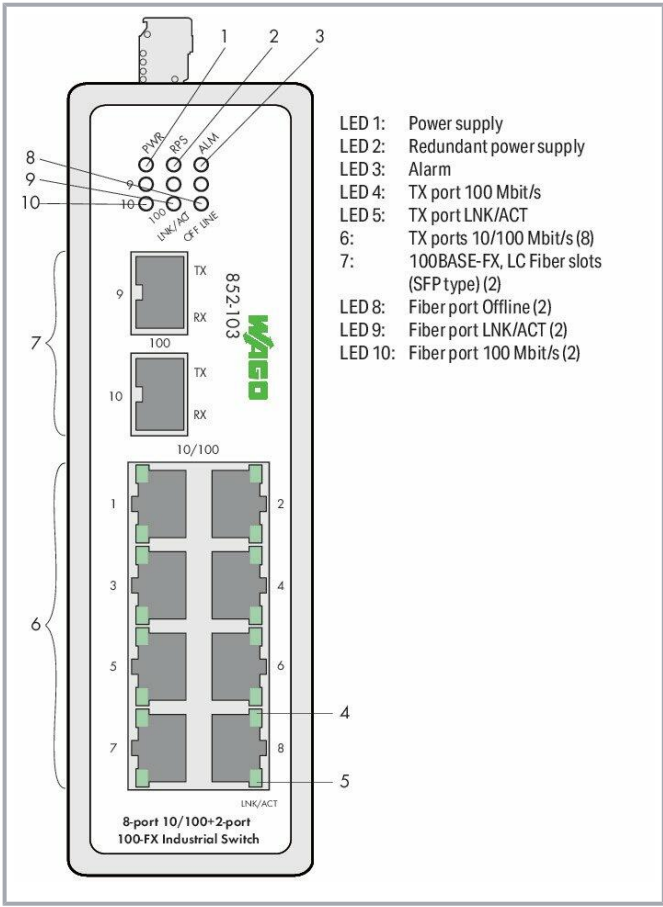

Item description

The 852-103/040-000 Industrial Switch is an 8-port 10/100Base-TX and 2-port SFP 100Base-FX (optional SFP modules) ETHERNET switch.

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Packaged in a rugged housing, this switch offers both a redundant power supply and relay-based function monitoring. These functions make it ideal for a wide range of applications.

Features:

- Redundant DC power supply
- Large supply voltage range: 9 ... 48 V
- DIP switches to set alarm functions
- Full compliance with IEEE802.3, 802.3u standards
- Non-blocking, store-and-forward switching
- Autonegotiation at all 10/100Base-TX ports
- Auto-MDI/MDIX (crossover) at all 10/100Base-TX ports

Data

Technical data

Switching mode	Store-and-forward; non-blocking
Number of 100Base-TX ports	8
Number of 100Base-FX ports	2
Communication standards	IEEE 802.3 10BASE-T IEEE 802.3u 100BASE-TX/FX IEEE 802.3x Flow Control
Redundancy function	Redundant DC power supply
Configuration options	DIP switch for signal contact
Diagnostics	Signal contact
MAC table (size)	2000 addresses
Jumbo frame size	1536. Byte
Supply voltage	9 ... 48 VDC; Cable length:< 3 m
Power consumption (max.)	6.08 W
Power consumption typ. (24 V)	5.76 W
ESD (contact/air discharge)	8 KV / 15 KV
Baud rate	Copper cable: 10/100 Mbit/s; Fiber optic:100 Mbit/s
Transmission medium (communication/fieldbus)	Copper cable: Cat. 5 or higher, 100 m maximum cable length; Fiber optic: FX Multi-Mode, LX Single-Mode
Optical fiber type	Single-Mode and Multi-Mode
Packet throughput	148,800 pkt/s
Controls	12 x DIP switch: Alarm function power supplies and ports 1 ... 10
Indicators	Device: LED (PWR, RPS) green: Power supply (primary), redundant power supply (secondary); LED (ALM) red: Alarm; LED (LNK/ACT, 100) green, LED (OFFLINE) red: Status fiber optic ports; per port: LED (100, LNK/ACT) green: Status 100 Mbps, LNK/ACT ports 1 ... 8

Subject to changes. Please also observe the further product documentation!

Connection data

Connection technology: communication/fieldbus	Copper cable: 8 x RJ-45; Fiber optic: 2 x SFP; LC fiber-optic connector
Connection technology: supply	1 x Built-in male connector: 231-436/001-000; included female connector (MCS Connectors): 231-106/026-000

Physical data

Width	50 mm / 1.969 inch
Height	162 mm / 6.378 inch
Depth	120 mm / 4.724 inch

Mechanical data

Weight	887 g
Color	black
Housing material	Aluminum
Conformity marking	CE

Environmental requirements

Surrounding air temperature (operation)	-40 ... 70 °C (UL max. +60 °C)
Surrounding air temperature (storage)	-40 ... 85 °C
Protection type	IP30
Relative humidity (without condensation)	95 %
Mounting type	DIN-35 rail
Vibration resistance	per IEC 60068-2-6
Shock resistance	per IEC 60068-2-27
EMC immunity to interference	per EN 61000-6-2
EMC emission of interference	per EN 61000-6-4


Commercial data

PU (SPU)	1 Stück
Packaging type	box
Country of origin	TW
GTIN	4050821157663
Customs tariff number	85176200000

Subject to changes. Please also observe the further product documentation!

Approvals / Certificates

Country specific Approvals

Logo	Approval	Additional Approval Text	Certificate name
	KC National Radio Research Agency	Article 58-2, Clause 3	MSIP- REM-W43- ISW852




Optional accessories

Power supplies




Power supply		
	Item no.: 787-1722 Switched-mode power supply; Eco; 1-phase; 24 VDC output voltage; 5 A output current; DC-OK LED	www.wago.com/787-1722
	Item no.: 787-1712 Switched-mode power supply; Eco; 1-phase; 24 VDC output voltage; 2.5 A output current; DC-OK LED	www.wago.com/787-1712
	Item no.: 787-1702 Switched-mode power supply; Eco; 1-phase; 24 VDC output voltage; 1.25 A output current; DC-OK LED	www.wago.com/787-1702
	Item no.: 787-1632 Switched-mode power supply; Classic; 1-phase; 24 VDC output voltage; 10 A output current; TopBoost; DC OK contact	www.wago.com/787-1632
	Item no.: 787-1102 Switched-mode power supply; Compact; 1-phase; 24 VDC output voltage; 1.3 A output current; DC OK signal	www.wago.com/787-1102
	Item no.: 787-1112 Switched-mode power supply; Compact; 1-phase; 24 VDC output voltage; 2.5 A output current; DC OK signal	www.wago.com/787-1112
	Item no.: 787-1122 Switched-mode power supply; Compact; 1-phase; 24 VDC output voltage; 4 A output current	www.wago.com/787-1122
	Item no.: 787-1602 Switched-mode power supply; Classic; 1-phase; 24 VDC output voltage; 1 A output current; NEC Class 2; DC OK signal	www.wago.com/787-1602
	Item no.: 787-1622 Switched-mode power supply; Classic; 1-phase; 24 VDC output voltage; 5 A output current; TopBoost; DC OK contact	www.wago.com/787-1622
	Item no.: 787-1606 Switched-mode power supply; Classic; 1-phase; 24 VDC output voltage; 2 A output current; NEC Class 2; DC OK signal	www.wago.com/787-1606

Subject to changes. Please also observe the further product documentation!

Interface module

Interface module		
	Item no.: 289-195 Interface module; RJ-45; IDC technology; Cat. 6; in mounting carrier; with shield connection	www.wago.com/289-195
	Item no.: 289-175 Interface module; RJ-45; PCB terminal blocks, double-row; Cat. 5; in mounting carrier; with shield connection; with shield clamping saddle; 1,50 mm ²	www.wago.com/289-175
	Item no.: 289-172 Interface module; RJ-45; RJ-45; Cat. 5; in mounting carrier	www.wago.com/289-172
	Item no.: 289-196 Interface module; RJ-45; with power jumper contacts; PCB terminal blocks; Cat. 5	www.wago.com/289-196

Cables and pluggable connectors

Connector plug		
	Item no.: 750-975 ETHERNET RJ-45 connector, IP20; ETHERNET 10/100 Mbit/s; for field assembly	www.wago.com/750-975
	Item no.: 750-976 PROFINET RJ-45 connector, IP20; ETHERNET 10/100 Mbit/s; for field assembly	www.wago.com/750-976
	Item no.: 750-978/000-012 Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568B; AWG 22; Strain relief	www.wago.com/750-978/000-012
	Item no.: 750-979/000-012 Connector ETHERNET; RJ-45; Cat. 6A; angled; Code T568B; AWG 22; Strain relief	www.wago.com/750-979/000-012
	Item no.: 750-978/000-021 Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568A; AWG 24; Strain relief	www.wago.com/750-978/000-021
	Item no.: 750-979/000-022 Connector ETHERNET; RJ-45; Cat. 6A; angled; Code T568B; AWG 24; Strain relief	www.wago.com/750-979/000-022
	Item no.: 750-978/000-022 Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568B; AWG 24; Strain relief	www.wago.com/750-978/000-022
	Item no.: 750-979/000-011 Connector ETHERNET; RJ-45; Cat. 6A; angled; Code T568A; AWG 22; Strain relief	www.wago.com/750-979/000-011
	Item no.: 750-979/000-013 Connector PROFINET; RJ-45; Cat. 6A; angled; AWG 22; Strain relief	www.wago.com/750-979/000-013

Subject to changes. Please also observe the further product documentation!



Item no.: 750-979/000-021
Connector ETHERNET; RJ-45; Cat. 6A; angled; Code T568A; AWG 24; Strain relief

www.wago.com/750-979/000-021



Item no.: 750-977/000-011
Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568A; AWG 22

www.wago.com/750-977/000-011



Item no.: 750-978/000-013
Connector PROFINET; RJ-45; Cat. 6A; straight; AWG 22; Strain relief

www.wago.com/750-978/000-013



Item no.: 750-978/000-011
Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568A; AWG 22; Strain relief

www.wago.com/750-978/000-011



Item no.: 750-977/000-022
Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568B; AWG 24

www.wago.com/750-977/000-022



Item no.: 750-977/000-012
Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568B; AWG 22

www.wago.com/750-977/000-012



Item no.: 750-977/000-013
Connector PROFINET; RJ-45; Cat. 6A; straight; AWG 22

www.wago.com/750-977/000-013



Item no.: 750-977/000-021
Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568A; AWG 24

www.wago.com/750-977/000-021

Downloads Documentation

Manual

8-Port 100 BASE-TX + 2-Slot 100 BASE-FX Industrial Switch	V 1.0.3 2020. 7. 14.	pdf 1.3 MB	Download
---	-------------------------	---------------	----------

Bid Text

852-103/040-000 X81 - Datei	2019. 2. 19.	xml 5.2 kB	Download
--------------------------------	--------------	---------------	----------

852-103/040-000 docx - Datei	2018. 5. 9.	docx 15.5 kB	Download
---------------------------------	-------------	-----------------	----------

Instruction Leaflet

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Gebrauchs- und Montageanleitung 852-101 / 852-102 / 852-103 / 852-104

pdf
1.7 MB

[Download](#)

System Description

Industrial Switches – General Product Information

pdf
2.0 MB

[Download](#)

Additional Information

Disposal; Electrical and electronic equipment, Packaging

V 1.0.0

pdf
265.8 kB

[Download](#)

CAD/CAE-Data

CAE data

EPLAN Data Portal 852-103/040-000

URL

[Download](#)

WSCAD Universe 852-103/040-000

URL

[Download](#)

EPLAN Data Portal 852-103/040-000

URL

[Download](#)

WSCAD Universe 852-103/040-000

URL

[Download](#)

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 852-103/040-000

URL

[Download](#)

Industrial-Switch; 8-port 100Base-TX; 2 Slots 100Base-FX; Extended temperature range; EXT; black

Installation Notes

Subject to changes. Please also observe the further product documentation!