Silicon NPN Power Transistors 2SC5130

DESCRIPTION

·With TO-220F package
·High voltage.
·High speed switching

APPLICATIONS

·For switching regulator and general purpose applications

PINNING

PIN	DESCRIPTION
1	Base
2	Collector
3	Emitter

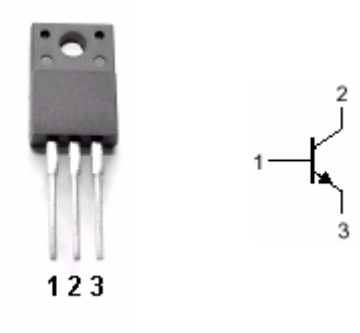


Fig.1 simplified outline (TO-220F) and symbol

Absolute maximum ratings (Ta=25□)

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
V_{CBO}	Collector-base voltage	Open emitter	600	V
V_{CEO}	Collector-emitter voltage	Open base	400	V
V_{EBO}	Emitter-base voltage	Open collector	10	V
I_C	Collector current		5	A
I_{CM}	Collector current-peak		10	A
I_B	Base current		2	A
P_C	Collector dissipation	T_C=25□	30	W
T_j	Junction temperature		150	□
T_{stg}	Storage temperature		-55~150	□

Silicon NPN Power Transistors 2SC5130

CHARACTERISTICS

Tj=25□ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
$V_{(BR)CEO}$	Collector-emitter breakdown voltage	I_C=25mA ; I_B=0	400			V
V_{CEsat}	Collector-emitter saturation voltage	I_C=1.5A ;I_B=0.3A			0.5	V
V_{BEsat}	Base-emitter saturation voltage	I_C=1.5A ;I_B=0.3A			1.3	V
I_{CBO}	Collector cut-off current	V_{CB}=500V; I_E=0			100	μA
I_{EBO}	Emitter cut-off current	V_{EB}=10V; I_C=0			10	μA
h_{FE}	DC current gain	I_C=1.5A ; V_{CE}=4V	10		30	
C_{OB}	Output capacitance	I_E=0; V_{CB}=10V;f=1MHz		30		pF
f_T	Transition frequency	I_C=-0.3A ; V_{CE}=12V		20		MHz

Switching times

t_{on}	Turn-on time	I_C=1.5A; I_{B1}=0.15A I_{B2}=-0.3A V_{CC}=200V ,R_L=133Ω			1.0	μs
t_s	Storage time				2.0	μs
t_f	Fall time				0.3	μs

PACKAGE OUTLINE

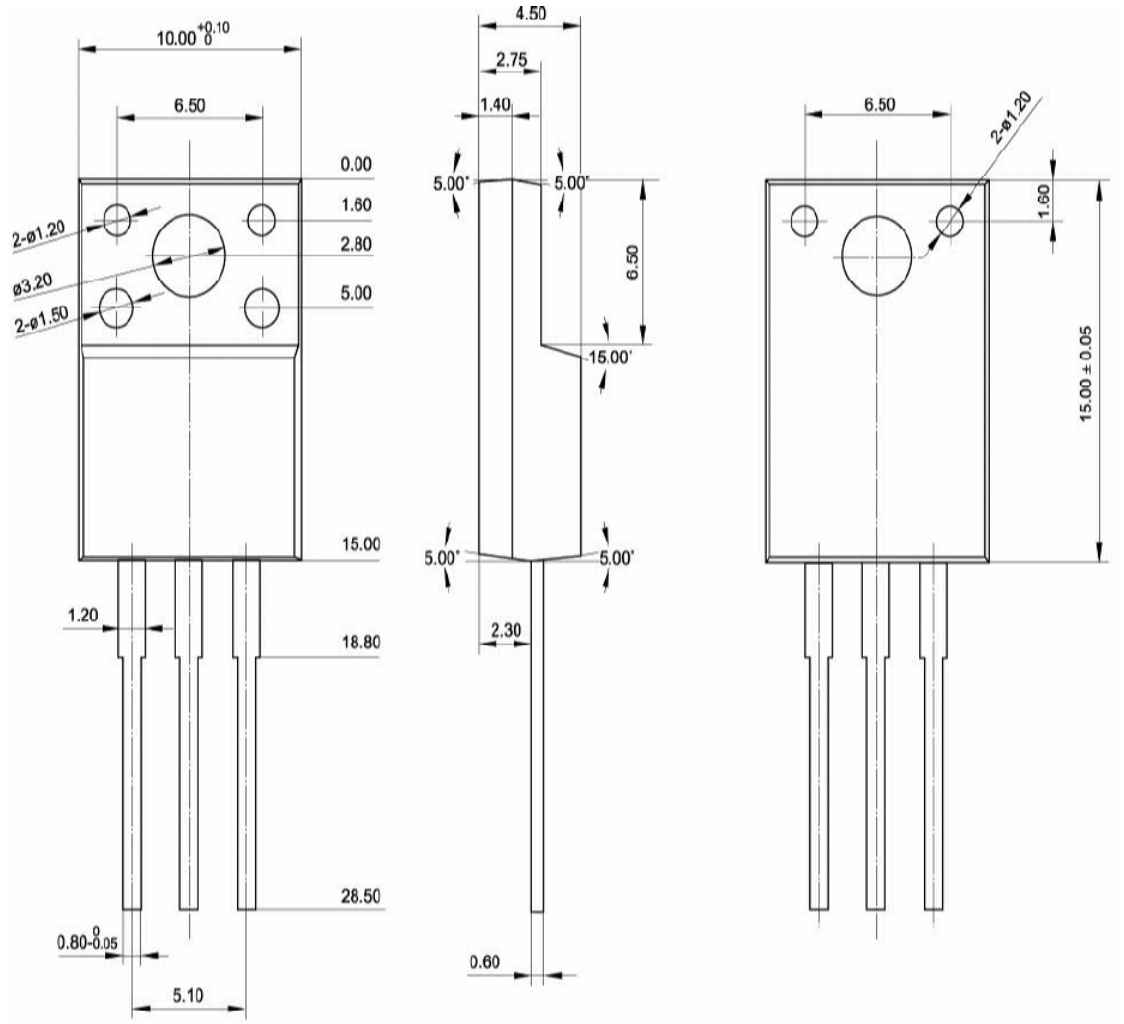


Fig.2 Outline dimensions

Silicon NPN Power Transistors 2SC5130

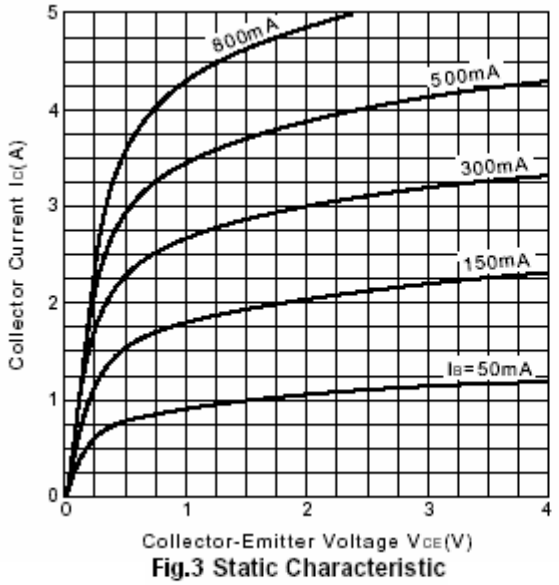


Fig.3 Static Characteristic

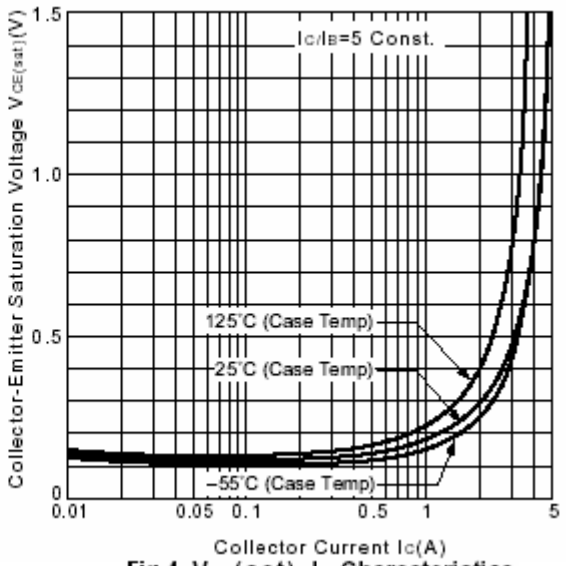


Fig.4 VCE(sat)-IC Characteristics

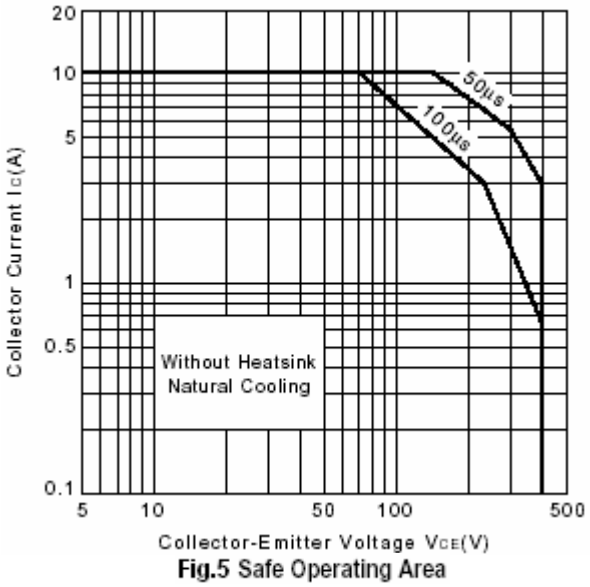


Fig.5 Safe Operating Area

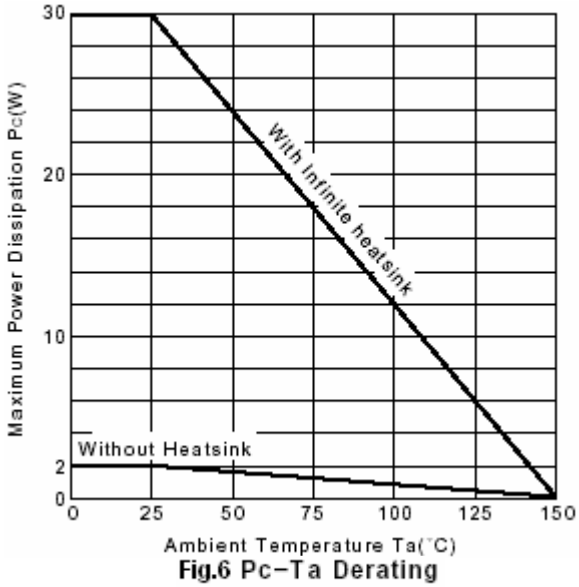


Fig.6 Pc-Ta Derating

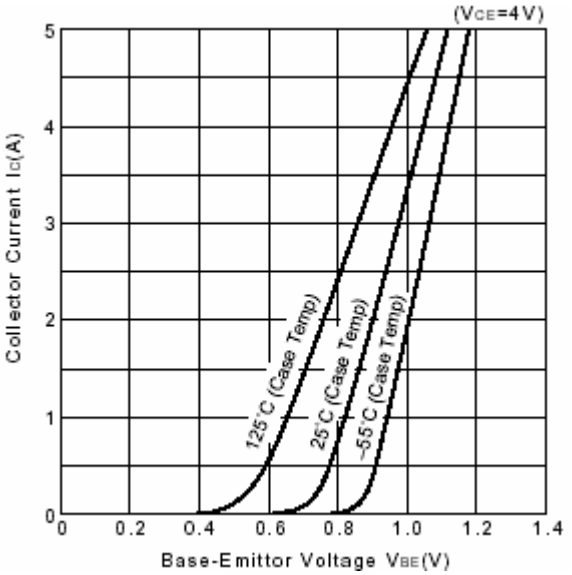


Fig.7 IC-VBE

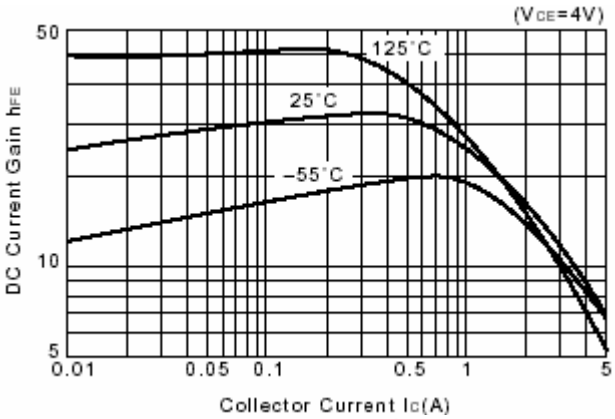


Fig.8 DC current Gain