

OLGA-M

~30° spot beam beam. Assembly with holder and installation tape.


TECHNICAL SPECIFICATIONS:

Dimensions	Ø 32 mm
Height	19.1 mm
Fastening	tape, pin
Colour	black
Box size	476 x 273 x 292 mm
Box weight	9.8 kg
Quantity in Box	792 pcs
ROHS compliant	yes ⓘ



MATERIAL SPECIFICATIONS:



Component	Type	Material	Colour
OLGA-M	Lens	PMMA	clear
OLGA-HLD	Holder	PC	black
SPUTNIK-TAPE3	Tape	PU tape	black

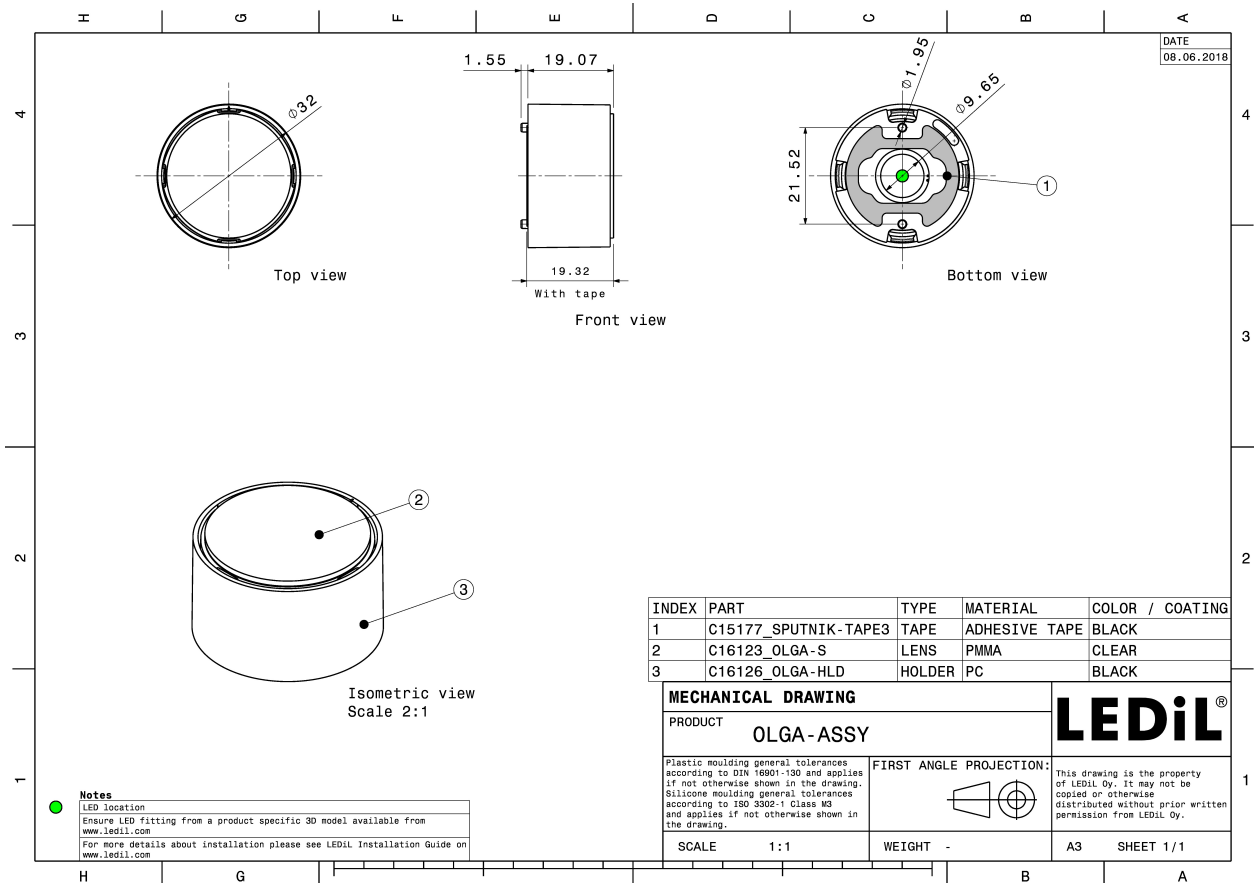



PHOTOMETRIC DATA (MEASURED):





LED XD16
FWHM 26.0°
Efficiency 80 %
Peak intensity 3.200 cd/lm
Required components:

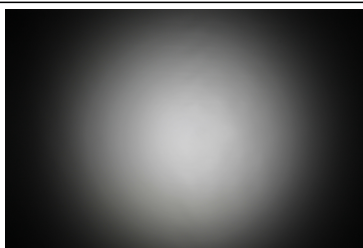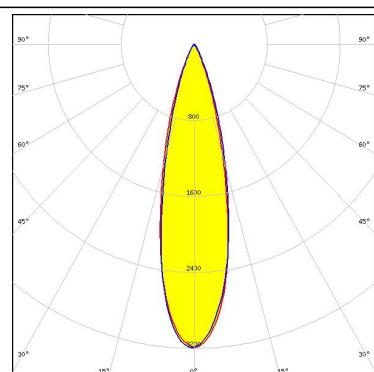



LED XHP35 HI
FWHM 28.0°
Efficiency 84 %
Peak intensity 2.800 cd/lm
Required components:

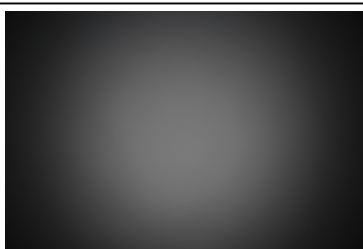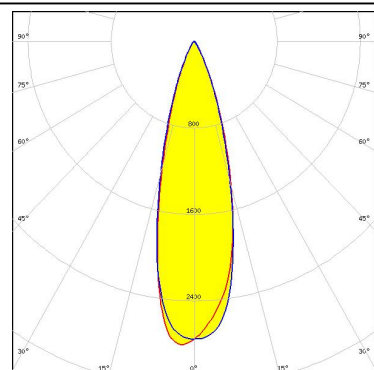

LED XHP70
FWHM 33.0°
Efficiency 82 %
Peak intensity 2.000 cd/lm
Required components:

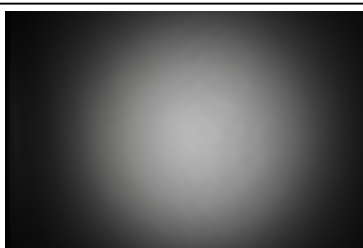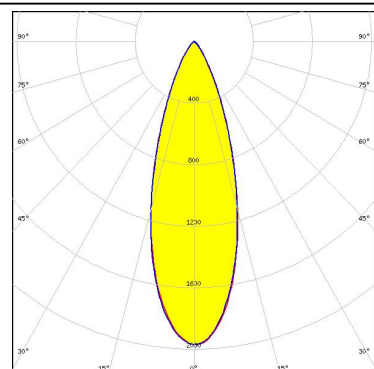



LED XHP70.2
FWHM 34.0°
Efficiency 81 %
Peak intensity 1.900 cd/lm
Required components:

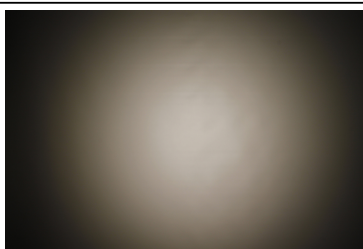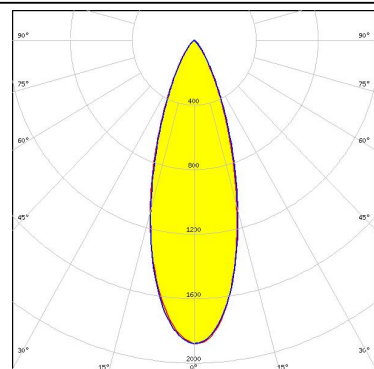



PHOTOMETRIC DATA (MEASURED):





LED XP-G2
FWHM 30.0°
Efficiency 83 %
Peak intensity 2.700 cd/lm
Required components:

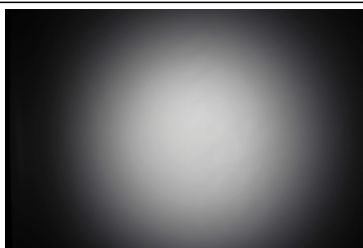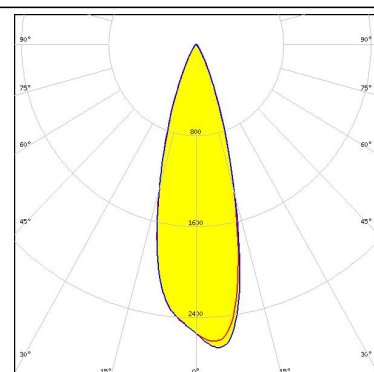



LED XP-L HI
FWHM 28.0°
Efficiency 85 %
Peak intensity 3.000 cd/lm
Required components:

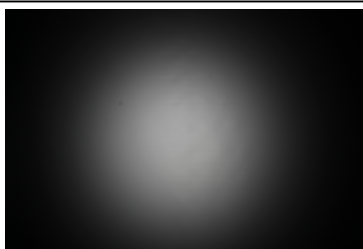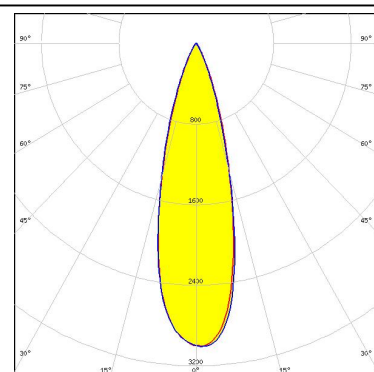

LED XQ-E HI
FWHM 27.0°
Efficiency 83 %
Peak intensity 3.100 cd/lm
Required components:

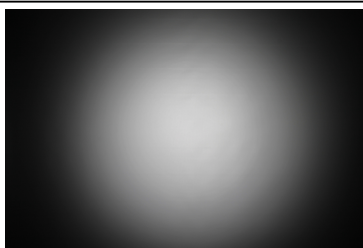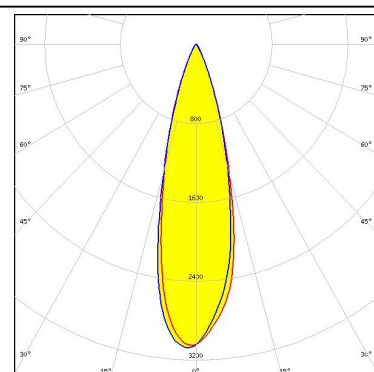



LED LUXEON 5050
FWHM 27.0°
Efficiency 86 %
Peak intensity 3.000 cd/lm
Required components:

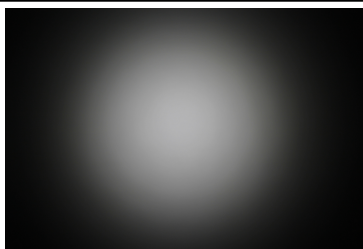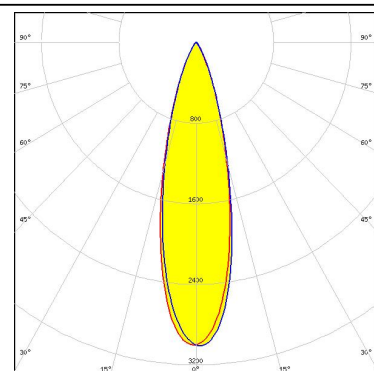



PHOTOMETRIC DATA (MEASURED):





LED LUXEON C
FWHM 29.0°
Efficiency 76 %
Peak intensity 2.600 cd/lm
Required components:

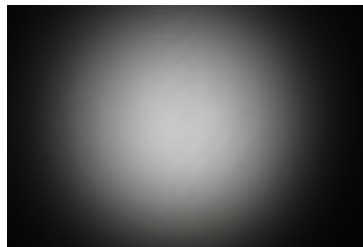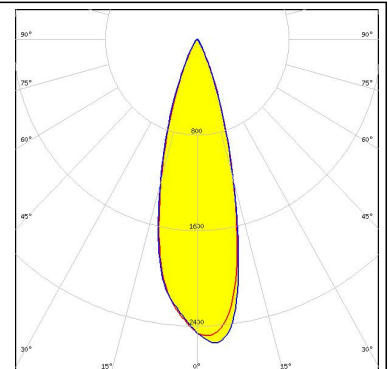



LED LUXEON CZ
FWHM 26.0°
Efficiency 85 %
Peak intensity 3.500 cd/lm
Required components:

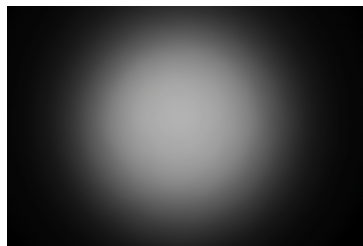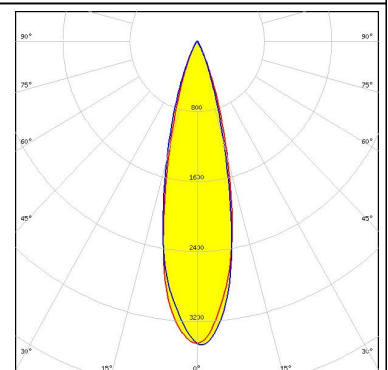

LED LUXEON M/MX
FWHM 31.0°
Efficiency 84 %
Peak intensity 2.300 cd/lm
Required components:

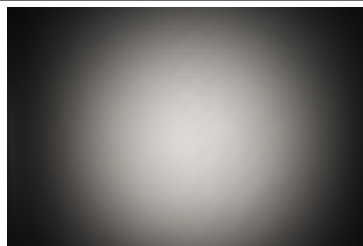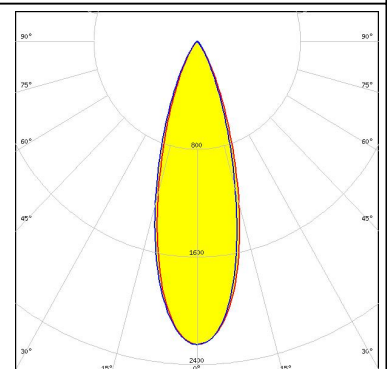



LED LUXEON V
FWHM 28.0°
Efficiency 82 %
Peak intensity 2.700 cd/lm
Required components:

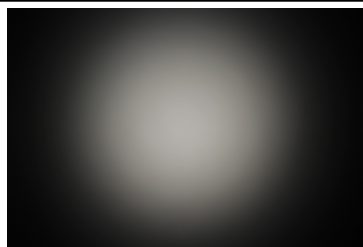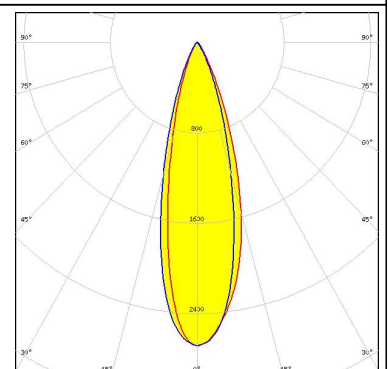



PHOTOMETRIC DATA (MEASURED):





LED LUXEON V
FWHM 29.0°
Efficiency 82 %
Peak intensity 2.600 cd/lm
Required components:

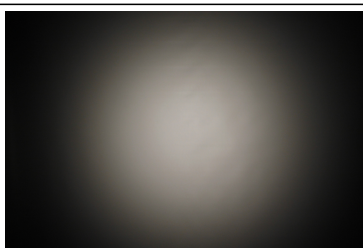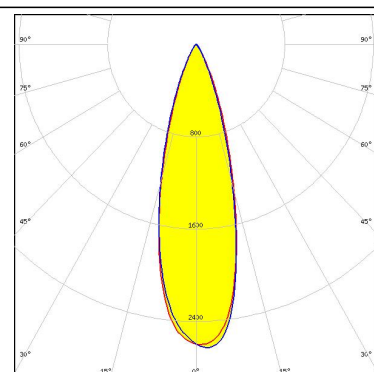



LED NVSW219D
FWHM 31.0°
Efficiency 83 %
Peak intensity 2.400 cd/lm
Required components:

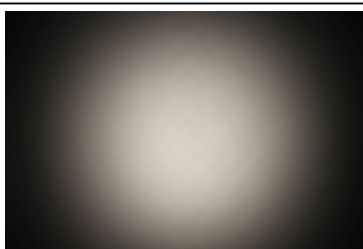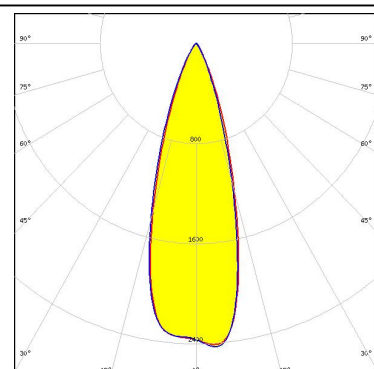

LED Duris S8
FWHM 27.0°
Efficiency 85 %
Peak intensity 2.950 cd/lm
Required components:

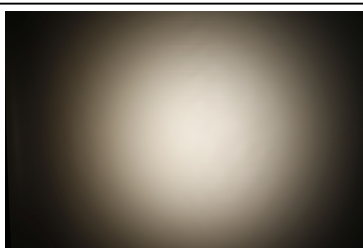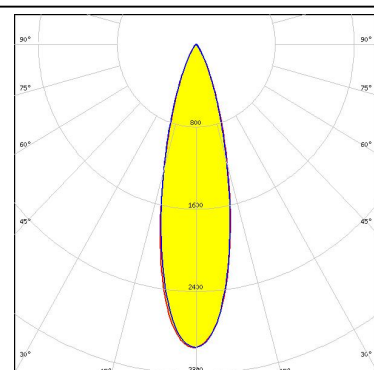



LED Oslon Black Flat
FWHM 24.0°
Efficiency 85 %
Peak intensity 3.900 cd/lm
Required components:

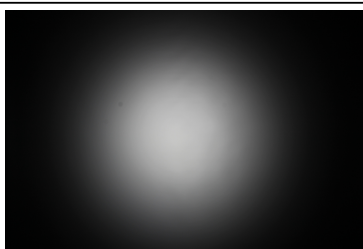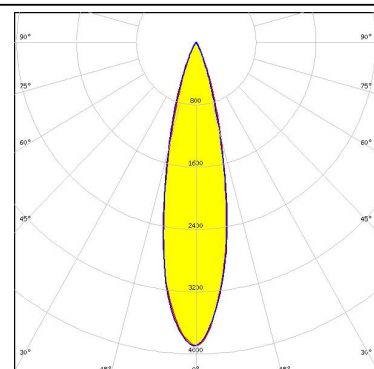

PHOTOMETRIC DATA (MEASURED):



OSRAM
Opto Semiconductors

LED Oslon Square EC
FWHM 28.0°
Efficiency 81 %
Peak intensity 2.900 cd/lm
Required components:

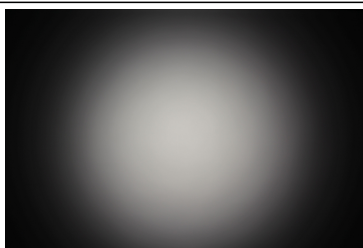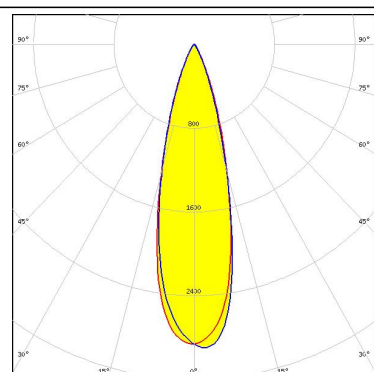



OSRAM
Opto Semiconductors

LED Oslon Square Gen3
FWHM 30.0°
Efficiency 84 %
Peak intensity 2.700 cd/lm
Required components:

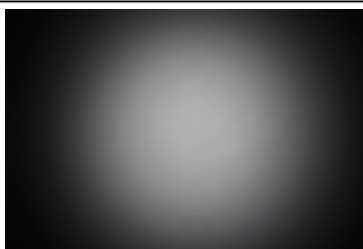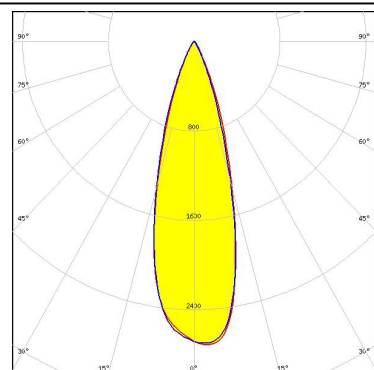



OSRAM
Opto Semiconductors

LED Oslon SSL 150
FWHM 30.0°
Efficiency 82 %
Peak intensity 2.700 cd/lm
Required components:

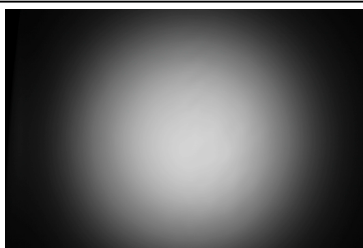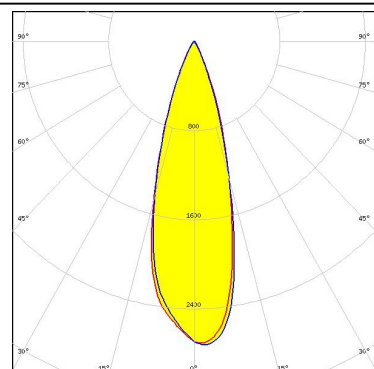

SAMSUNG



LED LH351B
FWHM 30.0°
Efficiency 84 %
Peak intensity 2.700 cd/lm
Required components:

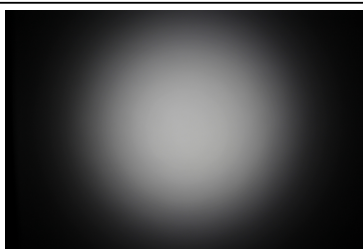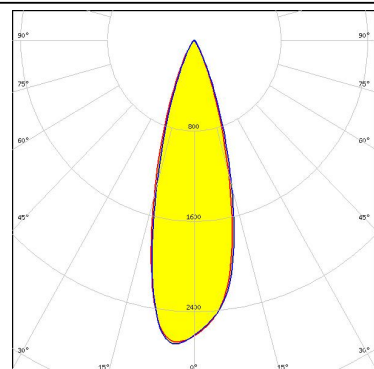

PHOTOMETRIC DATA (MEASURED):

SAMSUNG


LED LM302A
FWHM 25.0°
Efficiency 85 %
Peak intensity 3.400 cd/lm
Required components:

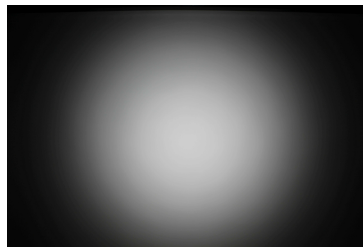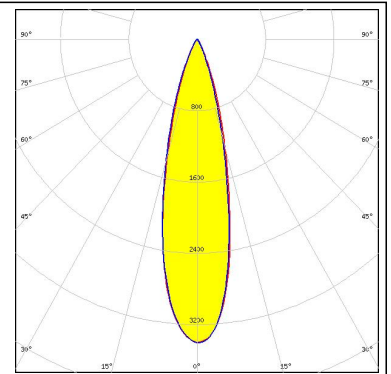

PHOTOMETRIC DATA (SIMULATED):


CITIZEN

LED PSL440
FWHM 26.0°
Efficiency 87 %
Peak intensity 3.780 cd/lm
Required components:

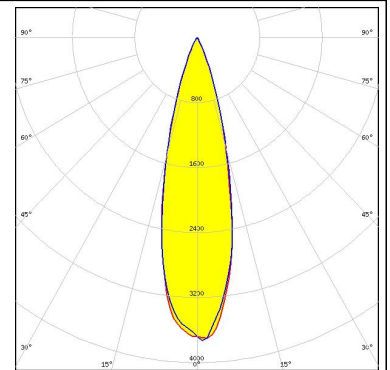


CITIZEN

LED PSL445
FWHM 30.0°
Efficiency 89 %
Peak intensity 2.780 cd/lm
Required components:

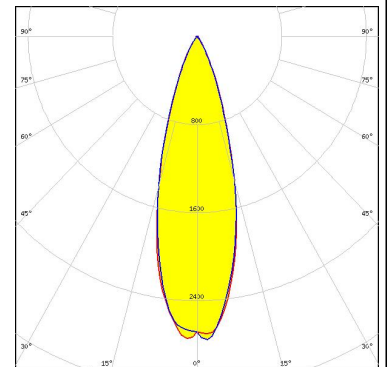


CREE

LED XHP50
FWHM 28.0°
Efficiency 91 %
Peak intensity 3.549 cd/lm
Required components:

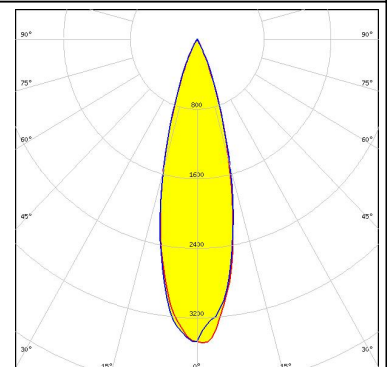

LUMILEDS


LED LUXEON MZ
FWHM 22.0°
Efficiency 91 %
Peak intensity 5.407 cd/lm
Required components:

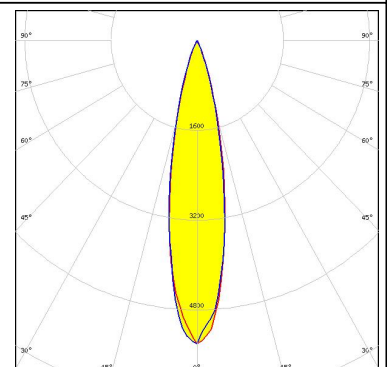


PHOTOMETRIC DATA (SIMULATED):



LED NFMW48xA
FWHM 25.0°
Efficiency 92 %
Peak intensity 4.300 cd/lm
Required components:

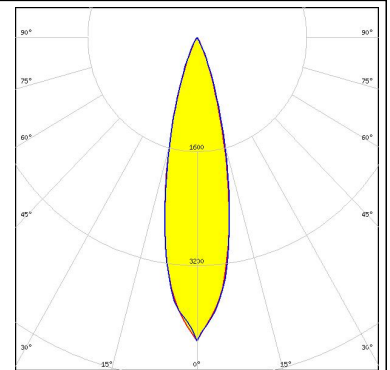

LED NV4x144A
FWHM 31.0°
Efficiency 86 %
Peak intensity 2.740 cd/lm
Required components:

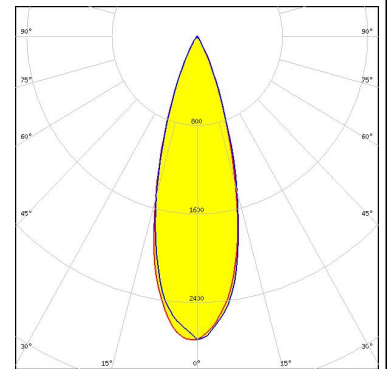

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy

Joensuunkatu 13
FI-24240 SALO
Finland

LEDiL Inc.

228 West Page Street
Suite D
Sycamore IL 60178
USA

Local sales and technical support

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)

Shipping locations

Salo, Finland
Hong Kong, China

Distribution Partners

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)