


DASH NO.	M CODE	MADE FROM
----------	--------	-----------

GSD

KC-59-72	REVISIONS	
	ISSUE	CHANGES
	8	CN 33607 C REDRAWN KH 12/19/91
KAM1672		

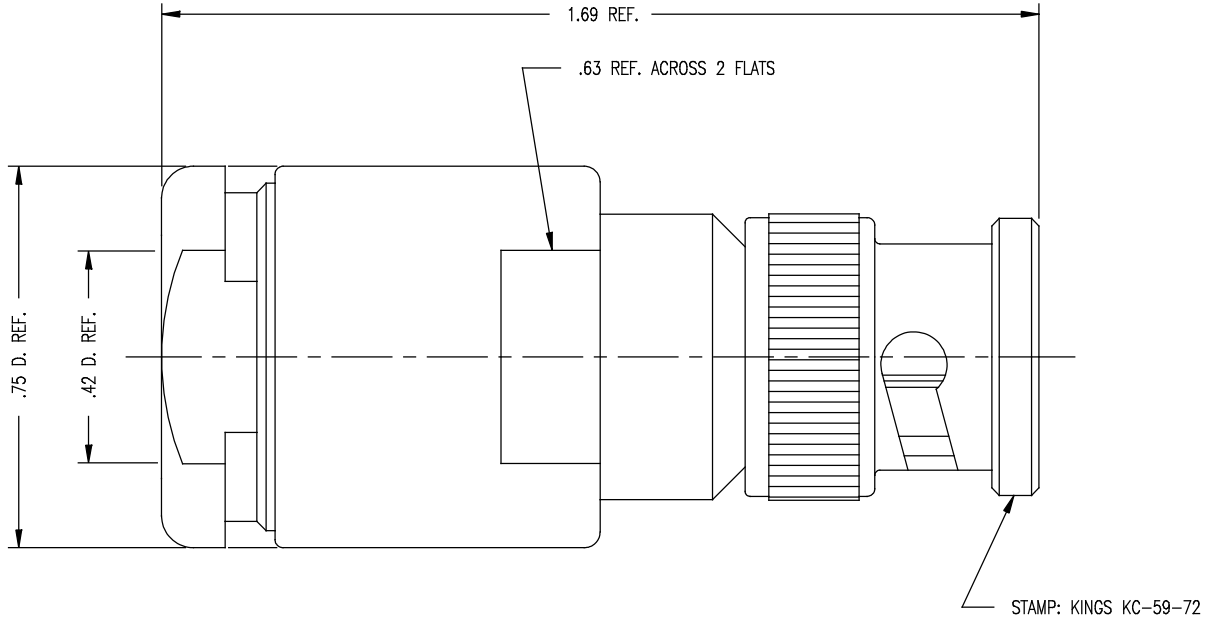

- NOTES:
- FOR USE WITH RG-114A/U CABLE.
  - FOR CABLING INSTRUCTIONS SEE CP-213A.
  - FOR CABLE TRIMMING USE KTJ-22 & KTD-81.
  - FOR CRIMPING USE DIE KTH-2003.
  - INTERFACE PER MIL-STD-348, FIG. 301-1.
  - MATERIALS:
    - INSULATORS: TEFLON, ASTM-D-1457
    - GASKETS: SILICONE RUBBER, ZZ-R-765
    - K-GRIP SLEEVE: COMMERCIAL BRONZE, ALLOY 220
    - OUTER CONTACT } BER. COP., ASTM-B-196
    - SPRING WASHER } BER. COP., ASTM-B-196
    - ALL OTHER METAL PARTS: BRASS, ASTM-B16
  - FINISHES:
    - CENTER CONTACT: GOLD PLATE PER MIL-G-45204
    - ALL OTHER METAL PARTS: SILVER PLATE PER QQ-S-365
  - ELECTRICAL CHARACTERISTICS:
    - NOMINAL IMPEDANCE: 50 OHMS
    - FREQUENCY RANGE: DC TO 4 GHZ
    - WORKING VOLTAGE: 500 VRMS

SCALE	4:1	
APPROX SURFACE AREA		
USED ON		
REF:	BELL 30-111 REV. C	
PLUG, BNC		
DRAWN	KH	DATE 12/19/91
DESIGN	MJB	DATE 12/20/91
APPR.		DATE
 TUCKAHOE, NEW YORK 10707		

GSD

KC-59-72