

## 150mA LDO REGULATOR


## ■ DESCRIPTION

The UTC **LR9280** is a typical LDO (linear regulator) with the features of high output voltage accuracy, low supply current, low ON-resistance. Internally, there're many functions of UTC **LR9280** which can be seen in the block figure. There are a voltage reference unit, an error amplifier, resistor-net for voltage setting, a current limit circuit, and a chip enable circuit in each UTC **LR9280**.

The output voltage of these ICs is fixed with high accuracy. B version has a chip enable pin, therefore low consumption current standby mode can be realized with the pin.

## ■ FEATURES

- \* Output voltage accuracy ( $\pm 2.0\%$ )
- \* Output voltage Range (1.2V~3.6V)
- \* Dropout voltage (TYP=0.25V )(I<sub>OUT</sub>=150mA 3.0V Output type)
- \* Line regulation (TYP=0.05%/V)
- \* Temperature-Drift Coefficient of Output Voltage (TYP= $\pm 100\text{ppm}/^{\circ}\text{C}$ )
- \* Ceramic capacitors are recommended to be used with this IC (1 $\mu\text{F}$ )



SOT-23-5  
(JEDEC TO-236)


## ■ ORDERING INFORMATION

| Ordering Number   | Package  | Packing   |
|-------------------|----------|-----------|
| LR9280xG-xx-AE5-R | SOT-23-5 | Tape Reel |

Note: xx: Output Voltage, refer to Marking Information.

|  |
|--|
| <br>(1)R: Tape Reel<br>(2)AE5: SOT-23-5<br>(3)xx: refer to Marking Information<br>(4)G: Halogen Free and Lead Free<br>(5)B: Active high type<br>C: Without chip enable circuit |
|--|

■ MARKING INFORMATION
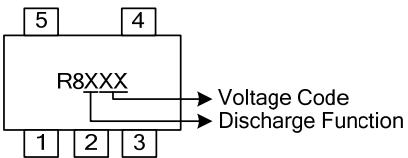
| PACKAGE  | VOLTAGE CODE                                 | MARKING  |
|----------|--|--|
| SOT-23-5 | 12: 1.2V<br>15: 1.5V<br>18: 1.8V<br>28: 2.8V |  |



■ PIN CONFIGURATION



■ PIN DESCRIPTION

| PIN NO. |         | PIN NAME         | DESCRIPTION     |
|---------|---------|------------------|-----------------|
| LR9280B | LR9280C |                  |                 |
| 1       | 1       | V <sub>DD</sub>  | Input pin       |
| 2       | 2       | GND              | Ground pin      |
| 3       | -       | CE               | Chip Enable Pin |
| 4       | 3, 4    | NC               | No Connection   |
| 5       | 5       | V <sub>OUT</sub> | Output pin      |

## ■ BLOCK DIAGRAM

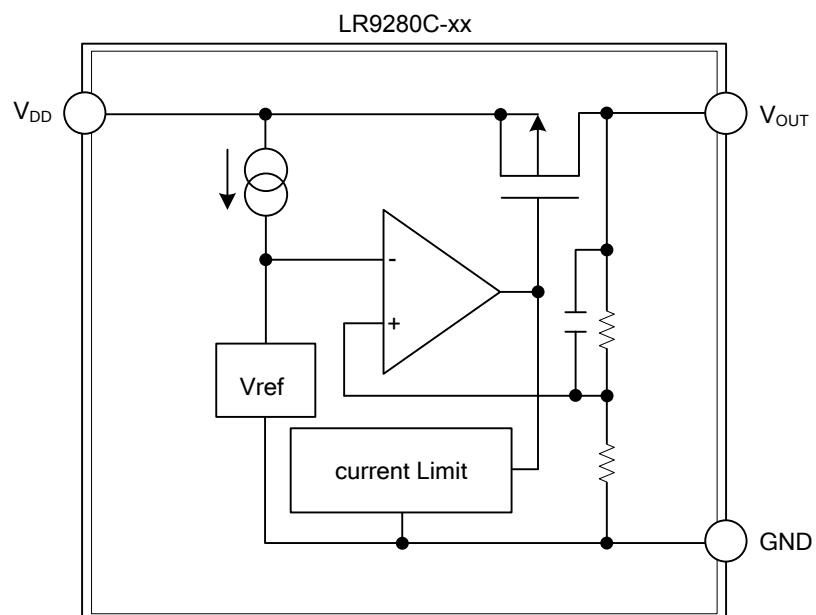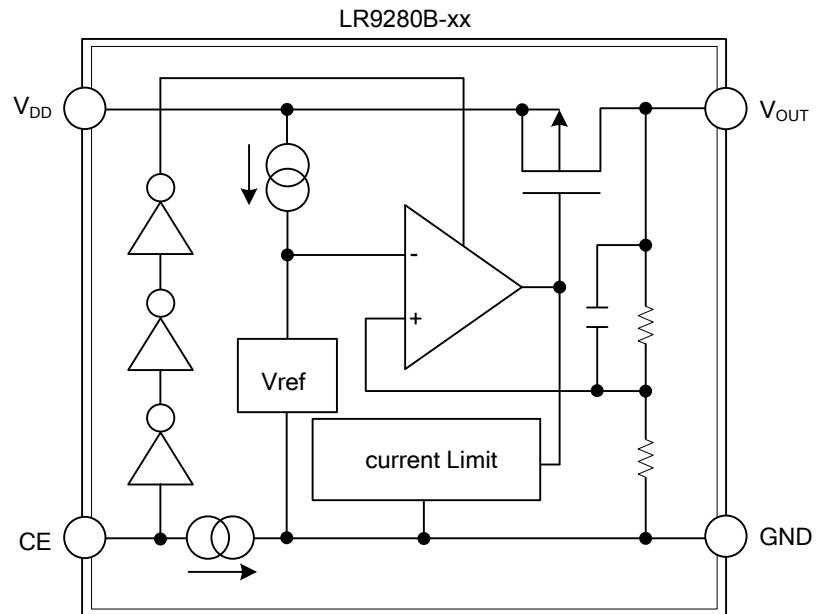

■ ABSOLUTE MAXIMUM RATING

| PARAMETER             | SYMBOL    | RATINGS             | UNIT |
|-----------------------|-----------|---------------------|------|
| Input Voltage         | $V_{IN}$  | 6.5                 | V    |
| Input Voltage(CE Pin) | $V_{CE}$  | 6.5                 | V    |
| Output Voltage        | $V_{OUT}$ | -0.3~ $V_{IN}$ +0.3 | V    |
| Output Current        | $I_{OUT}$ | 180                 | mA   |
| Power Dissipation     | $P_D$     | 420                 | mW   |
| Operating Temperature | $T_{OPR}$ | -40~85              | °C   |
| Storage Temperature   | $T_{STG}$ | -55~125             | °C   |



Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.


■ ELECTRICAL CHARACTERISTICS ( $T_A=25^\circ C$ , unless otherwise noted)

| PARAMETER                              | SYMBOL                          | TEST CONDITIONS  | MIN                   | TYP  | MAX    | UNIT   |
|--|---------------------------------|--|-----------------------|------|--------|--------|
| Output Voltage                         | $V_{OUT}$                       | $V_{IN}=Set\ V_{OUT}+1V, 1\mu A \leq I_{OUT} \leq 30mA$  | x0.980                |      | x1.020 | V      |
| Output Current                         | $I_{OUT}$                       | $V_{IN}-V_{OUT}=1.0V(V_{OUT} \geq 1.5V)$<br>$V_{IN}=2.4V(V_{OUT}<1.5V)$  | 150                   |      |        | mA     |
| Dropout Voltage                        | $V_{DIF}$                       | $I_{OUT}=150mA$  | 1.2≤ $V_{OUT}<1.3$    |      | 0.85   | V      |
|  |                                 |  | 1.3≤ $V_{OUT}<1.4$    |      | 0.75   | V      |
|  |                                 |  | 1.4≤ $V_{OUT}<1.5$    |      | 0.65   | V      |
|  |                                 |  | 1.5≤ $V_{OUT}<1.7$    |      | 0.60   | V      |
|  |                                 |  | 1.7≤ $V_{OUT}<1.9$    |      | 0.50   | V      |
|  |                                 |  | 1.9≤ $V_{OUT}<2.1$    |      | 0.40   | V      |
|  |                                 |  | 2.1≤ $V_{OUT}<2.8$    |      | 0.35   | V      |
|  |                                 |  | 2.8≤ $V_{OUT}\leq3.6$ |      | 0.25   | V      |
| Input Voltage                          | $V_{IN}$                        |  | 1.7                   |      | 6.0    | V      |
| Supply Current                         | $I_{SS}$                        | $V_{IN}-V_{OUT}=1.0V, I_{OUT}=0mA$   |                       | 0.7  | 1.5    | μA     |
| Standby Current                        | $I_{STB}$                       | $V_{IN}-V_{OUT}=1.0V, V_{CE}=GND$  |                       | 0.1  | 1.0    | μA     |
| Load Regulation                        | $\Delta V_{OUT}/\Delta I_{OUT}$ | $V_{IN}-V_{OUT}=1.0V(V_{OUT} \geq 1.5V)$<br>$V_{IN}=2.4V(V_{OUT}<1.5V)$<br>$1\mu A \leq I_{OUT} \leq 150mA$  |                       | 20   | 40     | mV     |
|  |                                 |  |                       |      |        |        |
| Line Regulation                        | $\Delta V_{OUT}/\Delta V_{IN}$  | $I_{OUT}=30mA$<br>$V_{OUT}+0.5V \leq V_{IN} \leq 6.0V$<br>( $V_{OUT} \geq 1.5V$ ), $2.0V \leq V_{IN} \leq 6.0V$<br>( $1.2V \leq V_{OUT} \leq 1.4V$ ) |                       | 0.05 | 0.20   | %/V    |
| Output Voltage Temperature Coefficient | $\Delta V_{OUT}/\Delta T_{OPT}$ | $I_{OUT}=30mA, -40^\circ C \leq T_{OPT} \leq 85^\circ C$   |                       | ±100 |        | ppm/°C |
| Short Current Limit                    | $I_{SC}$                        | $V_{OUT}=0V$   |                       | 500  |        | mA     |
| CE Pull-down Constant Current          | $I_{PD}$                        | LR9280B  |                       | 0.35 |        | μA     |
| CE Input Voltage "H"                   | $V_{CEH}$                       | LR9280B  | 1.2                   |      | 6.0    | V      |
| CE Input Voltage "L"                   | $V_{CEL}$                       | LR9280B  | 0.0                   |      | 0.3    | V      |

## ■ TEST CIRCUITS

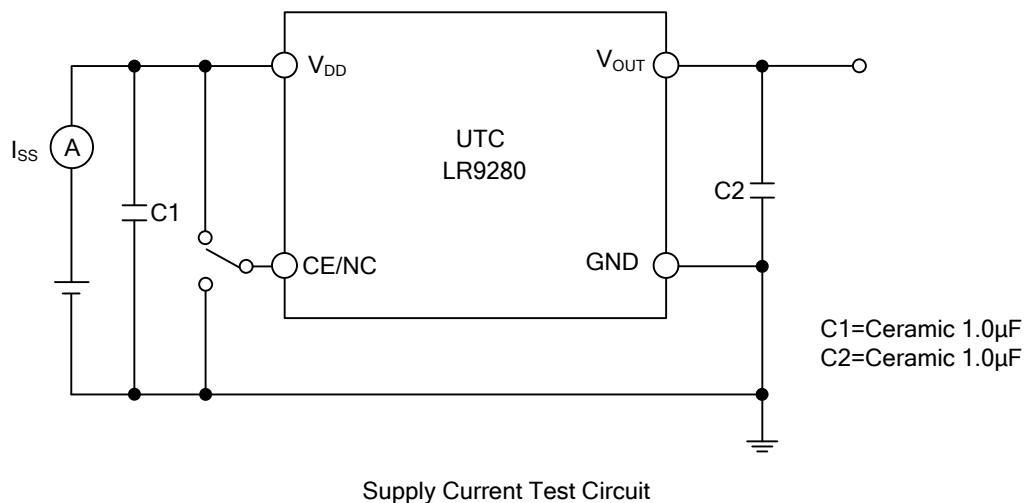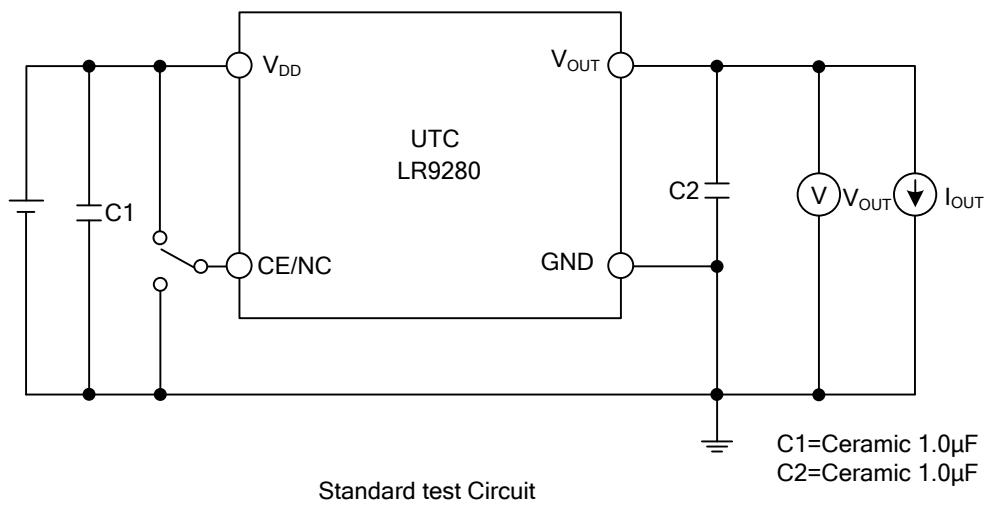


Supply Current Test Circuit

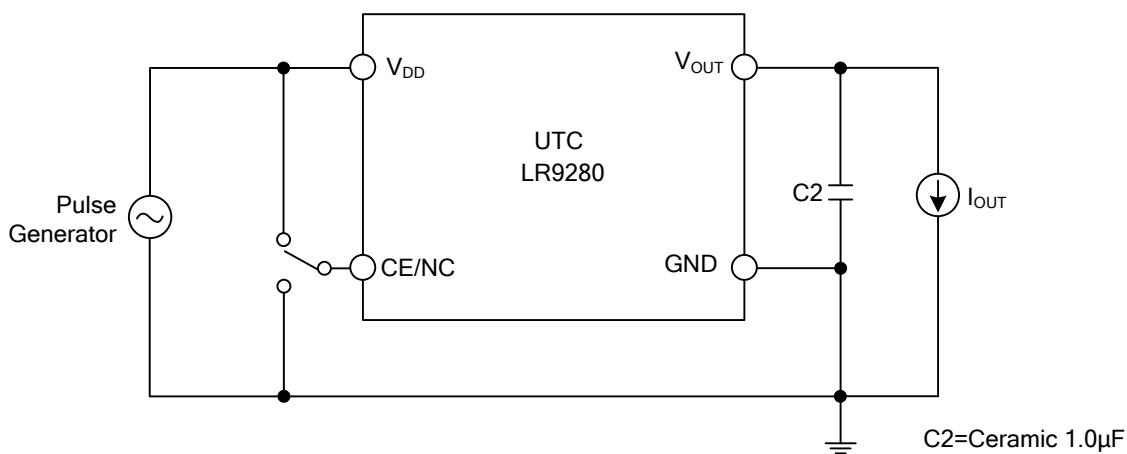

Ripple Rejection, Line Transient Response Test Circuit

## ■ TYPICAL APPLICATION CIRCUIT

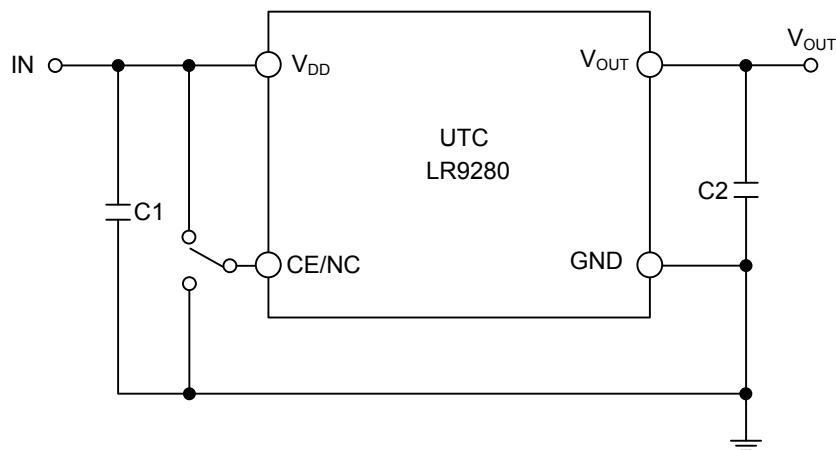

(External Components)

Output Capacitor

Ceramic Capacitor 1μF

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.