

8961726 TEXAS INSTR (OPTO)


62C 37113 D

TIPL785, TIPL785A, TIPL790, TIPL790A N-P-N MONOLITHIC DARLINGTON CONNECTED SILICON POWER TRANSISTORS


OCTOBER 1982 - REVISED OCTOBER 1984

- Rugged Epitaxial Planar Construction
- Designed For Low-Loss, High-Current, High-Speed Switching Applications
- t_{x0} Typically 320 ns at $I_C = 10$ A
- Operating Characteristics Fully Guaranteed at 100°C
- $I_{CES} < 1$ mA at Maximum Rated V_{CE} at 100°C
- $V_{CEO(sus)}$:
 TIPL785, TIPL790 ... 120 V Min
 TIPL785A, TIPL790A ... 150 V Min


TIPL785, TIPL785A ... TO-218AA PACKAGE

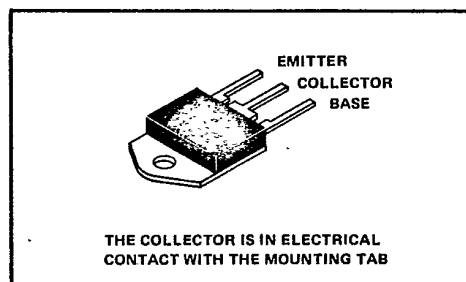

TIPL790, TIPL790A ... TO-220AB PACKAGE

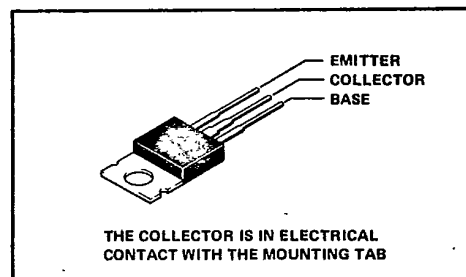

device schematic



absolute maximum ratings at 25°C case temperature (unless otherwise noted)

	TIPL785	TIPL785A	TIPL790	TIPL790A
Collector-base voltage	160 V	210 V	160 V	210 V
Collector-emitter voltage ($V_{BE} = 0$)	150 V	200 V	150 V	200 V
Collector-emitter voltage ($I_B = 0$)	120 V	150 V	120 V	150 V
Continuous device dissipation at (or below) 25°C case temperature	80 W		70 W	
Base-emitter voltage	8 V			
Continuous collector current	10 A			
Peak collector current (see Note 1)	15 A			
Peak parallel diode forward current (see Note 1)	10 A			
Operating collector junction and storage temperature range	− 65°C to 150°C			

NOTE 1: This value applies for $t_W = 2$ ms, duty cycle $\leq 2\%$

TIPL Devices

6

8961726 TEXAS INSTR (OPTO)

62C 37114 D

T-33-29

TIPL785, TIPL785A, TIPL790, TIPL790A
N-P-N MONOLITHIC DARLINGTON-CONNECTED
SILICON POWER TRANSISTORS

electrical characteristics at 25°C case temperature (unless otherwise noted)

PARAMETER	TEST CONDITIONS	TIPL785, TIPL785A			TIPL790, TIPL790A			UNIT
		MIN	TYP	MAX	MIN	TYP	MAX	
$V_{(BR)CBO}$	$I_C = 1 \text{ mA}$, See Note 3	160			210			V
$V_{CEO(sust)}$	$I_C = 100 \text{ mA}$, $L = 25 \text{ mH}$, See Note 2	120			150			V
I_{CEV}	$V_{CE} = 150 \text{ V}$, $V_{BE} = -1.5 \text{ V to } -8 \text{ V}$		50					μA
	$V_{CE} = 200 \text{ V}$, $V_{BE} = -1.5 \text{ V to } -8 \text{ V}$				50			μA
I_{CES}	$V_{CE} = 150 \text{ V}$, $V_{BE} = 0$		50					μA
	$V_{CE} = 200 \text{ V}$, $V_{BE} = 0$				50			μA
	$V_{CE} = 150 \text{ V}$, $V_{BE} = 0$, $T_C = 100^\circ\text{C}$		1					mA
	$V_{CE} = 200 \text{ V}$, $V_{BE} = 0$, $T_C = 100^\circ\text{C}$				1			mA
I_{CEO}	$V_{CE} = 120 \text{ V}$, $I_B = 0$		50					μA
	$V_{CE} = 150 \text{ V}$, $I_B = 0$				50			μA
I_{EBO}	$V_{EB} = 5 \text{ V}$, $I_C = 0$		4		4			mA
h_{FE}	$V_{CE} = 5 \text{ V}$, $I_C = 500 \text{ mA}$, See Notes 3 and 4	60		500	60		500	
$V_{CE(sat)}$	$I_C = 4 \text{ A}$, $I_B = 0.02 \text{ A}$, See Notes 3 and 4		1.2			1.2		V
	$I_C = 7 \text{ A}$, $I_B = 0.03 \text{ A}$, See Notes 3 and 4		1.5			1.5		V
	$I_C = 10 \text{ A}$, $I_B = 0.05 \text{ A}$, See Notes 3 and 4		2			2		V
	$I_C = 10 \text{ A}$, $I_B = 0.05 \text{ A}$, $T_C = 100^\circ\text{C}$, See Notes 3 and 4		2			2		V
$V_{BE(sat)}$	$I_C = 4 \text{ A}$, $I_B = 0.02 \text{ A}$, See Notes 3 and 4		1.8			1.8		V
	$I_C = 7 \text{ A}$, $I_B = 0.03 \text{ A}$, See Notes 3 and 4		1.9			1.9		V
	$I_C = 10 \text{ A}$, $I_B = 0.05 \text{ A}$, See Notes 3 and 4		2.2			2.2		V
	$I_C = 10 \text{ A}$, $I_B = 0.05 \text{ A}$, $T_C = 100^\circ\text{C}$, See Notes 3 and 4		2.1			2.1		V
V_F	$I_F = 10 \text{ A}$, See Notes 3 and 4		3			3		V
C_{obo}	$V_{CB} = 20 \text{ V}$, $I_E = 0$, $f = 0.1 \text{ MHz}$		90			90		pF
f_t	$I_C = 500 \text{ mA}$, $V_{CE} = 10 \text{ V}$, See Note 5		10			10		MHz

NOTES: 2. Inductive loop switching measurement.

3. These parameters are measured using pulse techniques pulse width = 300 μs , duty cycle = 2 %.

4. These parameters are measured with voltage-sensing contacts separated from the current-carrying contacts located within 3.2 mm (0.125 inches) from the device body.

5. To obtain f_t , the $|h_{fe}|$ response is extrapolated at the rate of -6 dB per octave from $f = 1 \text{ MHz}$ to the frequency at which $|h_{fe}| = 1$.

thermal characteristics

PARAMETER	TIPL785, TIPL785A			TIPL790, TIPL790A			UNIT
	MIN	TYP	MAX	MIN	TYP	MAX	
$R_{\theta JC}$		1.56			1.79		$^\circ\text{C/W}$

TIPL Devices

6

8961726 TEXAS INSTR (OPTO)

62C 37115 D

TIPL785, TIPL785A, TIPL790, TIPL790A
N-P-N MONOLITHIC DARLINGTON-CONNECTED
SILICON POWER TRANSISTORS

inductive-load switching characteristics

T-33-29

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
t_{sl}	$I_C = 10\text{ A}, \quad I_{B1} = 0.05\text{ A}, \quad I_{B2} = -2.5\text{ A}$ $V_{BE(off)} = -5\text{ V}, \quad \text{See Figures 1, 2, 3 and 4}$	450	700		ns
t_{rv}		160	750		ns
t_{fi}		250	400		ns
t_{ti}		280	450		ns
t_{xo}		320	500		ns

PARAMETER MEASUREMENT INFORMATION

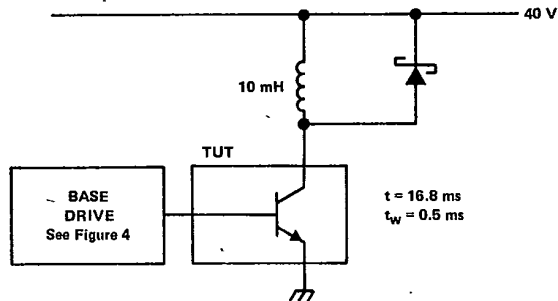


FIGURE 1. INDUCTIVE-LOAD SWITCHING — Collector Test Circuit

TIPL Devices

6

8961726 TEXAS INSTR (OPTO)

62C 37116 D

T-33-29

TIPL785, TIPL785A, TIPL790, TIPL790A
N-P-N MONOLITHIC DARLINGTON-CONNECTED
SILICON POWER TRANSISTORS

TYPICAL CHARACTERISTICS

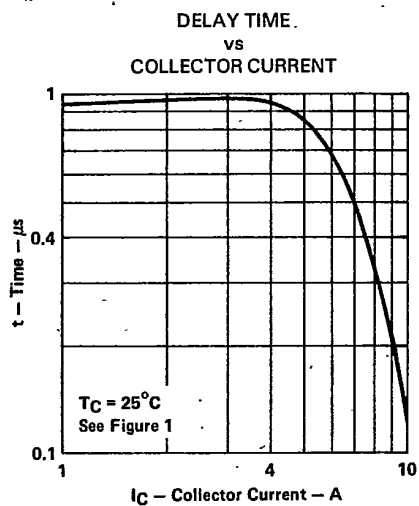


FIGURE 2

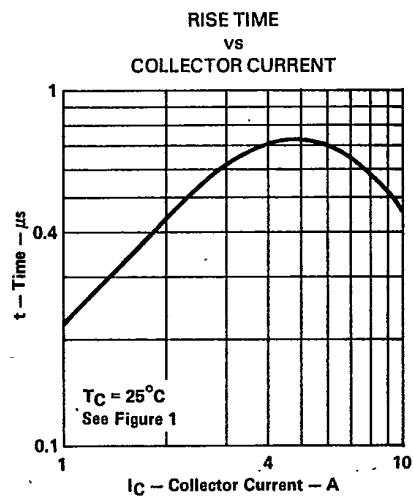


FIGURE 3

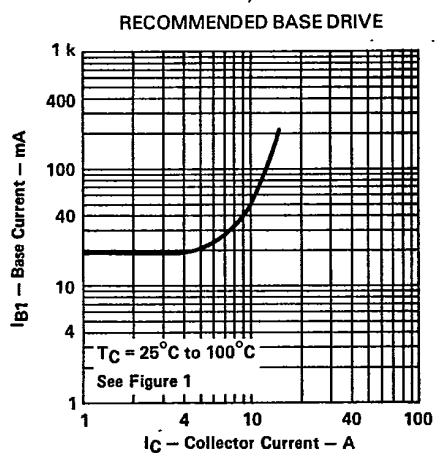


FIGURE 4

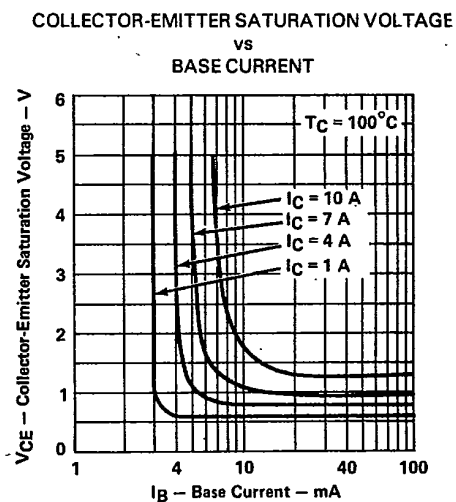


FIGURE 5

TIPL Devices



8961726 TEXAS INSTR (OPTO)

62C 37117 D

TIPL785, TIPL785A, TIPL790, TIPL790A
N-P-N MONOLITHIC DARLINGTON-CONNECTED
SILICON POWER TRANSISTORS

TYPICAL CHARACTERISTICS

T-33-29

BASE-EMITTER SATURATION VOLTAGE
vs
BASE CURRENT

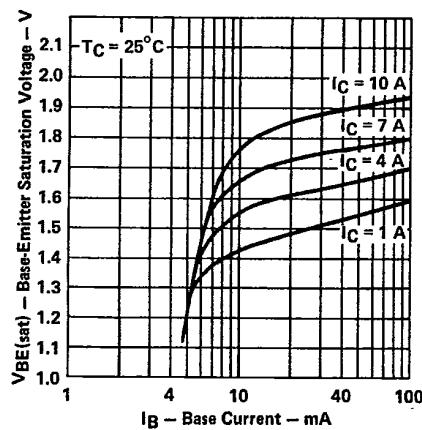


FIGURE 6

STATIC FORWARD CURRENT TRANSFER RATIO
vs
COLLECTOR CURRENT

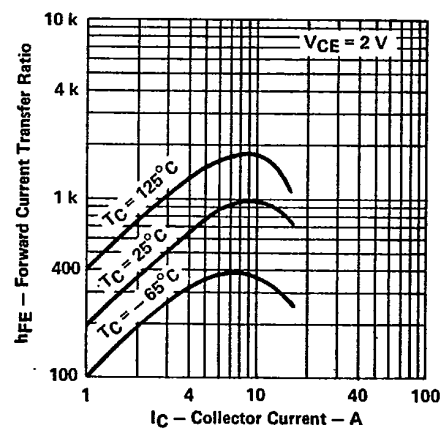


FIGURE 7

COLLECTOR CUTOFF CURRENT
vs
TEMPERATURE

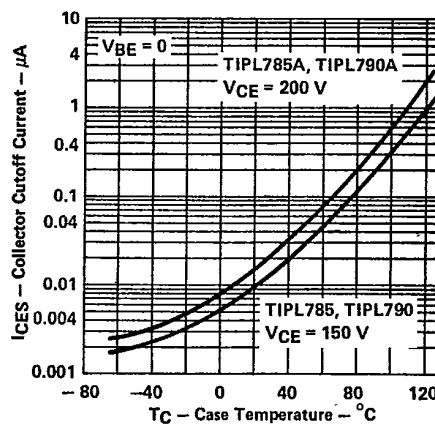


FIGURE 8

TIPL Devices

6

8961726 TEXAS INSTR (OPTO)

62C 37118 D

T-33-29

TIPL785, TIPL785A, TIPL790, TIPL790A
N-P-N MONOLITHIC DARLINGTON-CONNECTED
SILICON POWER TRANSISTORS

MAXIMUM SAFE OPERATING AREA

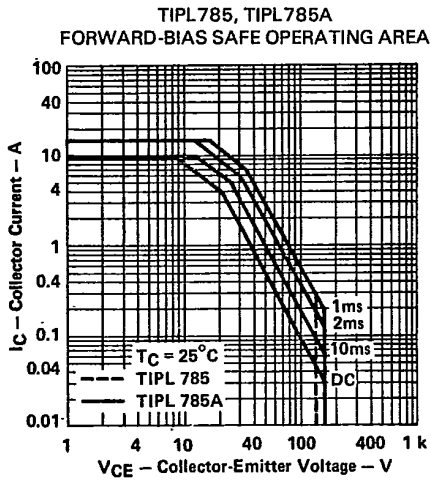


FIGURE 9

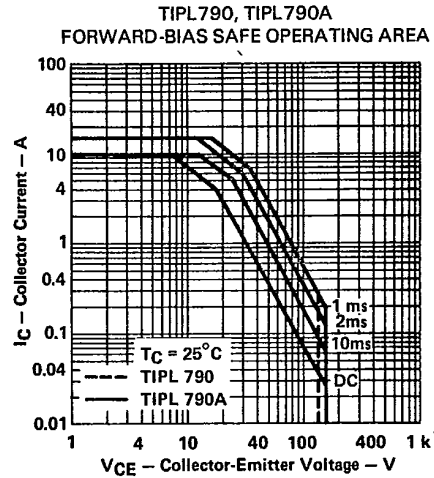


FIGURE 10

THERMAL INFORMATION

DISSIPATION DERATING CURVE

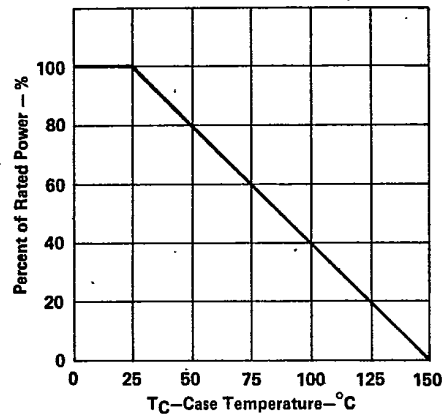


FIGURE 11

TIPL Devices

6