




| MODEL       | OUTPUT 1 |      | OUTPUT 2 |       | OUTPUT 3 |       | Ripple & Noise (mVp-p) |
|-------------|----------|------|----------|-------|----------|-------|------------------------|
| KLT15F-0522 | +5V      | 2.0A | +12V     | 0.5A  | -12V     | 0.5A  | 150mVp-p               |
| KLT15F-0533 | +5V      | 2.0A | +15V     | 0.45A | -15V     | 0.45A | 150mVp-p               |

MAX POWER NOT TO EXCEED 15WATTS

# KLT15F

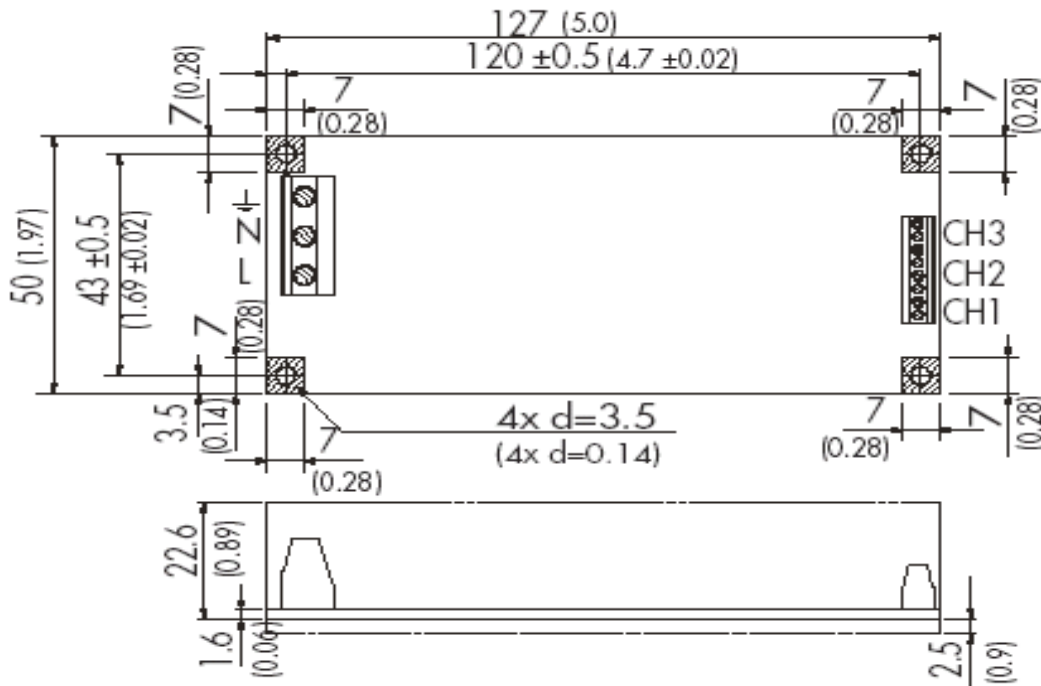

Note:

- **Phoenix connector shown. JST and Molex connectors available.**
- Measurements in millimeter (mm) unless otherwise specified
- Tolerance  $\pm 1\text{mm}$

**NOTE:**

All specifications typical and nominal / full load and 25°C unless otherwise noted.  
 Avoid sustained operation in overload or dead short conditions.  
 Specifications subject to changes without notice.