


REVISION	DESCRIPTION	DATE	DRAFTER
A0	FIRST RELEASE	20.08.06	MARK

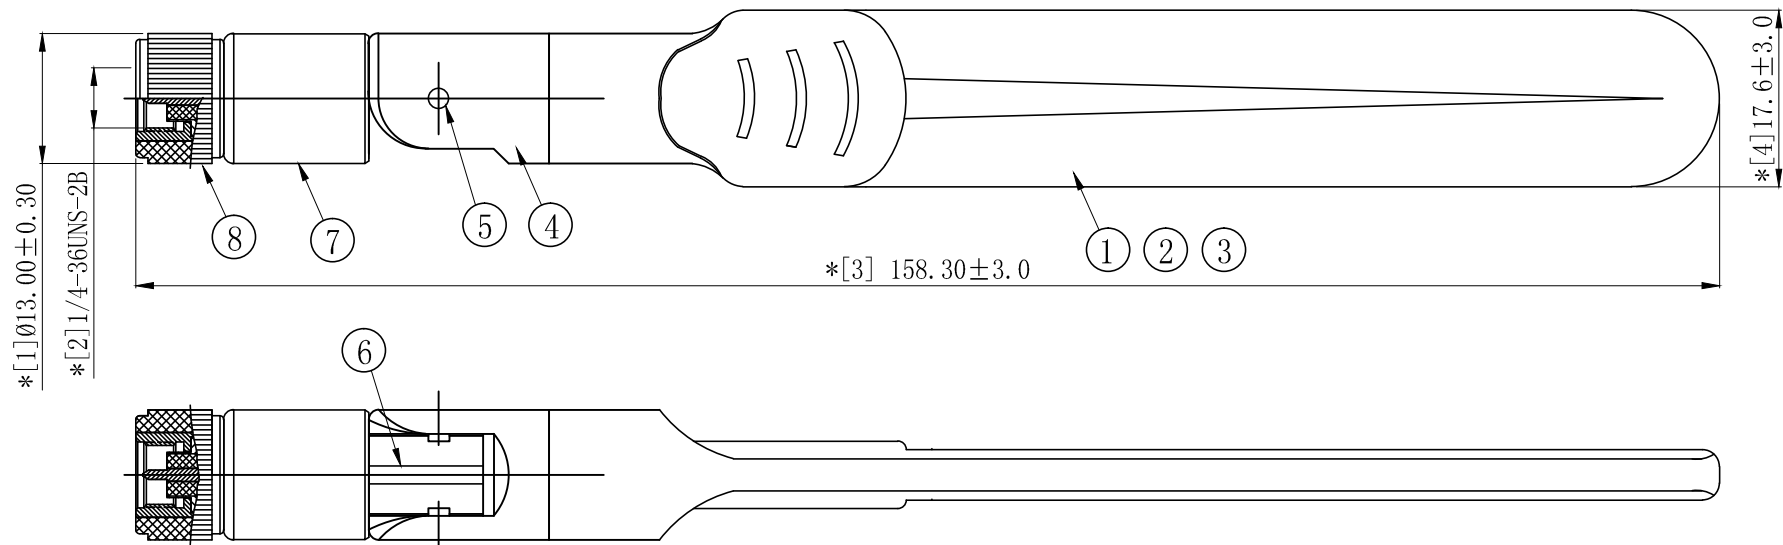

技术要求:

- 特性阻抗: 50Ω;
- 适用频率范围:
 - 2. 4GHz-2.5GHz, VSWR 2.0 max;
 - 5. 15GHz-5.85GHz, VSWR 2.5 max.

3. 尺寸检验:

[*]为FAI检测项目; *为重点检测项目; ■为CPK管制项目。

4 外观检验: 目视全检。

产品表面不得有刮伤、破损、脏污、异色与色差。

5 包装规范: 50PCS/袋。

6 环保要求:

产品及其使用之物料皆需要符合RoHS要求。

8	Connector	SMA Staight plug	1
7	Antenna Base	PC, Color:Black	1
6	Cable	RG-178 Cable,	1
5	Rivet	POM, Color:Black	2
4	Antenna Base	PC, Color:Black	1
3	PCB ANTENNA	PCB FR-4	1
2	AntennaHousing (R)	PC+ABS, Color:Black	1
1	AntennaHousing (L)	PC+ABS, Color:Black	1
NO	PART NAME	DESCRIPTION	Q. TY

GENERAL TOLERANCE:
LINEAR:

X	±5.0
X.X	±0.50
X.XX	±0.20
X.XXX	±0.01
ANGLE:	
X°	±4.00°
X.X°	±3.00°
X.XX°	±2.00°
X.XXX°	±1.00°

HJ-Tech 东莞市皇捷通讯科技有限公司	
FILE NAME: 产品图	TITLE: 公针剑型双频天线(黑色), SMA公头公针 (POM 外壳)
ENG/DATE: Mark/20.08.06	P/N: HJ-LTE-SMA-3D2701BK07-007
APP/DATE:	UNIT: mm
SCALE: 1:1	REVISION: A0
SHEET: 1/1	

COMPLIANCE WITH THE REQUIREMENT: ■RoHS; □ HF; □ SONY SS-00259; □ OTHERS
*NO USING ESTRICTED AND BANNED SUBSTANCE

H253