


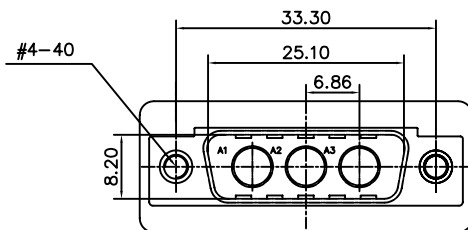
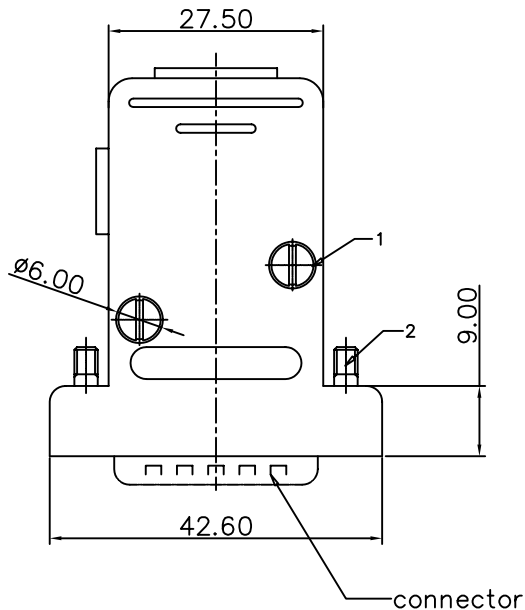


This document is the property of Amphenol Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior consent, & that no right is granted to disclose or to use any information in this document.

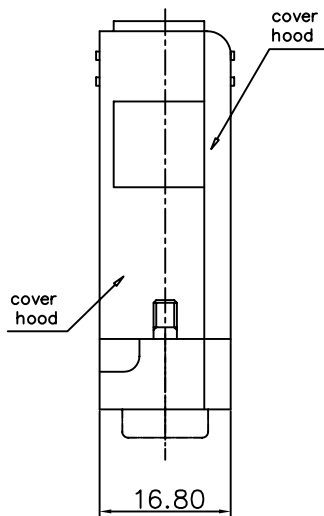

REVISIONS				
SYM	ECN	DESCRIPTION	DATE	APPROVED
A			06/25/07	

D-SUB TECHNICAL DATA

Hood, plastic, For15 positions D-SUB connectors

SHELL : Steel 2.5um(100u") min tin over 1.25um(50u") min nickel

BODY : Glass filled thermoplastic.

Flame retardant to UL94 V-0

COLOUR: Black

CLIMATIC : Temperature range -30 °C up to 90°C

MARKING : Amphenol...(Series No.)

Commercial reference

Manufacturing date

L 17158806 is only hood, the connector is only for reference

PRODUCT CODE



UNLESS OTHERWISE SPECIFIED TOLERANCES		APPROVAL	DATE	Amphenol	
U.S.	METRIC	DRAWN	06/25/07	TITLE	
.X +/-	0.50	CHECKED	06/25/07		
.XX +/-	0.30	CHECKED	06/25/07		
.XXX +/-	0.20	DRAWING FILE :		hood	
FRACTIONS +/-	2'	ANGLE OF PROJECTION		SIZE	
ANGLES +/-		FOR MATERIALS AND FINISHES		DRAWING NO.	
REMOVE SHARP EDGES		DIMENSIONS		A4	
U.S.		INCHES		C L17158806	
METRIC		MM		SCALE	
				NONE	
				SHEET 1 OF 1	
				REV. A	