

Data Sheet

ST041xxDDNN

Page 1/5


P/N

AST041xx

xx=number of poles

2017/05/05

Illustration

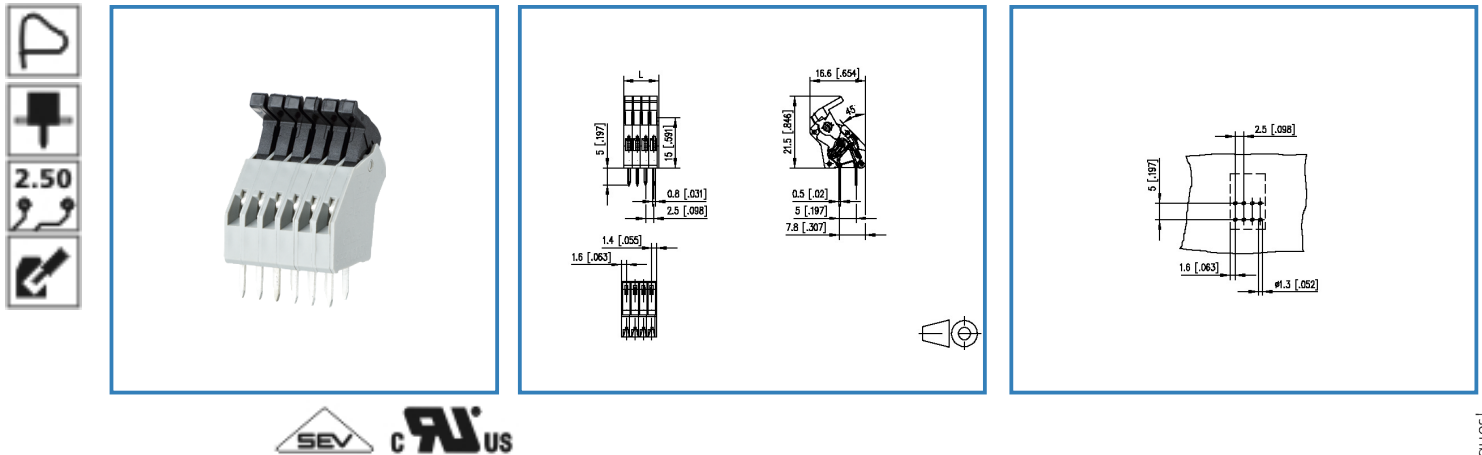

see enlarged drawing at the end of the document

Product specification

- spring clamp terminal block, solderable, double solder pins
- centerline 2.50 mm, direction of connection 45°
- color gray
- eccentric lever

© 2017 METZ CONNECT - Technische Änderungen vorbehalten! Subject to modifications! Sous réserve de modifications techniques!



Data Sheet

ST041xxDDNN

Technical Data

General Data

Solder pin length	5 mm		
min. number of poles	2		
max. number of poles	24		
Insulating material class	CTI 600		
clearance/creepage dist.	1.7 mm		
protection category	IP 20		
Overvoltage category	III	III	II
Pollution degree	3	2	2
Rated voltage	10.0 V	200.0 V	200.0 V
Rated test voltage	1.5 kV	1.5 kV	1.5 kV
Min. insul. strip length	6 mm		

Connection data

Rated wiring solid wire	0.2 - 0.5 mm ² / AWG 28 - 18
Rated wiring stranded wire	0.2 - 0.5 mm ² / AWG 28 - 18

Approvals

 V / A / AWG	150 / 8 / 28 - 18
 0.5 mm ²	130 V / 6 A / T60

Material

insulating material	PA66
flammability class	V0
spring material	Spring steel
contact material	CuZn
Glow-Wire Flammability GWFI	960
Glow-Wire Flammability GWIT	775
contact surface	Ni + Sn

Climatic properties

upper limit temperature	105 °C
-------------------------	--------



Data Sheet

ST041xxDDNN

Page 3/5

P/N

AST041xx

xx=number of poles

2017/05/05

lower limit temperature -40 °C

General

solderability	Acc. to JEDEC JESD22-B102E 245°C/5s
Tolerance	ISO 2768 -mH



Data Sheet

ST041xxDDNN

Page 4/5

P/N


AST041xx

xx=number of poles

2017/05/05

Illustration

Drawing

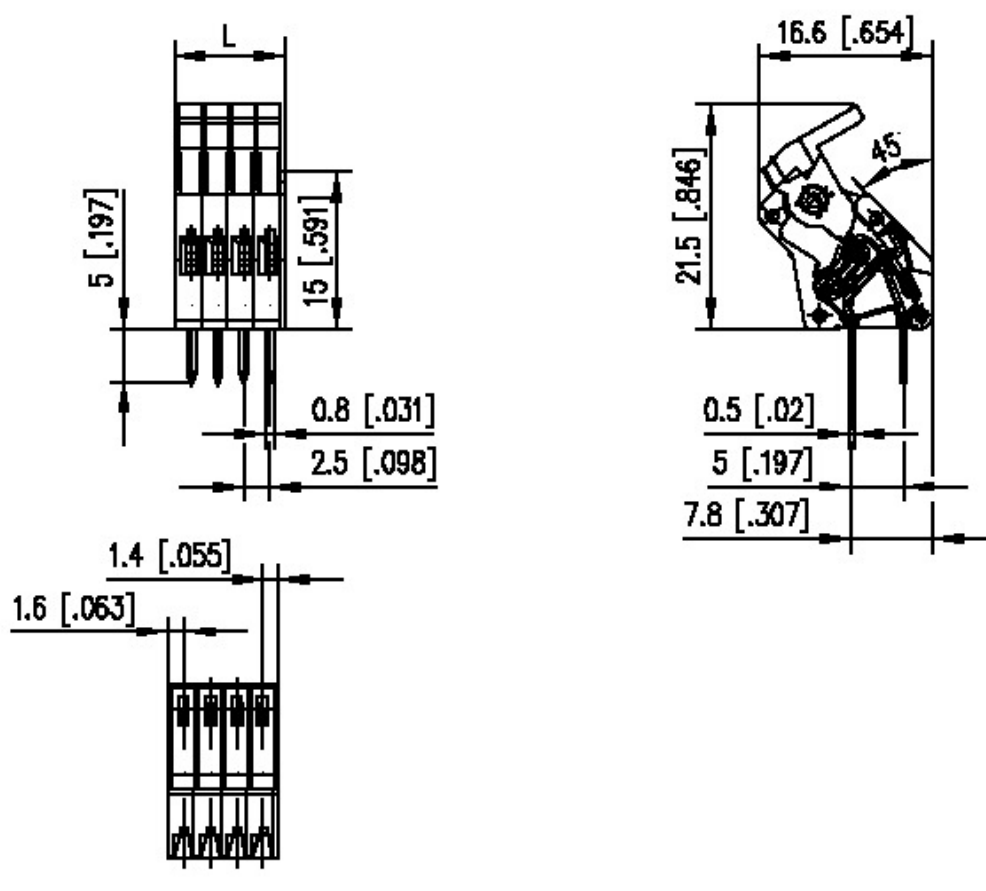

$L = (\text{pole size} - 1) \times \text{centerline} + 3 [0.118]$



Data Sheet

ST041xxDDNN

Page 5/5


P/N

AST041xx

xx=number of poles

2017/05/05

PCB Layout

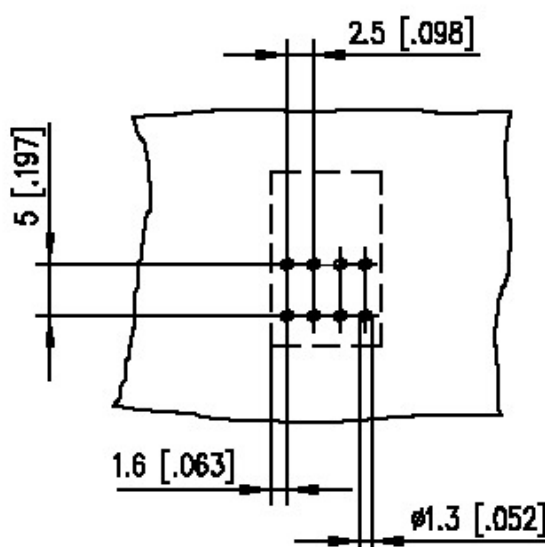

© 2017 METZ CONNECT - Technische Änderungen vorbehalten! Subject to modifications! Sous réserve de modifications techniques!

