

## HC-D 7-TFL-49/M1PG11S/PA

Order No.: 1772256

The illustration shows the version, PA sleeve housing with straight cable exit

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1772256>

Sleeve housing, for single locking latch, height h 49 mm, with screw connection, 1x Pg11, lateral cable entry, material PA

### Commercial data

|                          |                    |
|--------------------------|--------------------|
| EAN                      | 4017918036928      |
| Pack                     | 10 pcs.            |
| Customs tariff           | 85472000           |
| Weight/Piece             | 0.02666 KG         |
| Catalog page information | Page 508 (PC-2009) |

### Product notes

WEEE/RoHS-compliant since:  
02/27/2006

<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

### Technical data

#### General data

|      |                                                   |
|------|---------------------------------------------------|
| Note | For contact inserts HC-D7, D8, A3, A4, B5, HS2-D7 |
|------|---------------------------------------------------|

|                                 |                                |
|---------------------------------|--------------------------------|
| Design                          | D7                             |
| Height                          | 48 mm                          |
| Width                           | 28 mm                          |
| Length                          | 26.5 mm                        |
| Housing type                    | Sleeve housings                |
| Locking type                    | for single locking latch       |
| Type of the screw connection    | 1x Pg11                        |
| Pg screw connection             | With                           |
| Wrench size, union nut          | 18 mm                          |
| Cable exit                      | Lateral                        |
| External cable diameter         | 7.5 mm ... 12.5 mm             |
| Degree of protection            | IP54 / IP65 with sealing screw |
| Ambient temperature (operation) | -40 °C ... 125 °C              |
| Housing material                | PA                             |
| Housing surface material        | PA, light gray                 |
| Cable gland material            | PA                             |
| Cable seal material             | NBR                            |
| Locking latch material          | PA                             |

#### Certificates / Approvals




Certification GOST

#### Accessories

| Item            | Designation    | Description                        |
|-----------------|----------------|------------------------------------|
| <b>Assembly</b> |                |                                    |
| 1686229         | HC-D 7-DS-IP65 | Sealing screw, for IP65 protection |

## Diagrams/Drawings

Dimensioned drawing

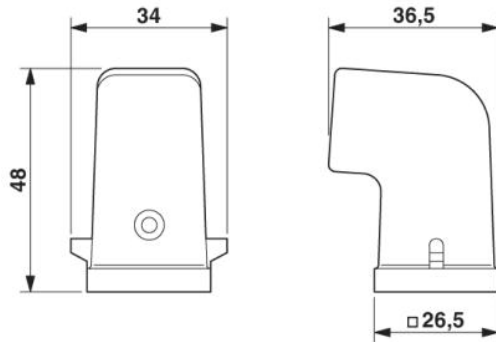

**Address**

PHOENIX CONTACT Inc., USA  
586 Fulling Mill Road  
Middletown, PA 17057, USA  
Phone (800) 888-7388  
Fax (717) 944-1625  
<http://www.phoenixcon.com>



© 2010 Phoenix Contact  
Technical modifications reserved;