


1. Mechanical Dimensions:

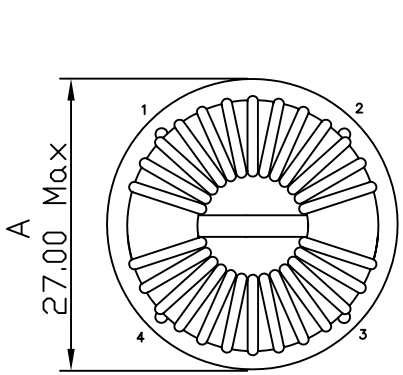


(TOP VIEW)

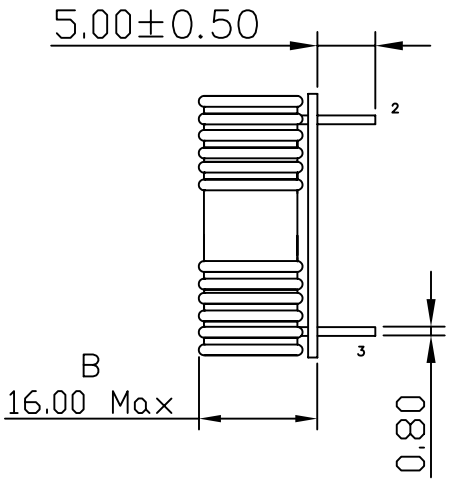

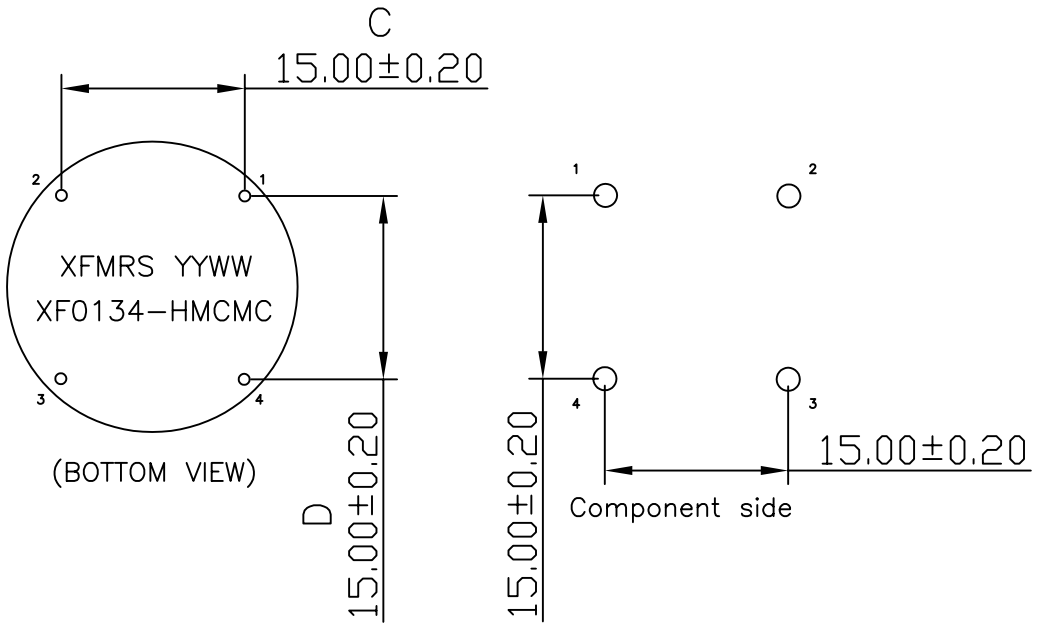

(BOTTOM VIEW)

2. Schematic:

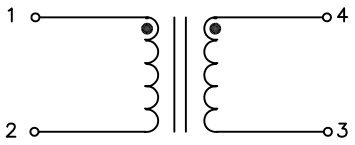

3. Electrical Specifications: @25°C

OCL: 1.30mH Min @10KHz 0.1V Each Wdg

Q: 5 Min @10KHz 0.1V Each Wdg

I rms Amperes: 4.0A Max

DCR: 0.032 Ohms Max, Each Wdg

HIPOT: 500Vac, Wdg to Wdg


Notes:

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. Electrical and mechanical specifications 100% tested
9. RoHS Compliant Component

DOC. REV: A/5

PROPRIETARY Document is the property of XFMRS Group & is not allowed to be duplicated without authorization.

XFMRS Inc. www.XFMRS.com	Title: Common Mode Inductors (Through-Hole)		
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xx ±0.25 Dimensions in MM	P/N:XF0134-HMCMC		REV. A
	DWN.	Feng	Jun-07-11
	CHK.	YK Liao	Jun-07-11
SHEET 1 OF 2	APP.	BW	Jun-07-11

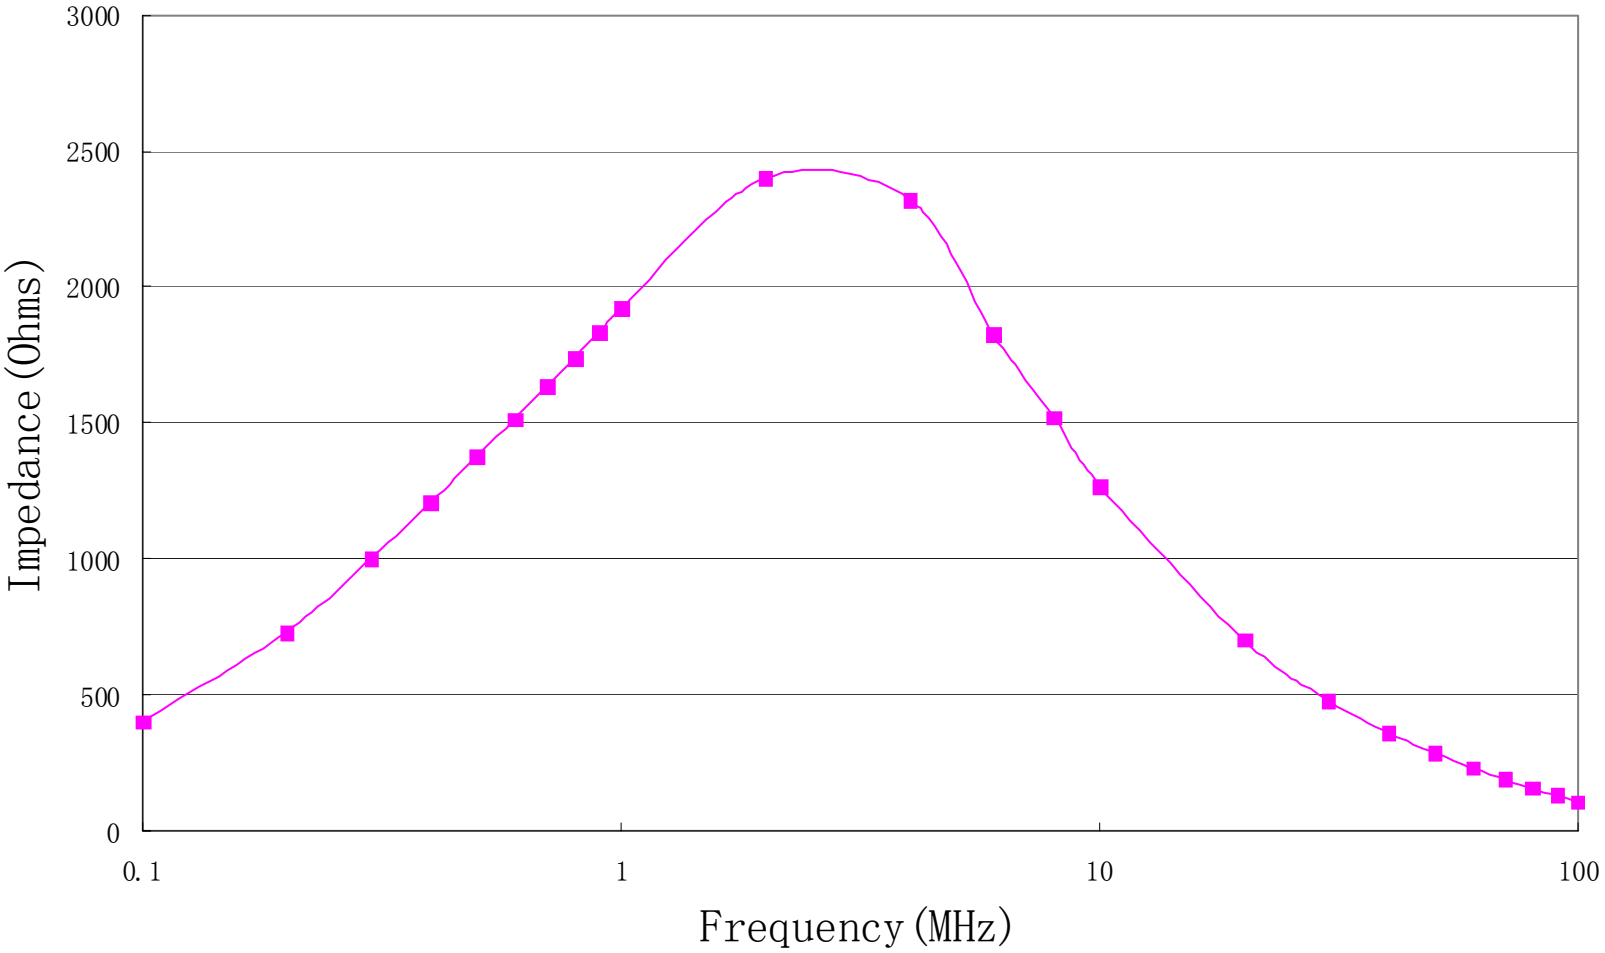

DOC. REV: A/5

XFMRS Inc. www.XFMRS.com	Title: Common Mode Inductors (Through-Hole)		
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xx ±0.25 Dimensions in MM	P/N:XF0134-HMCMC		REV. A
	DWN.	Feng	Jun-07-11
	CHK.	YK Liao	Jun-07-11
SHEET 2 OF 2	APP.	BW	Jun-07-11

PROPRIETARY Document is the property of XFMRS Group & is not allowed to be duplicated without authorization.