
ShenZhen HuaXinAn Electronics Co.,Ltd (Ø6x8mm)


3-Electrode Gas Discharge Tubes 10KA

Fast Delivery Time

RoHS

1：Dimension(mm)

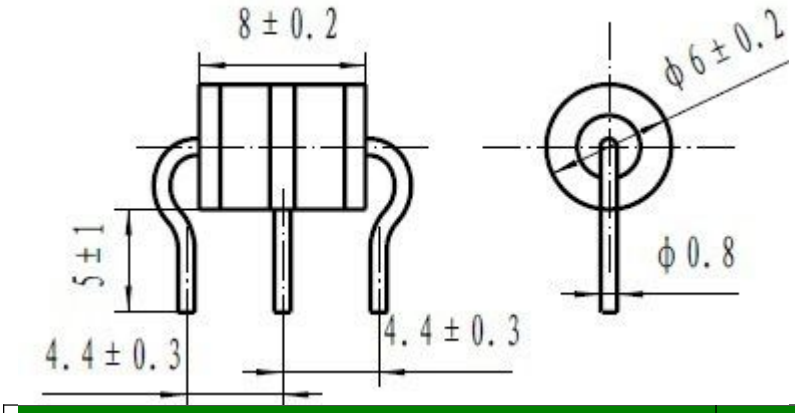

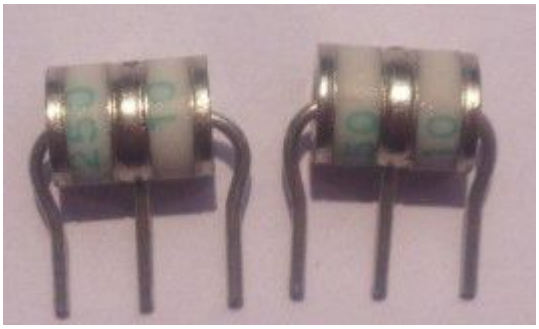

3R250B Photo

2:Main Applications

- PCI Cards protection
- Telephone/Fax/Modem protection
- single line protection
- ADSL/XDSL Splitter,Power Supply
- Surge Protection Device/Surge Protector

3:Features

- 100% Lead-Free(RoHs Compliant)
- Non-Radioactive
- Low capacitance (≤1pF)
- Fast Response-time,High Insulation Resistance.
- Small size :**Ø6x8**(mm)

4 Electrical Characteristics

Part Number	DC Spark-over Voltage @ 100V/S	Impulse Spark-over Voltage @100V/μs	Impulse Spark-over Voltage @1KV/μs	Insulation Resistance	Impulse discharge current(8/20μs)		AC discharge current (50Hz,1s,10times)	Capacitance (1MHz)
	V	V	V	GΩ	10 Times	1 Time	A	PF
3R75B	75±20%	<500	<600	>1	10KA	12KA	10	≤1
3R90B	90±20%	<500	<600	>1	10KA	12KA	10	≤1
3R150B	150±20%	<500	<600	>1	10KA	12KA	10	≤1
3R230B	230±20%	<600	<700	>1	10KA	12KA	10	≤1
3R250B	250±20%	<600	<700	>1	10KA	12KA	10	≤1
3R300B	300±20%	<800	≤ 900	>1	10KA	12KA	10	≤1
3R350B	350±20%	<900	≤ 1000	>1	10KA	12KA	10	≤1
3R400B	400±20%	<900	≤ 1000	>1	10KA	12KA	10	≤1
3R420B	420±20%	<900	≤ 1000	>1	10KA	12KA	10	≤1
3R470B	470±20%	<1100	≤ 1200	>1	10KA	12KA	10	≤1
3R500B	500±20%	<1100	≤ 1200	>1	10KA	12KA	10	≤1
3R600B	600±20%	<1200	≤ 1300	>1	10KA	12KA	10	≤1
3R800B	800±20%	<1300	≤ 1400	>1	10KA	12KA	10	≤1

Packing Quantity : 100PCS

Shen Zhen HuaXinAn Electronics Co.,Ltd sales@huaandz.com abc0734@126.com