66327 7.5 kV HIGH VOLTAGE, 4N55 TYPE HIGH SPEED ISOLATOR

OPTOELECTRONIC PRODUCTS DIVISION

09/18/2009

Features:

- TTL and CMOS compatible
- 7.5 kVdc Isolation
- 2 MHz Bandwidth typical
- Integral Detector Die Faraday Shield for improved Common Mode Rejection

Applications:

- High Voltage Isolation
- Voltage Level Shifting
- Isolated Receiver Input
- Switching power supplies
- Medical systems

DESCRIPTION

The ***66327*** high voltage isolator consists of an 850 nm LED optically coupled to a photodiode driven detector. The isolator provides high isolation and fast switching speeds over the specified temperature range of -40ºC to +100ºC.The isolator is built with hermetic components internally optically coupled and encased in a high temperature outer PPS plastic housing.

ABSOLUTE MAXIMUM RATINGS (T_A=25°C unless otherwise specified)

Isolation Voltage (Input to Output) (Note 2) ..... 7.5 kVdc
Operating Free-Air Temperature Range ..... -40°C to +100°C
Storage Temperature ..... -40°C to +100°C
Lead Solder Temperature (10 second, 1.6 mm from case) (Note 1) ..... 260°C


LED:

Peak Forward Input Current (2 μs duration) ..... 300 mA
Average Forward Input Current ..... 20 mA
Reverse Input Voltage ..... 3.0 V
Input Power Dissipation ..... 40 mW

Output IC:


Supply voltage - V_{CC} ..... 20 V
Output Current - I_O ..... 20 mA
Output Power Dissipation ..... 50 mW
Output Voltage - V_O ..... 20 V

Package Dimensions

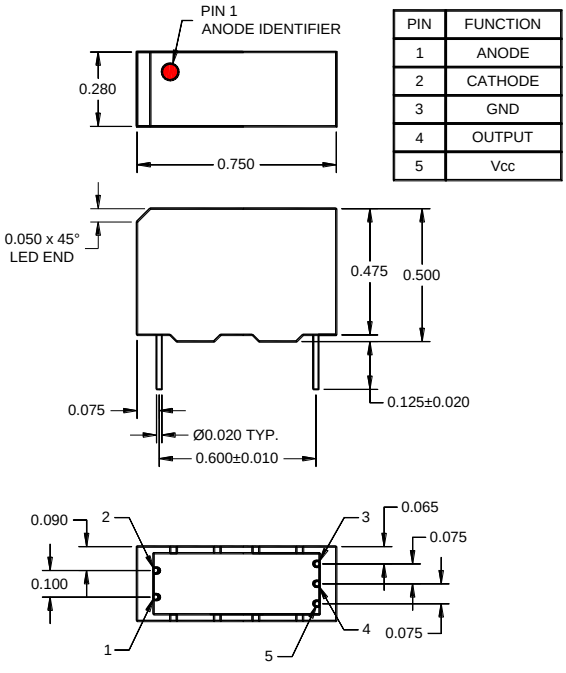

PIN	FUNCTION
1	ANODE
2	CATHODE
3	GND
4	OUTPUT
5	Vcc

Schematic Diagram

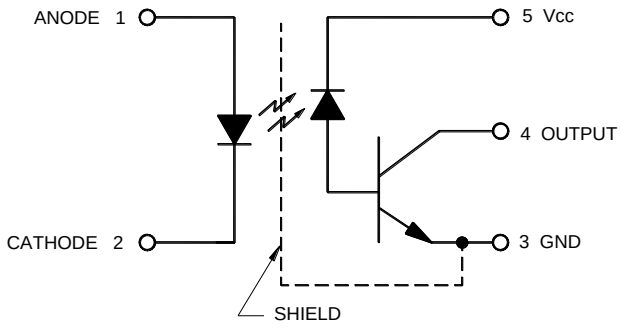

ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED

MICROPAC INDUSTRIES, INC. OPTOELECTRONIC PRODUCTS DIVISION • 725 E. Walnut Street, Garland, TX 75040 • (972) 272-3571 • Fax (972) 487-6918
www.micropac.com E-MAIL: OPTOSALES @ MICROPAC.COM

ELECTRICAL CHARACTERISTICS (T_A = -40°C to +100°C unless otherwise specified)

PARAMETER	SYMBOL	MIN	TYP	MAX	UNITS	TEST CONDITIONS	NOTE
Input LED							
Input Forward Voltage	V_F		1.3	1.8	V	I_F = 20 mA	
Reverse Current	I_R			100	µA	V_R = 3.0 V	
Output IC							
Current Transfer Ratio	CTR	9	20		%	I_F = 16 mA, V_O = 0.4 V, V_{CC} = 4.5 V	3
Output Leakage Current	I_{OH1}		70	250	µA	I_F = 250 µA, V_{CC} = V_O= 18 V	
Logic High Output Current	I_{OH}		20	100	µA	I_F = 0, V_{CC} = V_O= 18 V	
High Level Supply Current	I_{CCH}		0.02	10	µA	I_F = 0 mA, V_{CC} = 18 V	
Low Level Supply Current	I_{CCL}		35	200	µA	I_F = 20 mA, V_{CC} = 18 V	
Input – Output Isolation Voltage	V_{I-O}	7500			V	I_{I-O} = 25 µA	2
Propagation Delay Time To High Output Level	t_{PLH}		2	6	µs	I_F = 16 mA , V_{CC} = 5.0 V, R_L = 8.2 kΩ C_L = 50 pF	
Propagation Delay Time To Low Output Level	t_{PHL}		0.4	2	µs	I_F = 0.5 mA , V_{CC} = 5.0 V, R_L = 4.7 kΩ C_L = 50 pF	
Typical Characteristics (V_{CC} = 5 V, T_A = 25°C)							
Input Capacitance	C_{IN}		120		pF	V_F = 0, f = 1 MHz	
Coupling Capacitance (Input – Output)	$C_{I—O}$		1.5		pF	V_F = 0, f = 1 MHz	2
Common Mode Transient Immunity At High Output Level	CM_H	500	1000		V/µs	V_{CM} = 10 Vp-p, R_L = 8.2 kΩ, I_F = 0	4, 6
Common Mode Transient Immunity At Low Output Level	CM_L	500	1000		V/µs	V_{CM} = 10 Vp-p, R_L = 8.2 kΩ, I_F = 16 mA	5, 6

NOTES:

1) The duration can be extended to 10 seconds maximum when flow soldering. Otherwise 5 seconds with soldering iron.
2) Device considered a two terminal device with all Input pins (Anode and Cathode) shorted together and all Output pins (V_{CC}, GND and Output) shorted together.
3) CURRENT TRANSFER RATIO is defined as the ratio of output collector current, I_O, to the forward LED input current, I_F, times 100%.
4) CM_H is the maximum tolerable common mode transient to assure the output will remain in a HIGH logic state (ie. V_O > 2.0 V).
5) CM_L is the maximum tolerable common mode transient to assure the output will remain in a LOW logic state (ie. V_O < 0.8V).
6) In applications where dv/dt may exceed 50,000 V/µS (such as static discharge) a series resistor, R_{CC}, should be include to protect the detector IC from destructively high surge currents. The recommended value is R_{CC} = 1V/(0.6 * I_F) mA.

SELECTION GUIDE

PART #	PART DESCRIPTION
66327-001	Commercial
66327-101	Screened