


Nut Torque: 5 ~ 14Nm
 Protection Grade: IP65, IK08
 Shell: Brass, Ni Plating
 Base: PBT+15%GF
 Lamp Type: LED
 Forward current : 20mA
 Lamp Life: 50000H
 Beads Color: Green
 Lamp voltage: 3V
 Operating Temperature: -20°C~80°C
 Relative Air Humidity: 45%~85%
 Safety Approval:

CUT-OUT

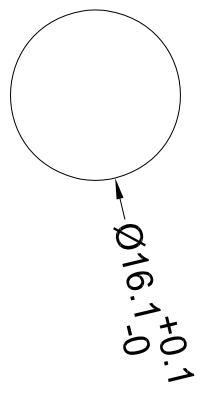

东莞市德松电子有限公司
D-SWITCH ELECTRONICS CO.,LTD

公差 TOLERANCES .X±0.5 .XX±0.3 角度 ANGLE ±1° 单位 DIMENSION UNIT mm.

版本 VER	变更说明 CHANGE DESCRIPTION	日期 DATE	ECON NO.	核准 APPROVED BY	核对 CHECKED BY	绘图 DRAWN BY	品名 TITLE	图号 DRAWING NO
							PBM-16111-FS-G1-R3-B8S-A3	PBM-16111-FS-G1-R3-B8S-A3_A0