STG3699

LOW VOLTAGE 0.5Ω MAX QUAD SPDT SWITCH WITH BREAK BEFORE MAKE FEATURE

- HIGH SPEED:
  t_{PD} = 0.3ns (TYP.) at V_{CC} = 3.0V
  t_{PD} = 0.4ns (TYP.) at V_{CC} = 2.3V
- ULTRA LOW POWER DISSIPATION:
  I_{CC} = 0.2µA (MAX.) at T_A = 85°C
- LOW "ON" RESISTANCE V_{IN}=0V:
  R_{ON} = 0.5Ω (MAX. T_A = 25°C) at V_{CC} = 2.7V
  R_{ON} = 0.8Ω (MAX. T_A = 25°C) at V_{CC} = 2.3V
  R_{ON} = 3.0Ω (MAX. T_A = 25°C) at V_{CC} = 1.8V
- WIDE OPERATING VOLTAGE RANGE:
  V_{CC} (OPR) = 1.65V to 4.3V SINGLE SUPPLY
- 4.3V TOLERANT AND 1.8V COMPATIBLE THRESHOLD ON DIGITAL CONTROL INPUT at V_{CC} = 2.3 to 3.0V
- LATCH-UP PERFORMANCE EXCEEDS 300mA (JESD 17)
- ESD PERFORM. (ANALOG CHAN. vs GND): HBM > 7KV (MIL STD 883 method 3015)

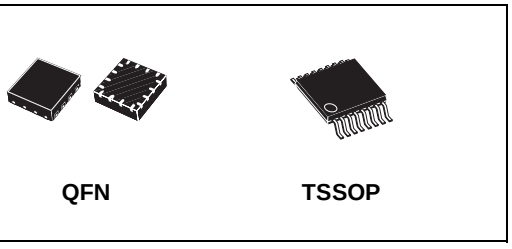


Table 1: Order Codes

PACKAGE	T & R
TSSOP	STG3699TTR
QFN	STG3699QTR

DESCRIPTION

The STG3699 is an high-speed CMOS LOW VOLTAGE QUAD ANALOG S.P.D.T. (Single Pole Dual Throw) SWITCH or 2:1 Multiplexer/ Demultiplexer Switch fabricated in silicon gate C^2MOS technology. It is designed to operate from 1.65V to 4.3V, making this device ideal for portable applications.

It offers very low ON-Resistance (<0.5Ω) at V_{CC}=3.0V. The nIN inputs are provided to control the switches. The switches nS1 are ON (they are connected to common Ports Dn) when the nIN input is held high and OFF (high impedance state exists between the two ports) when nIN is held low; the switches nS2 are ON (they are connected to common Ports Dn) when the nIN input is held low and OFF (high impedance state exists between the two ports) when IN is held high. Additional key features are fast switching speed, Break Before Make Delay Time and Ultra Low Power Consumption. All inputs and outputs are equipped with protection circuits against static discharge, giving them ESD immunity and transient excess voltage. It's available in the commercial temperature range in TSSOP and QFN3x3mm package.

Figure 1: Pin Connection

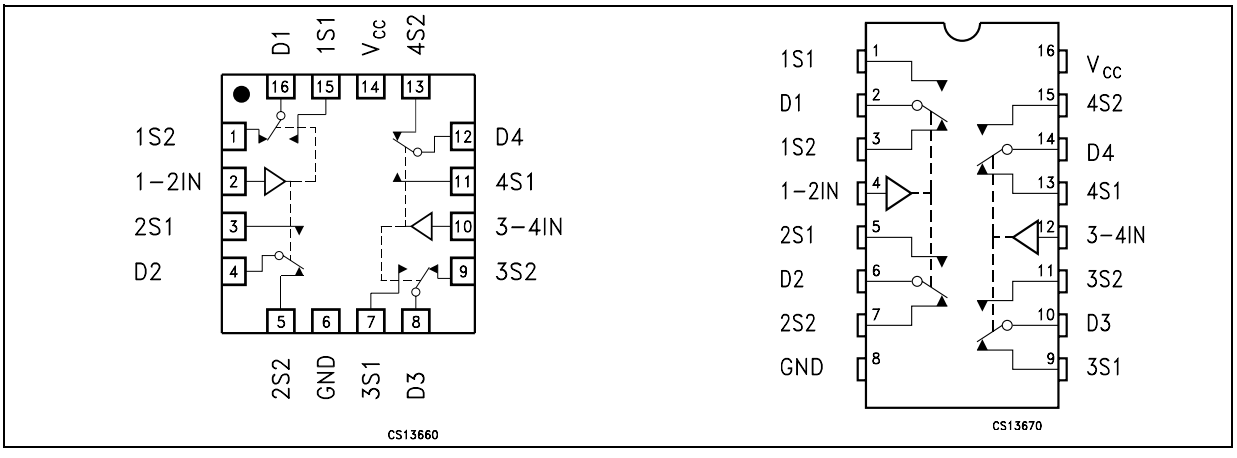


Figure 2: Input Equivalent Circuit

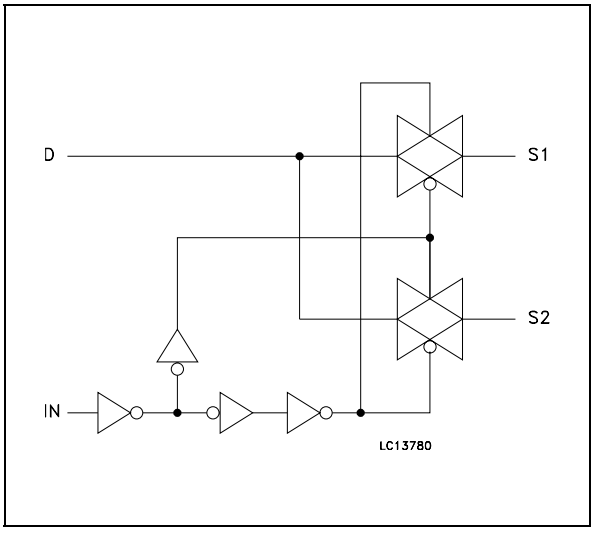


Table 2: Pin Description

TSSOP(1) PIN N°	QFN(1) PIN N°	SYMBOL	NAME AND FUNCTION
1, 5, 9, 13, 3, 7, 11, 15	15, 3, 7, 11, 1, 5, 9, 13	1S1 to 4S1, 1S2 to 4S2	Independent Channels
2, 6, 10, 14	16, 4, 8, 12	D1 to D4	Common Channels
4, 12	2, 10	1-2IN, 3-4IN	Controls
16	14	V_{CC}	Positive Supply Voltage
8	6	GND	Ground (0V)

1. Exposed pad must be soldered to a floating plane. Do NOT connect to power or ground.

Table 3: Truth Table

IN	SWITCH S1	SWITCH S2
H	ON	OFF(1)
L	OFF(1)	ON

1. High Impedance

Table 4: Absolute Maximum Ratings

Symbol	Parameter		Value	Unit
V_{CC}	Supply Voltage		-0.5 to 4.6	V
V_I	DC Input Voltage		-0.5 to V_{CC} + 0.5	V
V_{IC}	DC Control Input Voltage		-0.5 to 4.6	V
V_O	DC Output Voltage		-0.5 to V_{CC} + 0.5	V
I_{IKC}	DC Input Diode Current on control pin (V_{IN}< 0V)		– 50	mA
I_{IK}	DC Input Diode Current (V_{IN}< 0V)		± 50	mA
I_{OK}	DC Output Diode Current		± 20	mA
I_O	DC Output Current		± 300	mA
I_{OP}	DC Output Current Peak (pulse at 1ms, 10% duty cycle)		± 500	mA
I_{CC} or I_{GND}	DC V_{CC} or Ground Current		± 100	mA
P_D	Power Dissipation at T_a=70°C (1)	QFN	1120	mW
		TSSOP	500	mW
T_{stg}	Storage Temperature		-65 to 150	°C
T_L	Lead Temperature (10 sec)		300	°C

Absolute Maximum Ratings are those values beyond which damage to the device may occur. Functional operation under these conditions not implied.

(1) Derate above 70°C: by 18.5mW/°C for QFN package; by 5.6mW/°C for TSSOP.

Table 5: Recommended Operating Conditions

Symbol	Parameter		Value	Unit
V_{CC}	Supply Voltage (note 1)		1.65 to 4.3	V
V_I	Input Voltage		0 to V_{CC}	V
V_{IC}	Control Input Voltage		0 to 4.3	V
V_O	Output Voltage		0 to V_{CC}	V
T_{op}	Operating Temperature		-55 to 125	°C
dt/dv	Input Rise and Fall Time Control Input	V_{CC}= 1.65V to 2.7V	0 to 20	ns/V
		V_{CC}= 3.0V to 4.3V	0 to 10	

1) Truth Table guaranteed: 1.2V to 4.3V.

Table 6: DC Specifications

Symbol	Parameter	Test Conditions		Value							Unit
		V_{CC} (V)		T_A = 25°C			-40 to 85°C		-55 to 125°C		
				Min.	Typ.	Max.	Min.	Max.	Min.	Max.	
V_{IH}	High Level Input Voltage	1.65-1.95		$0.65V_{CC}$			$0.65V_{CC}$		$0.65V_{CC}$		V
		2.3-2.5		1.4			1.4		1.4		
		2.7-3.0		1.4			1.4		1.4		
		3.3		1.5			1.5		1.5		
		3.6		1.7			1.7		1.7		
		4.3		2.2			2.2		2.2		
V_{IL}	Low Level Input Voltage	1.65-1.95				0.40		0.40		0.40	V
		2.3-2.5				0.50		0.50		0.50	
		2.7-3.0				0.50		0.50		0.50	
		3.3				0.50		0.50		0.50	
		3.6				0.50		0.50		0.50	
		4.3				1.3		1.3		1.3	
R_{ON}	Switch ON Resistance (1)	4.3	V_S=0V to V_{CC} I_S=100mA		0.40	0.50		0.60			Ω
		3.0			0.40	0.50		0.60			
		2.7			0.40	0.50		0.60			
		2.3			0.50	0.80		0.80			
		1.8			0.70	3.0		4.0			
		1.65			0.80	3.0		4.0			
ΔR_{ON}	ON Resistance Match between channels (1,2)	2.7	V_S=1.5V I_S=100mA		0.06						Ω
R_{FLAT}	ON Resistance FLATNESS (3)	4.3	V_S=1.5V I_S=100mA								Ω
		3.0									
		2.7			0.07	0.15		0.15			
		2.3									
		1.65	V_S=0.8V I_S=100mA								
I_{OFF}	OFF State Leakage Current (nSn), (Dn)	4.3	V_S=0.3 or 4V			±10		± 100			nA
I_{IN}	Input Leakage Current	0 - 4.3	V_{IN}= 0 to 4.3V			±0.1		± 1			µA
I_{CC}	Quiescent Supply Current (1)	1.65-4.3	V_{IN}=V_{CC} or GND			±0.05		±0.2		±1	µA

Note 1: Guaranteed by design
Note 2: $\Delta R_{ON} = R_{ON(MAX)} - R_{ON(MIN)}$.
Note 3: Flatness is defined as the difference between the maximum and minimum value of on-resistance as measured over the specified analog signal ranges.

Table 7: AC Electrical Characteristics (C_L = 35pF, R_L = 50Ω, $t_r = t_f \leq$ 5ns)

Symbol	Parameter	Test Condition		Value							Unit
		V_{CC} (V)		T_A = 25°C			-40 to 85°C		-55 to 125°C		
				Min.	Typ.	Max.	Min.	Max.	Min.	Max.	
t_{PLH}, t_{PHL}	Propagation Delay	1.65-1.95	V_I=OPEN		0.45						ns
		2.3-2.7			0.40						
		3.0-3.6			0.30						
		3.6-4.3			0.30						
t_{ON}	TURN-ON time	1.65-1.95	V_S=0.8V		70						ns
		2.3-2.7	V_S=1.5V		30	50		60			
		3.0-3.6			30	50		60			
		3.6-4.3			30	50		60			
t_{OFF}	TURN-OFF time	1.65-1.95	V_S=0.8V		45						ns
		2.3-2.7	V_S=1.5V		25	30		40			
		3.0-3.6			25	30		40			
		3.6-4.3			25	30		40			
t_D	Break Before Make Time Delay	1.65-1.95	C_L=35pF, R_L= 50Ω, V_S=1.5V								ns
		2.3-2.7		2	15						
		3.0-3.6		2	15						
		3.6-4.3		2	15						
Q	Charge injection	1.65-1.95	C_L= 100pF, R_L= 1MΩ, V_{GEN}= 0V, R_{GEN}= 0Ω		50						pC
		2.3-2.7			40						
		3.0-3.6			35						
		3.6-4.3			35						

Table 8: Analog Switch Characteristics (C_L = 5pF, R_L = 50Ω, T_A = 25°C)

Symbol	Parameter	Test Condition		Value							Unit
		V_{CC} (V)		T_A = 25°C			-40 to 85°C		-55 to 125°C		
				Min.	Typ.	Max.	Min.	Max.	Min.	Max.	
OIRR	Off Isolation (1)	1.65-4.3	V_S= 1V_{RMS} f= 100KHz		-64						dB
Xtalk	Crosstalk	1.65-4.3	V_S= 1V_{RMS} f= 100KHz		-54						dB
THD	Total Harmonic Distortion	2.3-4.3	R_L= 600Ω, V_{IN}= 2V_{PP}, f= 20Hz to 20kHz		0.03						%
BW	-3dB Bandwidth	1.65-4.3	R_L= 50Ω		50						MHz
C_{IN}	Control Pin Input Capacitance				5						pF
C_{Sn}	Sn Port Capacitance	3.3	f= 1MHz		37						
C_D	D Port Capacitance when Switch is Enabled	3.3	f= 1MHz		84						

Note 1: Off Isolation = 20Log_{10} (V_D/V_S), V_D = output. V_S = input to off switch

Figure 3: On Resistance

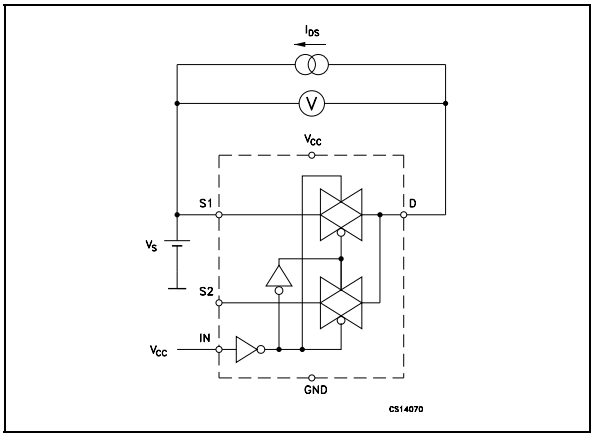


Figure 4: Off Leakage

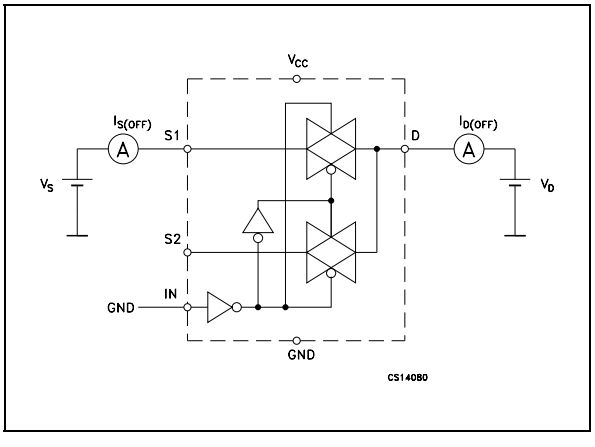


Figure 5: Off Isolation

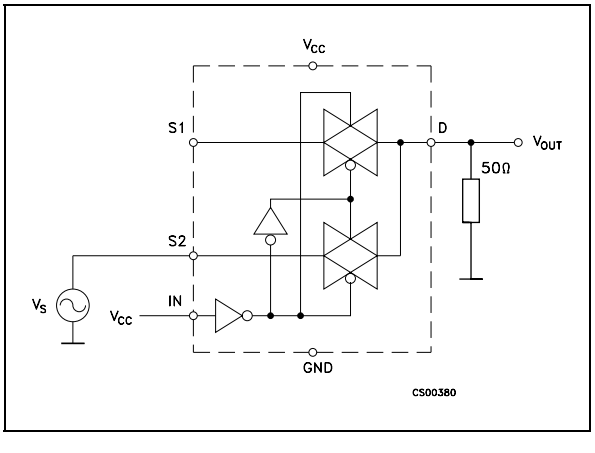


Figure 6: Bandwidth

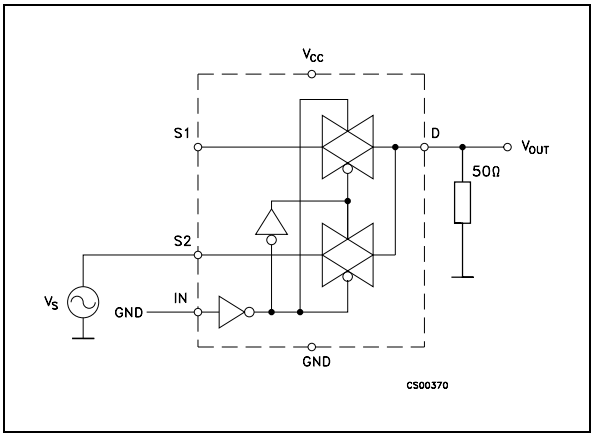


Figure 7: Channel To Channel Crosstalk


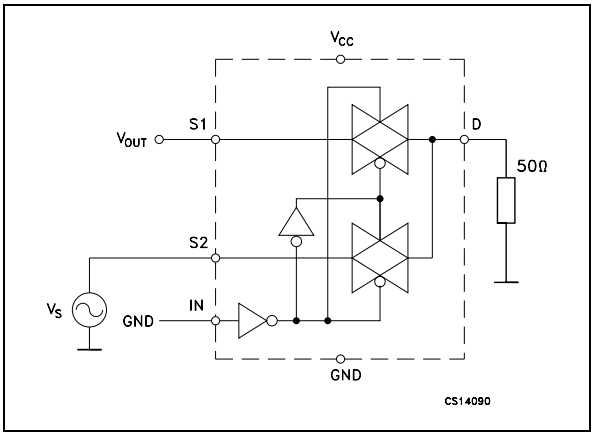


Figure 8: Test Circuit

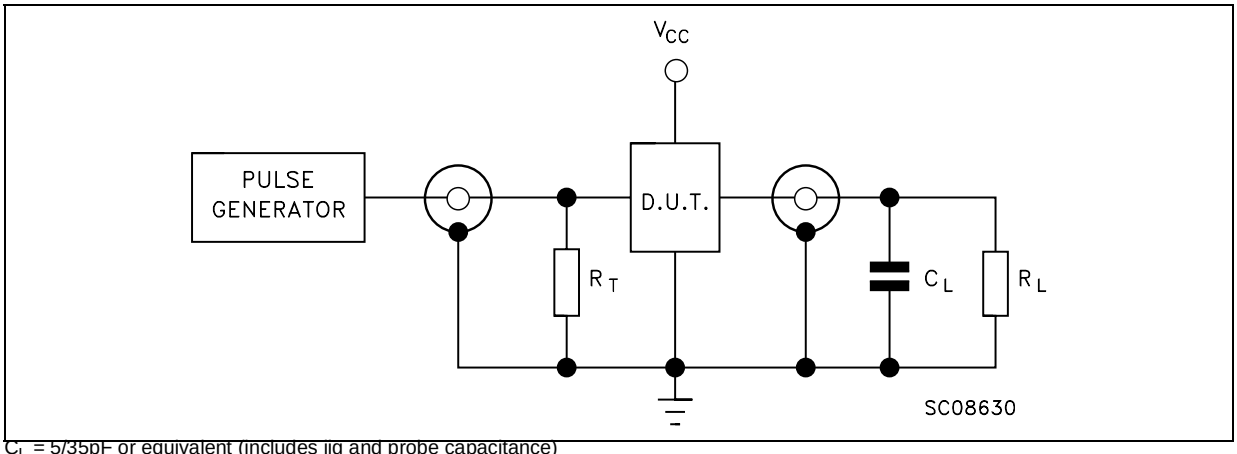

C_L = 5/35pF or equivalent (includes jig and probe capacitance)
R_L = 50Ω or equivalent
R_T = Z_{OUT} of pulse generator (typically 50Ω)

Figure 9: Break Before Make Time Delay

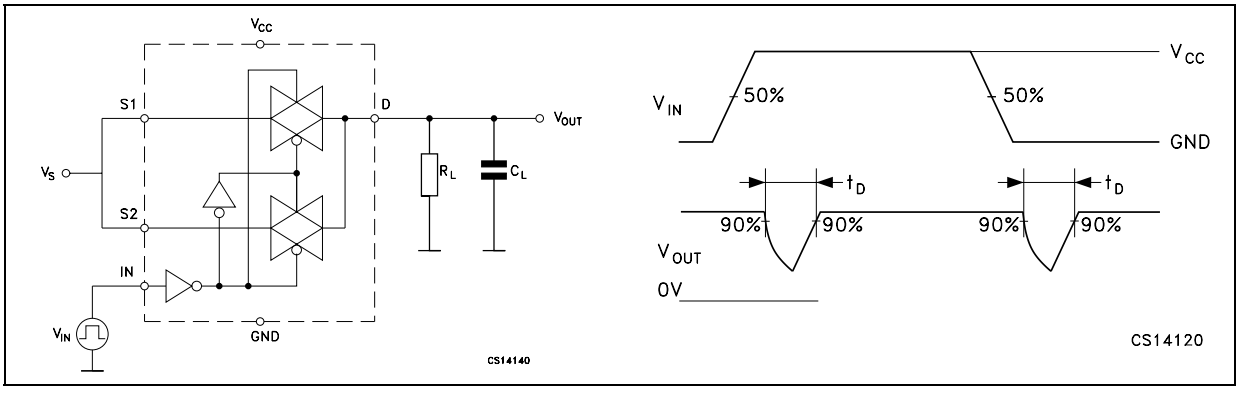


Figure 10: Charge Injection (V_{GEN}=0V, R_{GEN}=0Ω, R_L=1MΩ, C_L=100pF)



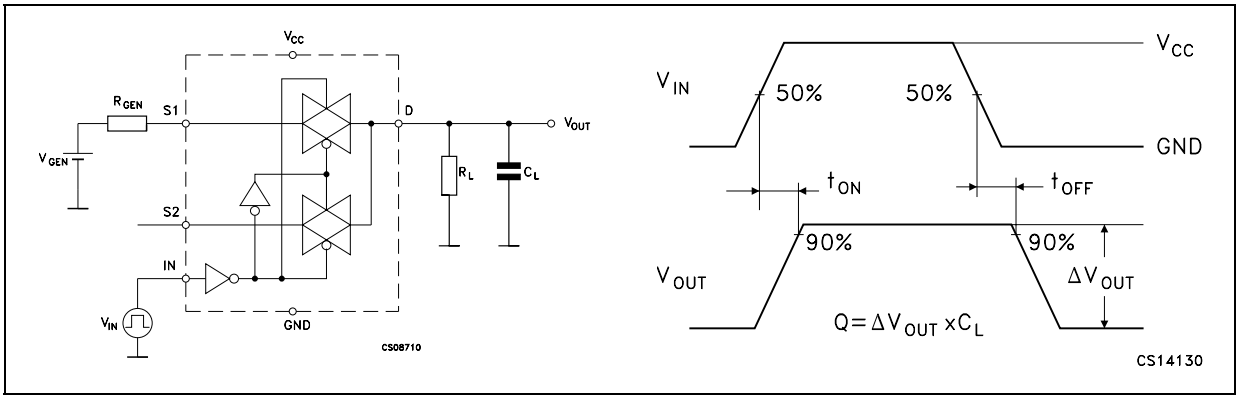



Figure 11: Turn On, Turn Off Delay Time

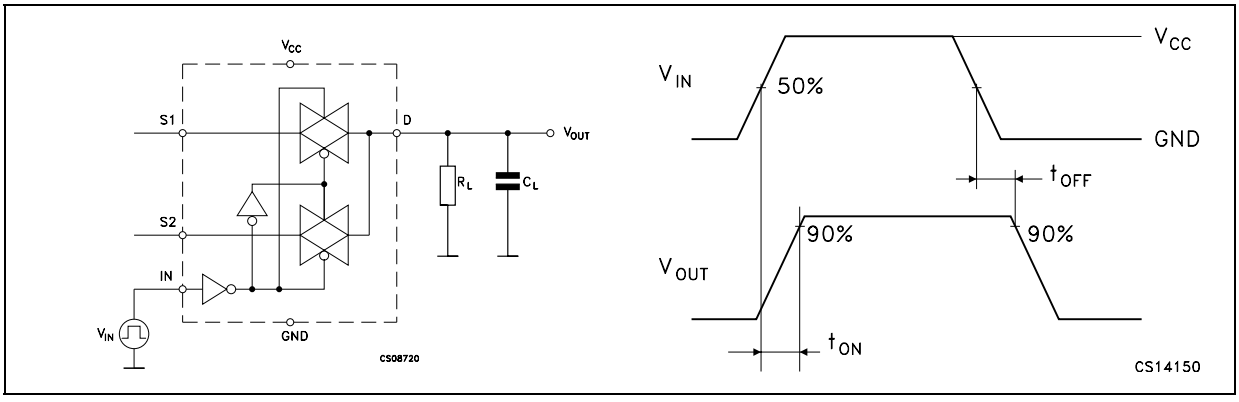


TSSOP16 MECHANICAL DATA

DIM.	mm.			inch		
	MIN.	TYP	MAX.	MIN.	TYP.	MAX.
A			1.2			0.047
A1	0.05		0.15	0.002	0.004	0.006
A2	0.8	1	1.05	0.031	0.039	0.041
b	0.19		0.30	0.007		0.012
c	0.09		0.20	0.004		0.0079
D	4.9	5	5.1	0.193	0.197	0.201
E	6.2	6.4	6.6	0.244	0.252	0.260
E1	4.3	4.4	4.48	0.169	0.173	0.176
e		0.65 BSC			0.0256 BSC	
K	0°		8°	0°		8°
L	0.45	0.60	0.75	0.018	0.024	0.030

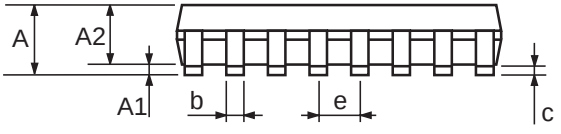

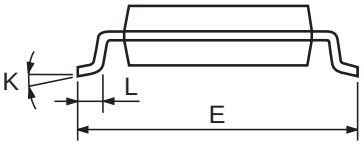


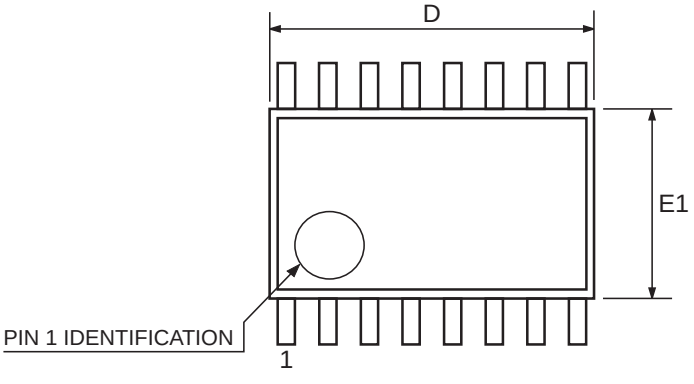

0080338D


QFN16 (3x3) MECHANICAL DATA

DIM.	mm.			inch		
	MIN.	TYP	MAX.	MIN.	TYP.	MAX.
A	0.80	0.90	1.00	0.032	0.035	0.039
A1		0.02	0.05		0.001	0.002
A3		0.20			0.008	
b	0.18	0.25	0.30	0.007	0.010	0.012
D		3.00			0.118	
D2	1.55	1.70	1.80	0.061	0.067	0.071
E		3.00			0.118	
E2	1.55	1.70	1.80	0.061	0.067	0.071
e		0.50			0.020	
K		0.20			0.008	
L	0.30	0.40	0.50	0.012	0.016	0.020
r	0.09			0.006		

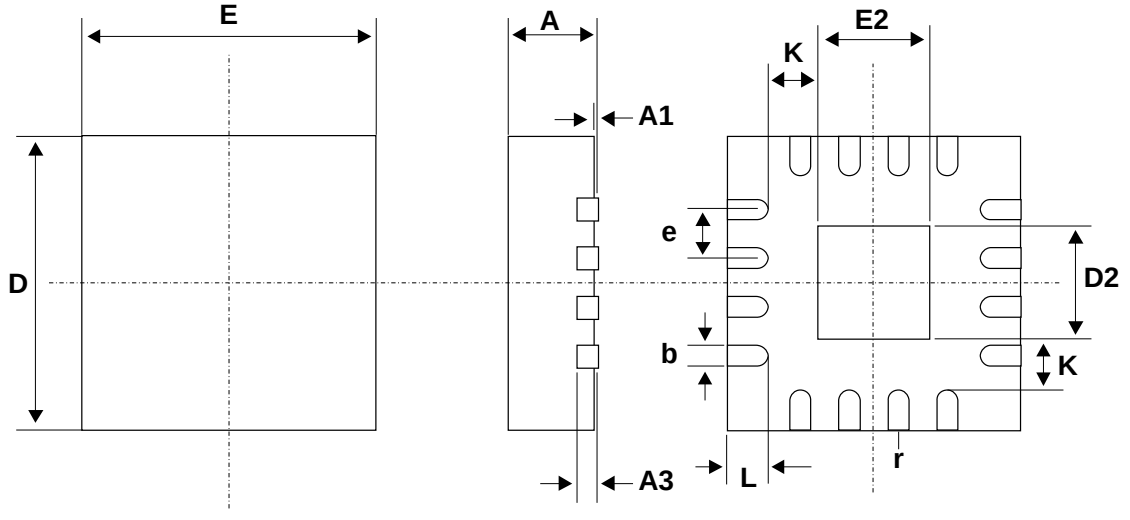

Tape & Reel TSSOP16 MECHANICAL DATA

DIM.	mm.			inch		
	MIN.	TYP	MAX.	MIN.	TYP.	MAX.
A			330			12.992
C	12.8		13.2	0.504		0.519
D	20.2			0.795		
N	60			2.362		
T			22.4			0.882
Ao	6.7		6.9	0.264		0.272
Bo	5.3		5.5	0.209		0.217
Ko	1.6		1.8	0.063		0.071
Po	3.9		4.1	0.153		0.161
P	7.9		8.1	0.311		0.319

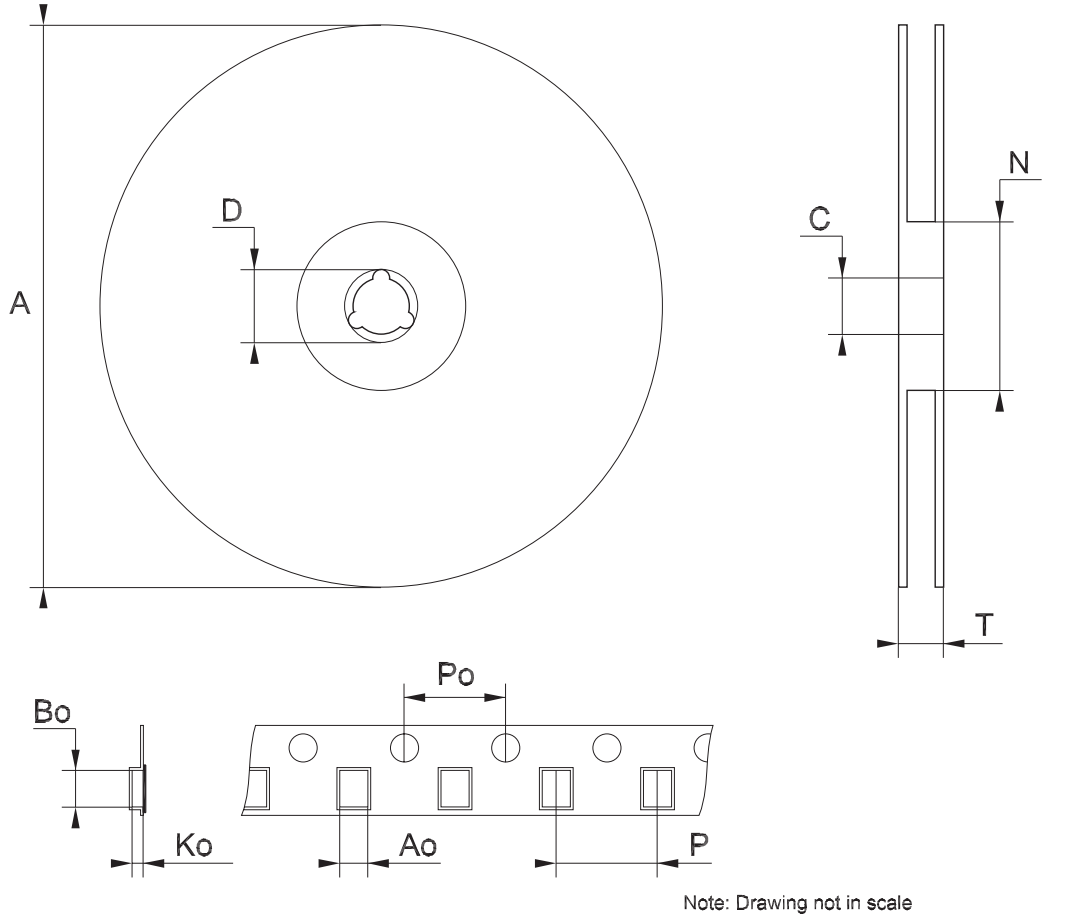

Note: Drawing not in scale

Table 9: Revision History

Date	Revision	Description of Changes
14-May-2004	3	Characteristics at V_{CC} = 4.3 V Added on Tables 3, 4, 5, 6 and 7.
01-Jun-2004	4	ESD Performance (Analog Channels) added on top page.
04-Jul-2005	5	The Q Values on Table 7 has been updated.

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a registered trademark of STMicroelectronics

All other names are the property of their respective owners

© 2005 STMicroelectronics - All Rights Reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

www.st.com