
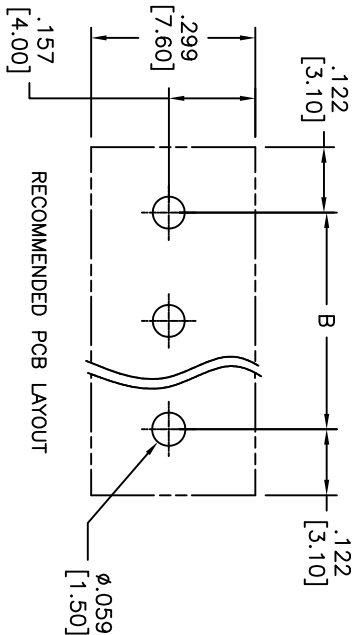
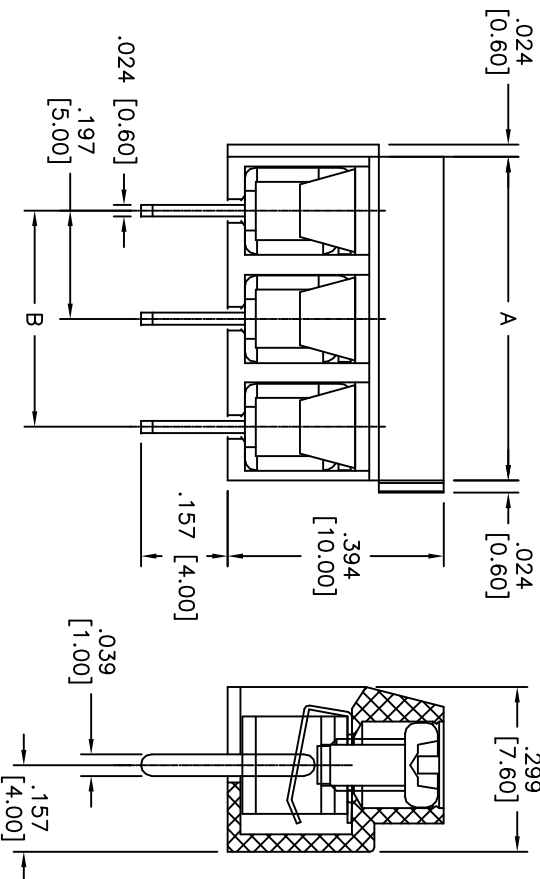


Rev	AWO #	Description	Date	Appr
-		RELEASED	7/07/10	

APPROVED: _____
 DATE: _____ TITLE: _____

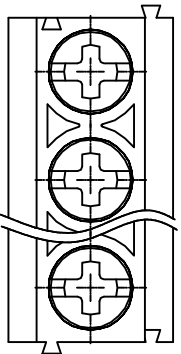

A = .197 [5.00] X No. of Positions
 B = .197 [5.00] x No. of Spaces

SPECIFICATIONS:

- Material: Insulator: Thermoplastic, rated UL 94V-0
- Wire Cage: Stainless steel
- Screw: Steel, M2.5/Zn plated
- Contact: Brass, Tin plated
- Electrical: Operation voltage: 300 VAC max
- Current rating: 8 Amps max per Pole
- Dielectric withstanding voltage: 1600 VAC for 1 minute
- Mechanical: Screw Torque(Lb-In): 3.5
- Wire Range: 14-26 Awg
- Environmental: Operating temperature: -40°C to +115°C
- Lead free, ROHS compliant.
- Recommended soldering temp: 235°C for 5 sec.



UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE MM [INCHES]
 TOLERANCES: EXCEPT AS NOTED

INCHES	HOLES
.X ± .10	ØXX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXXX ± .010

APPROVALS: _____ DATE: _____

DRAWN: DY 7/07/10

CHECKED: _____

APPROVED: _____

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: TERMINAL BLOCK, PCB, .197" [5.00] PITCH, STRAIGHT

SIZE	PART NO.	REV.
X	EB15-XX-C-180	-

REF: S00007T SCALE: NTS SHEET 1 OF 1