



PANEL THICKNESS	X
0.75-1.25	19.2
1.25-2.00	19.4
2.00-3.00	19.8

RECOMMENDED
PANEL CUT-OUT



▲ OFF-ON
CIRCUIT: SPST

BODY COLOR:
BLACK

LENS COLOR: GREEN

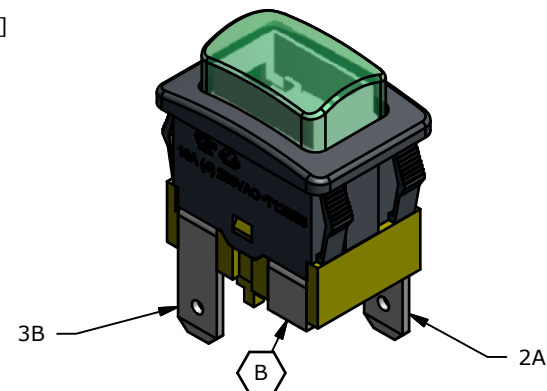

LENS STYLE: ▲
FULL ILLUMINATION

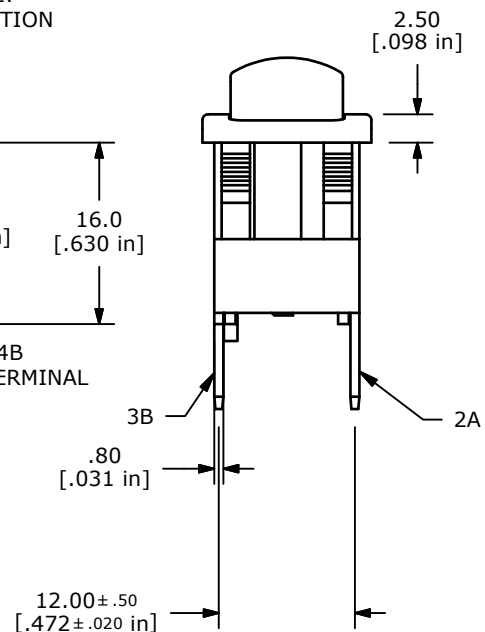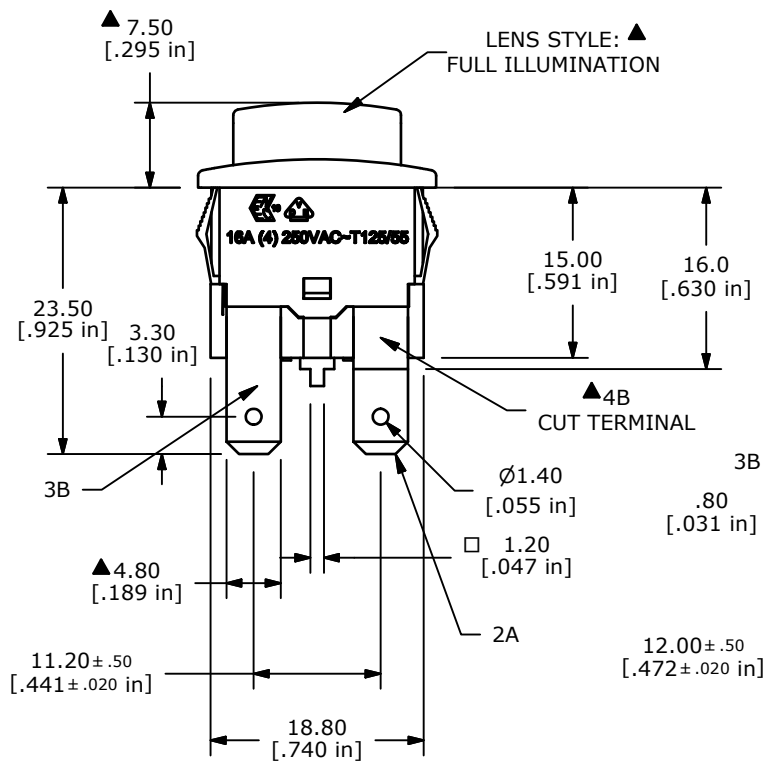

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: $X.X = \pm 0.4$
 $X.XX = \pm 0.25$
3. ELECTRICAL LIFE: 6,000 [cURus]
10,000 [VDE]
4. CONTACT RESISTANCE: 20 mΩ MAX. INITIAL
5. INSULATION RESISTANCE: 100 MΩ AT 500VDC
6. OPERATING TEMPERATURE: -20°C TO +65°C [cURus]
-20°C TO +125°C [VDE]
- ▲ 7. CONTACT RATING: 16A, 125VAC-250VAC, [cURus]
16(4)A, 250VAC, T125/55 [VDE]
8. DIELECTRIC STRENGTH: 1000VAC FOR 1 MINUTE
9. ILLUMINATION VOLTAGE: 125V
10. TERMINALS TO BE SILVER PLATED
11. ▲ DENOTES CRITICAL PARAMETER
12. 2002/95/EC (RoHS) COMPLIANT.

C	21535	Change Housing Locking Tab	8/1/14	rc
B	20974	REMOVE EXTRA TERMINAL	1/18/13	EBP
A	20931	INITIAL RELEASE	12/17/12	EBP
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED



TITLE

PA411C1000-136

SCALE

DATE _____

12/18/2012

DR

EBP

DWG

14-PA411C1000136

REV
C