

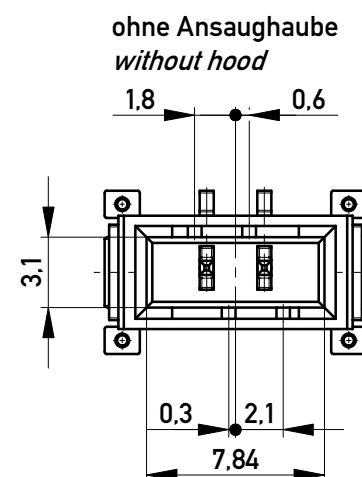
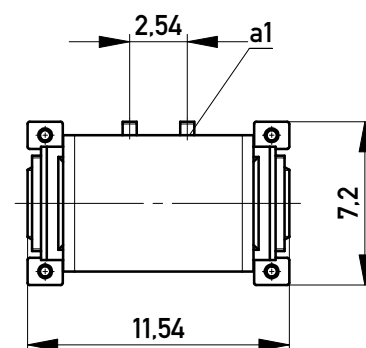
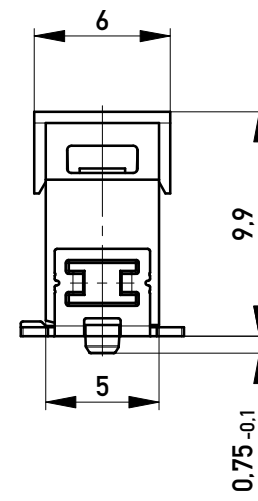


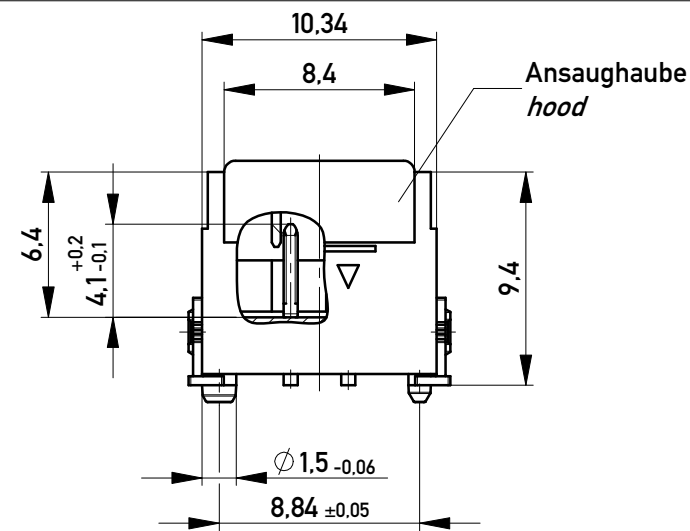

Leiterplatten-Layout Vorschlag für SMT PCB-Layout Proposal for SMT

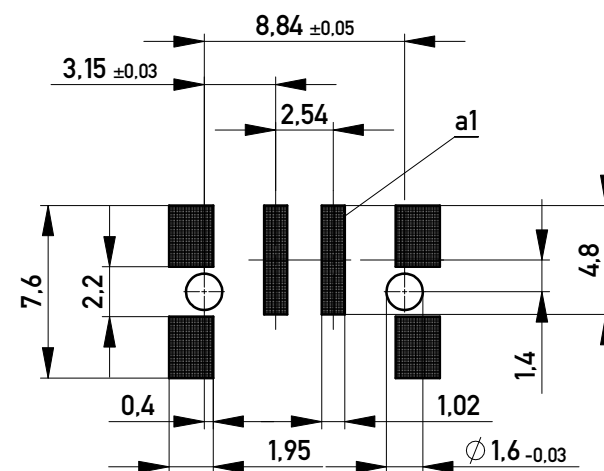


Anforderungsstufe 1
Performance Level 1

Kontaktbereich vergoldet
Mating Area gold plating


Anschlussbereich verzinkt 4-6 µm
Terminal Area 4-6 µm tin plating

Koplanarität der Anschlüsse ≤ 0,1 mm
Coplanarity Area of Termination ≤ 0,1 mm


Verpackt im Gurt in Anlehnung an DIN IEC 60286-3
Tape on Reel Packaging according to DIN IEC 60286-3
Verpackungseinheit: 320 Stück
Packaging unit: 320 pcs

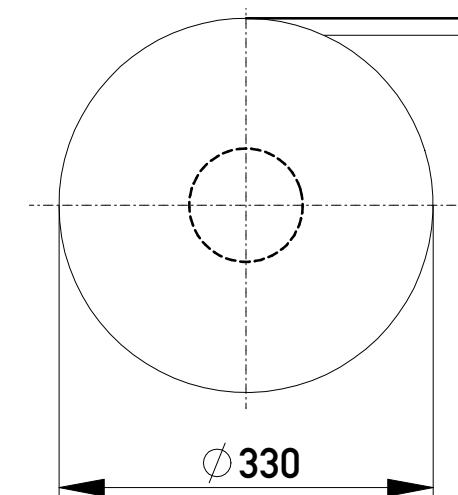

Abspulrichtung - Reel off Direction

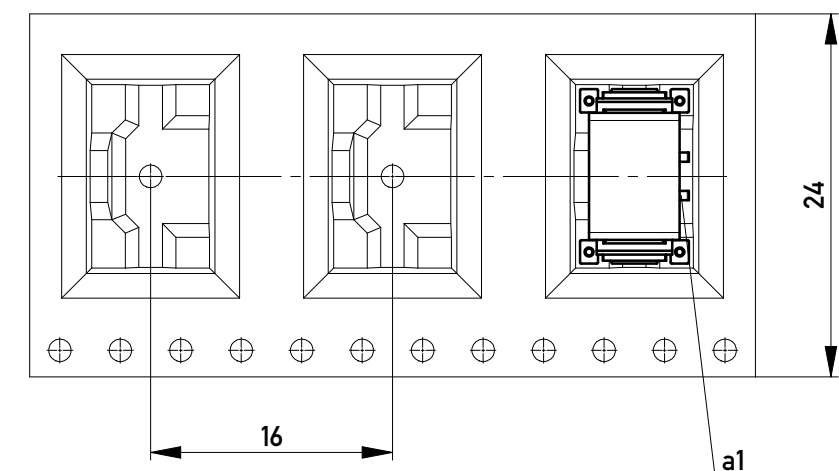

Copyright by ERNI GmbH
Proprietary notice pursuant to ISO 14016 to be observed.

Information: Codierung, schwarz - coding, black				Tolerances		 All Dimensions in mm		Scale 3:1		
All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.				Subject to modification without prior notice. Drawing will not be updated.		Designation M 2,54 SRC-P, 2-polig				
								www.ERNI.com		105503880001
g		23.02.2016								A3
Index		Date						Class SRCP		

Copyright by ERNI GmbH
Proprietary notice pursuant to ISO 16016 to be observed.