

2410, RoHS Compliant & Pb-Free SMD NANO FUSE (SLOW-BLOW) 方型超微表面贴片式保险丝 (慢断型)

INTERRUPTING CAPACITY / 分断能力:

50A at 250V AC (200mA-5A)

100A at 125V DC/AC (200mA-5A)

TECHNICAL PARAMETERS/ 技术参数:

CATALOG NO. 目录编号	CURRENT RATING 额定电流	SAFETY APPROVALS 安全认证	REFERENCE (A ² .Sec.) (RoHS) I ² T 参考值
		UR/cUR	
25T-0200H/L	200mA	●	0.06
25T-0250H/L	250mA	●	0.08
25T-0315H/L	315mA	●	0.130
25T-0375H/L	375mA	●	0.186
25T-0400H/L	400mA	●	0.210
25T-0500H/L	500mA	●	0.329
25T-0630H/L	630mA	●	0.532
25T-0750H/L	750mA	●	0.845
25T-0800H/L	800mA	●	1.16
25T-010H/L	1A	●	1.88
25T-012H/L	1.2A	●	3.10
25T-013H/L	1.25A	●	3.56
25T-015H/L	1.5A	●	4.49
25T-016H/L	1.6A	●	4.98
25T-020H/L	2A	●	5.18
25T-025H/L	2.5A	●	10.66
25T-030H/L	3A	●	14.01
25T-032H/L	3.15A	●	15.04
25T-035H/L	3.5A	●	15.51
25T-040H/L	4A	●	24.22
25T-050H/L	5A	●	32.39

● DENOTES FOR APPROVED

● 表示已取得安全认证

H DENOTES FOR 250V

L DENOTES FOR 125V

ELECTRICAL CHARACTERISTICS/ 电气特性:

% of CURRENT RATING 额定电流的 %	BLOWING TIME 熔断时间	
100%	4 hours Min.	最快 4 小时
200%	1-60 seconds	1-60 秒
300%	0.2-3 seconds	0.2-3 秒
800%	0.01-0.1 seconds	0.01-0.1 秒

Standards/ 标准: UL 248-1, UL 248-14


Operating Temperature/ 工作温度: -55°C ~125°C

Storing Temperature/ 储存温度: -55°C ~85°C


Resistance to soldering heat/ 耐焊接热性: 260°C ±5°C, 30s ±5s

Solderability/ 可焊性: MIL-STD-202, Method 208

Dimensions/ 尺寸

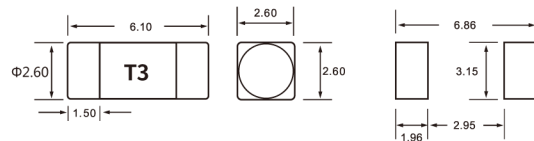

Land Pattern:




Unit 单位: mm

PACKING/ 包装:

1,000 PIECES TAPED AND REELED IN ONE BOX

每卷 1,000 只保险丝, 装入一个包装盒

BOX SIZE/ 包装盒尺寸:

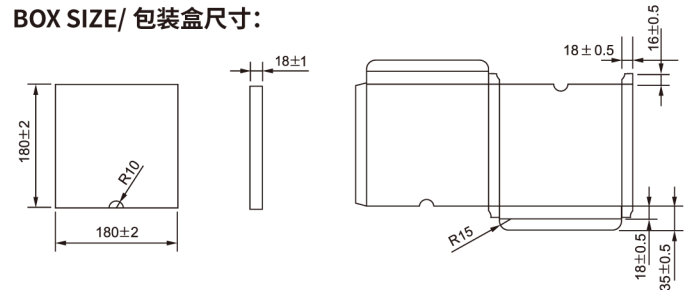

Unit 单位: mm

25T AVERAGE I-T CHARACTERISTICS CURVE

(FOR REFERENCE ONLY)

25T 平均 I-T 曲线图 (仅供参考)

