
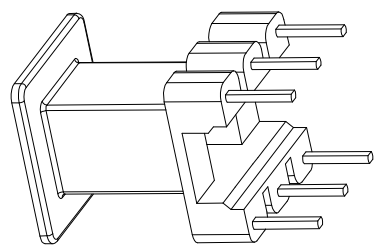
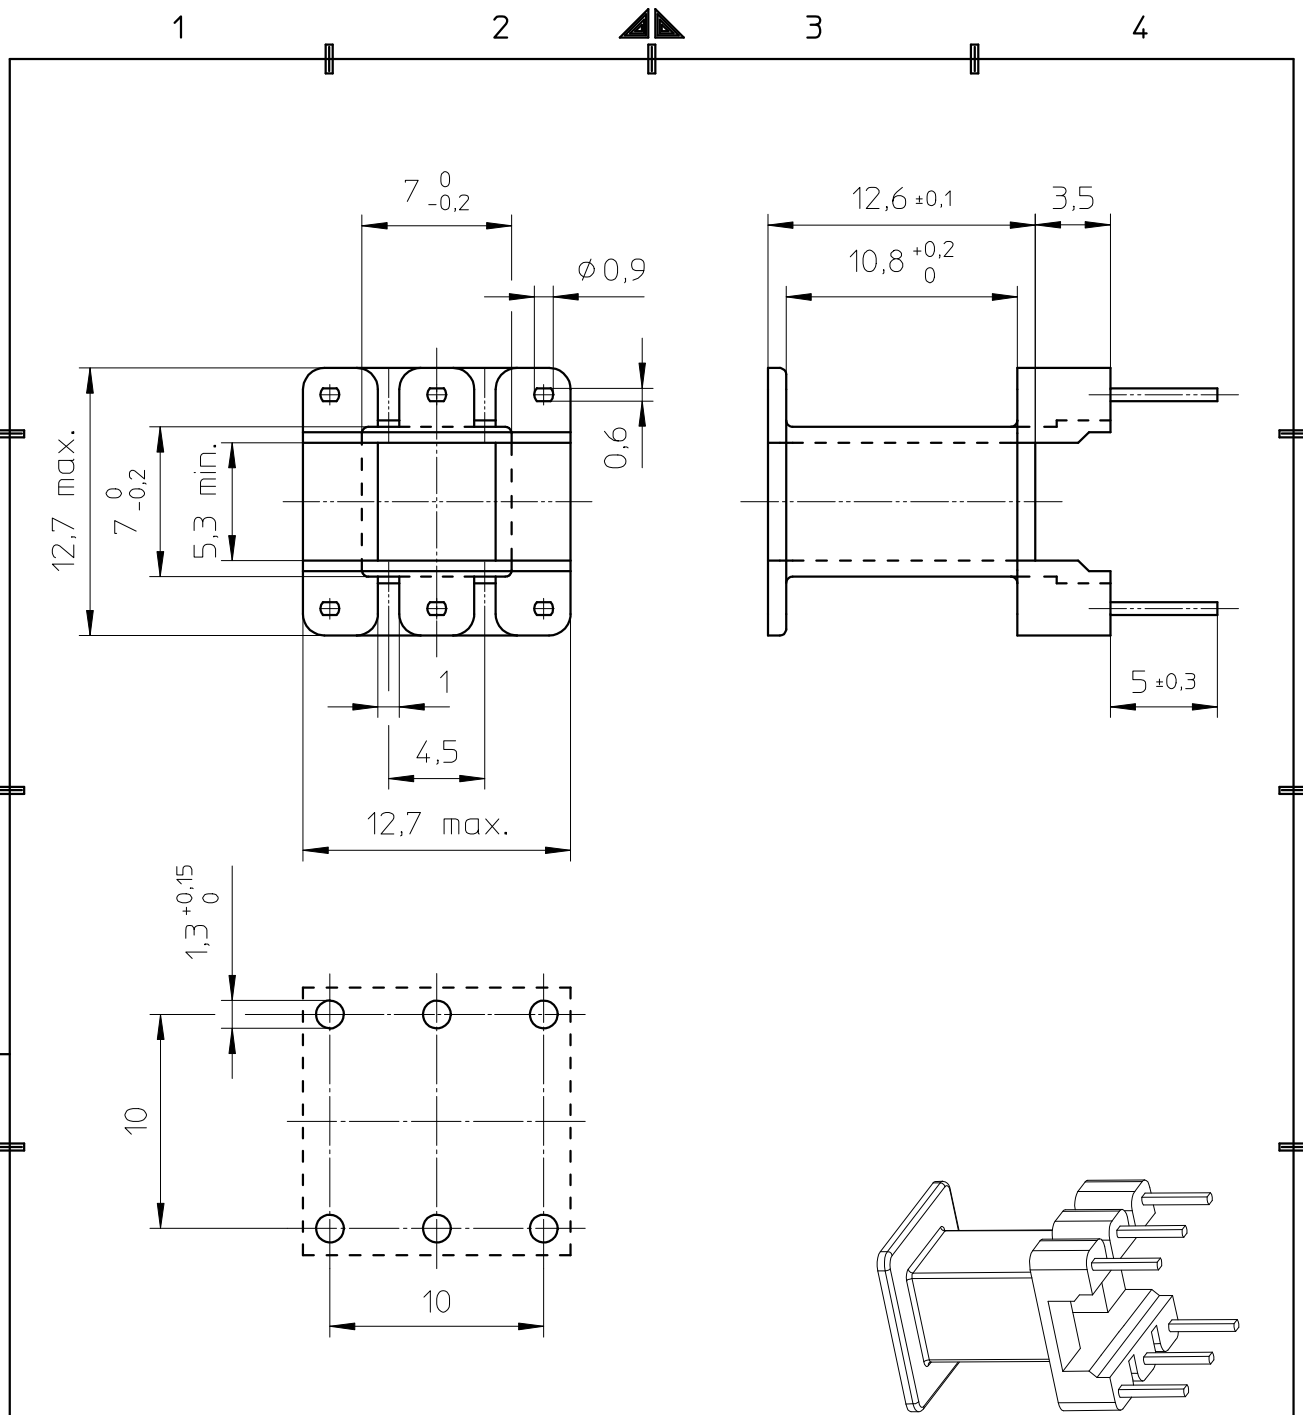



FERROXCUBE



Coil former material: Ultramide A3WG7 (PA6.6), glass-reinforced.
 UL file number: E41871(M) - UL94HB.
 Pin material: CuSn - Ni flash, Sn plated.
 Max. operating temp.: acc. to IEC 85 class B, 130°C.
 Resistance to soldering heat: acc. to IEC 68-2-20 Part 2, Test Tb, method 1B, 350°C - 3,5s
 Solderability: acc. to IEC 68-2-20 Part 2, Test Ta, method 1, 235°C - 2s.
 Min. winding area: 28,6 mm².
 Mean length of turn: 38,7 mm.

CLASS.NO.		CPV-E20/10/5-1S-6P		4322 021 20292		97-10-16		06-09-20	
NAME NAAM		A.Wojtasz		SUPERS. VERV.		97-10-16		1 SH BL	
MPA		CHECK CONTR.		DAT.		Property of Eigendom van		© FERROXCUBE 2000	
								112 - 001 010	
								A4	