

- › Extended temperature range
- › iXtra – long term high performance


Performance Data

(Typical values for batteries stored at +25 °C for one year)


| | |
|-----------------------------------|--------------------------|
| System | Lithium Thionyl Chloride |
| Nominal voltage | 3.6 V |
| Nominal capacity | 1.8 Ah |
| Nominal current | 2 mA |
| Max. continuous discharge current | 100 mA |
| Pulse current capability | 200 mA |
| Anode surface area | 14 cm ² |
| Lithium content | 0.65 g |
| Weight | 18 g |
| Volume | 8 cm ³ |
| Temperature range | -55 °C ... +130 °C |




Typical Discharge Curves at +25 °C

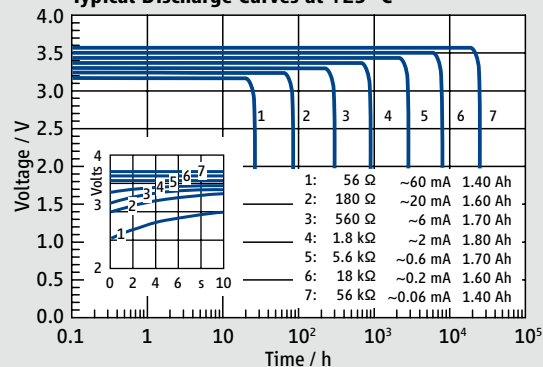


Available Capacity

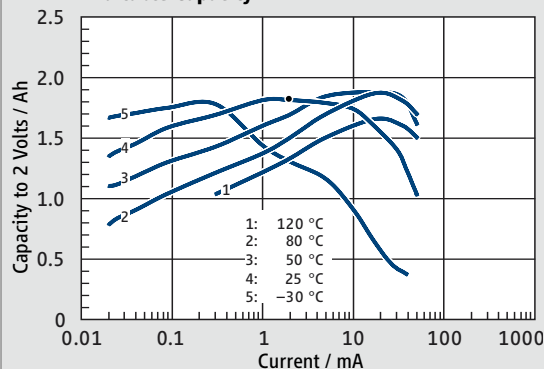


Operating Voltage

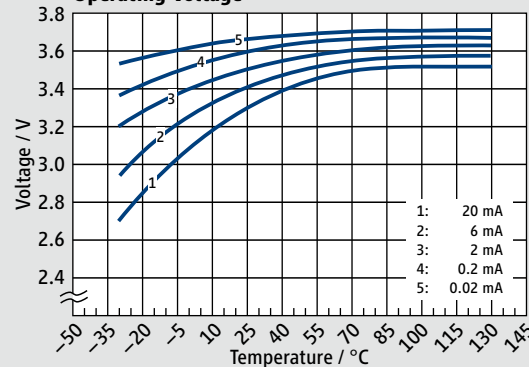


SL-560/S

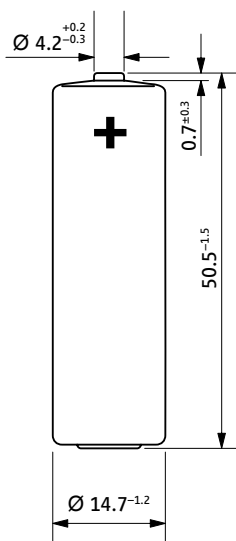


SL-560/T

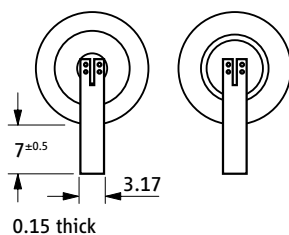


SL-560/P

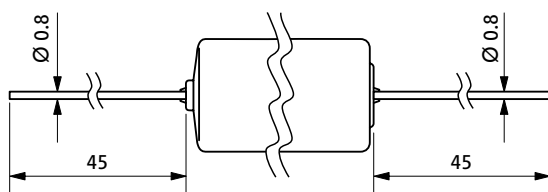

SL-560/PR



SL-560/PT



Available Terminations

| Termination | Standard | Catalogue No. |
|-------------|----------------|---------------|
| SL-560/S | Standard | 11 1 05601 00 |
| SL-560/T | Tags | 11 1 05602 00 |
| SL-560/P | Pins | 11 1 05603 00 |
| SL-560/PR | Pins radial | 11 1 05606 00 |
| SL-560/PT | Polarized tags | 11 1 05608 00 |

WARNING:
Fire, explosion, and severe burn hazard. Do not recharge, disassemble, heat above 150 °C, incinerate, or expose contents to water.