PHASE LOCKED OSCILLATOR

MODEL 626106 (11 GHz)

Features

- **Low Phase Noise: -85 dBc/Hz @ 100 Hz**
- **Low Spurious: -70 dBc Typical**
- **External Reference: 100 MHz**
- **Environmental Screening Available**

Specifications

CHARACTERISTIC	TYPICAL Ta= 25 ºC	MIN/MAX Ta = -20 ºC to +70 ºC
Frequency	11 GHz	11 GHz
Output Power (dBm)	+13	+12
Variation Over Temperature (dBm)	+/- 0.75 dBm	+/- 1 dBm
Spurious (dBc)	-70	-60
Phase Noise (dB)	-58 dBc/Hz @ 10 Hz -85 dBc/Hz @ 100 Hz -111 dBc/Hz @ 1 KHz -119 dBc/Hz @ 10 KHz -123 dBc/Hz @ 100 KHz	
VSWR	1.5	2.0
Harmonics (dBc)	-25	-20
External Reference (MHz)	100	100
Lock Indicator	TTL (High=Locked)	TTL (Low=Unlocked)
Storage Temperature	-55 ºC	+125 ºC
Supply Power DC mA	15 120	15 125


Description

Spectrum Microwave's Series 600 Phase Locked Oscillators use a High "Q" Dielectric Resonator in the resonant circuit. The circuit is lightly loaded to obtain the lowest phase noise possible.

The resonator is screwed to a printed circuit board and well grounded to minimize modulation sidebands during shock and vibration.

Isolators are used to provide isolation from load VSWRs. Regulators filter noise on the DC input voltage.

Internal reference models are also available. A lock indicator circuit is provided to signal an out-of-lock condition.

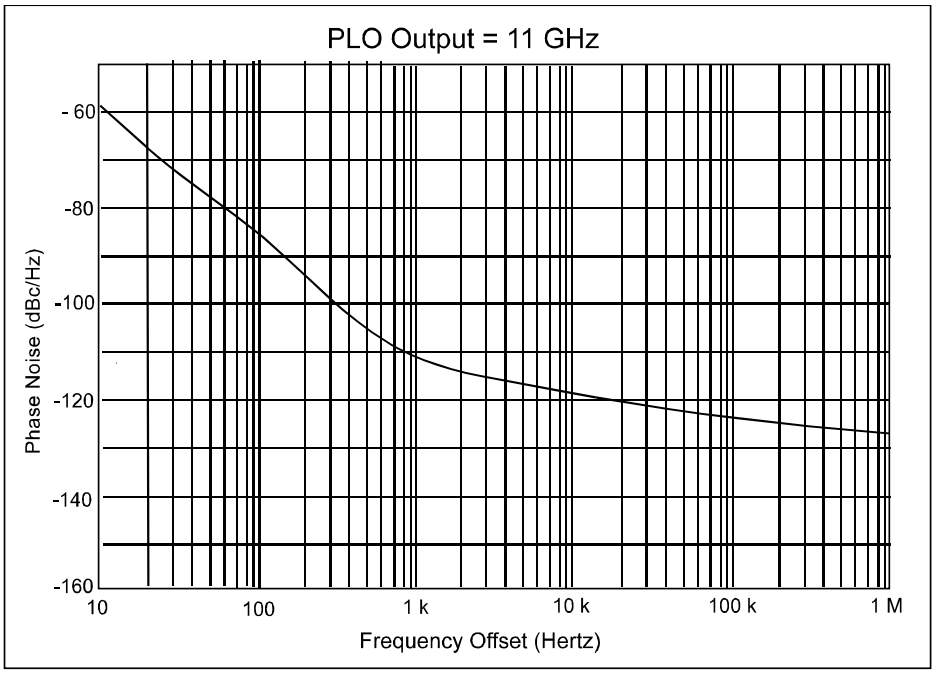


Spectrum Microwave, Inc.
www.SpectrumMicrowave.com
2707 Black Lake Place Phila, Pa. 19154
PH: 215-464-4000 FAX: 215-464-4001
Rev. 7/16/08

PHASE LOCKED OSCILLATOR

MODEL 626106 (11 GHz)

Outline Drawing

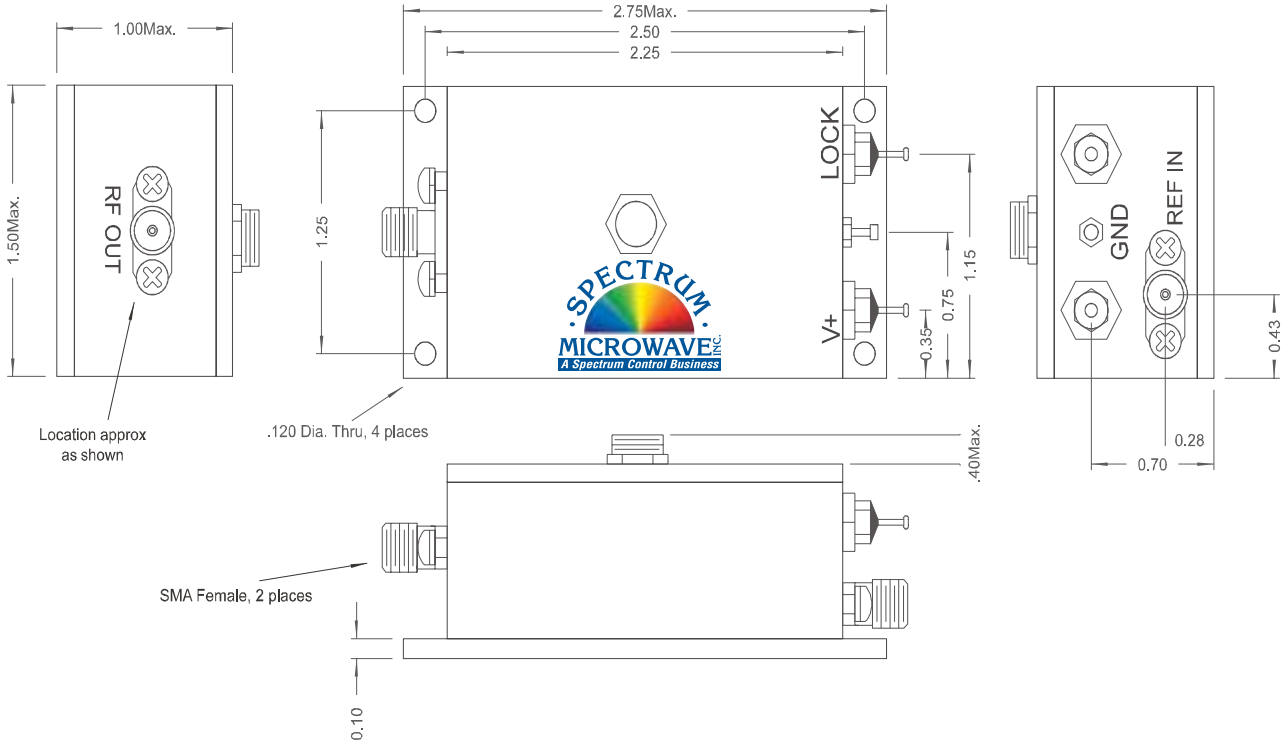

Spectrum Microwave, Inc.
www.SpectrumMicrowave.com

2707 Black Lake Place Phila, Pa. 19154
PH: 215-464-4000 FAX: 215-464-4001