

4

3

2

1

used for:

D-SUB

F

F

E

E

D

D

C


C

B

B

A

A

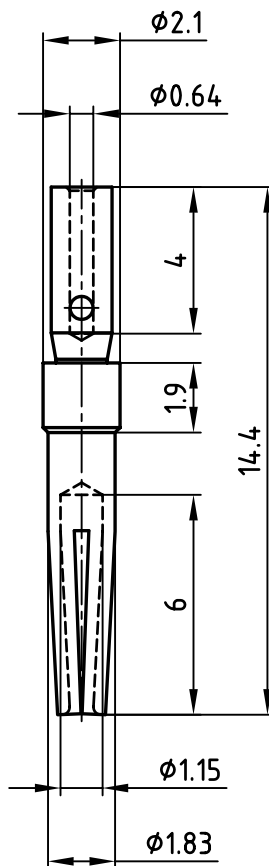**Notes:**

Material: brass

Finish: hard-gold-plated in the contact area

Temperature range: -55°C to +125°C

Rated current: 5.0A


Contact resistance: ≤ 10mOhm

APPROVAL # FREIGABE # DEBLOCKAGE # AUTOR/ZACON # APPROVAL	
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL # FREIGABE # DEBLOCKAGE # AUTOR/ZACON # APPROVAL	

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH
DO NOT ALTER CAD DRAWING BY HAND

1 x b	Ä 2127	02.12.2004	Lehmen
rev.	description	date	name

tolerance



2003	date	name
drawn	14.02.	Parei
appd.	14.02.	Kühle
norm		
d-old		

scale: 5:1

material: SEE NOTES

title:

CRIMP SOCKET CONTACTscrew machined version
accepts cable AWG 28-24

dwg no:

AutoCAD 2000

DIN-A

16K1A886

4

sh: 1/1

part no:

162A18719X

4

3

2

1