
FEATURES

- **Max. propagation delay of 900ps**
- **I_{EE} min. of –92mA**
- **Industry standard 100K ECL levels**
- **Extended supply voltage option: V_{EE} = –4.2V to –5.5V**
- **Voltage and temperature compensation for improved noise immunity**
- **Internal 75KΩ input pull-down resistors**
- **60% faster than Fairchild 300K at lower power**
- **Function and pinout compatible with Fairchild F100K**
- **Available in 24-pin CERPACK and 28-pin PLCC packages**


BLOCK DIAGRAM

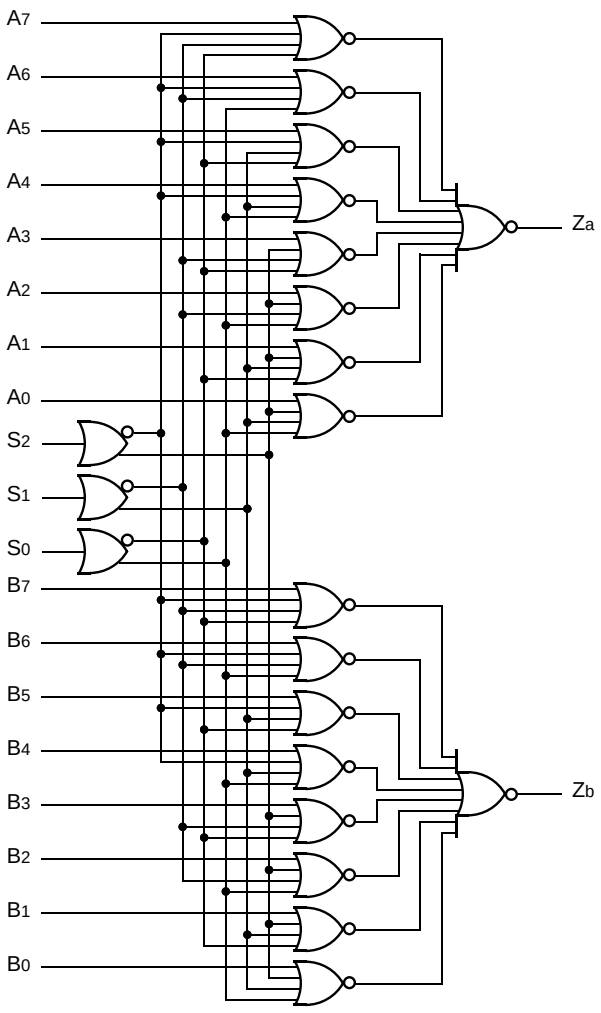


DESCRIPTION

The SY100S363 is a dual 8-input multiplexer designed for use in new, high-performance ECL systems. The three Data Select inputs (S_0, S_1, S_2) determine the bits from each of the inputs (A_n, B_n) that will be passed on through the two outputs. The same bit will be selected from the two groups of 8 inputs. The inputs on this device have 75KΩ pull-down resistors.

PIN CONFIGURATIONS

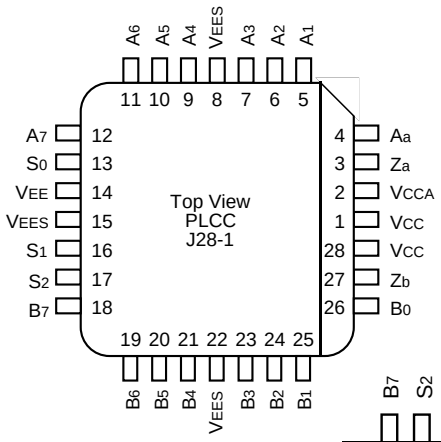

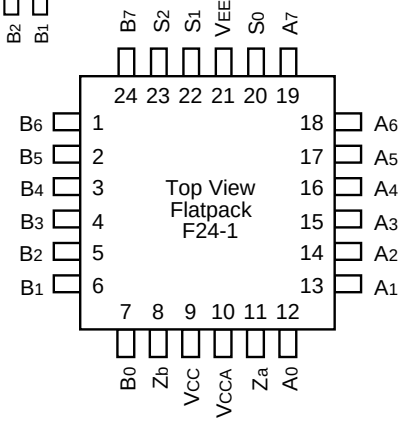

PIN NAMES

Pin	Function
$S_0 – S_2$	Data Select Inputs
$A_0 – A_7$	A Data Inputs
$B_0 – B_7$	B Data Inputs
Z_a, Z_b	Data Outputs
V_{EES}	V_{EE} Substrate
V_{CCA}	V_{CCO} for ECL Outputs

TRUTH TABLE[1]

Inputs											Outputs
Select			Data								
S_2	S_1	S_0	A_7/B_7	A_6/B_6	A_5/B_5	A_4/B_4	A_3/B_3	A_2/B_2	A_1/B_1	A_0/B_0	Z_a/Z_b
L L	L L	L L								L H	L H
L L	L L	H H							L H		L H
L L	H H	L L						L H			L H
L L	H H	H H					L H				L H
H H	L L	L L				L H					L H
H H	L L	H H			L H						L H
H H	H H	L L		L H							L H
H H	H H	H H	L H								L H

NOTE:

1. H = HIGH Voltage Level
   L = LOW Voltage Level
   Blank = X = Don't Care

DC ELECTRICAL CHARACTERISTICS

V_{EE} = –4.2V to –5.5V unless otherwise specified; V_{CC} = V_{CCA} = GND

Symbol	Parameter	Min.	Typ.	Max.	Unit	Condition
I_{IH}	Input HIGH Current S_n A_n, B_n	 — —	 — —	 200 200	µA	V_{IN} = V_{IH} (Max.)
I_{EE}	Power Supply Current	–92	–66	–45	mA	Inputs Open

AC ELECTRICAL CHARACTERISTICS

CERPACK

V_{EE} = –4.2V to –5.5V unless otherwise specified; V_{CC} = V_{CCA} = GND


		T_A = 0°C		T_A = +25°C		T_A = +85°C			
Symbol	Parameter	Min.	Max.	Min.	Max.	Min.	Max.	Unit	Condition
t_{PLH} t_{PHL}	Propagation Delay A_0 – A_7, B_0 – B_7 to Output	300	1000	300	1000	300	1000	ps	
t_{PLH} t_{PHL}	Propagation Delay S_0 – S_2 to Output	400	1400	400	1400	400	1400	ps	
t_{TLH} t_{THL}	Transition Time 20% to 80%, 80% to 20%	300	1000	300	1000	300	1000	ps	

PLCC

V_{EE} = –4.2V to –5.5V unless otherwise specified; V_{CC} = V_{CCA} = GND

		T_A = 0°C		T_A = +25°C		T_A = +85°C			
Symbol	Parameter	Min.	Max.	Min.	Max.	Min.	Max.	Unit	Condition
t_{PLH} t_{PHL}	Propagation Delay A_0 – A_7, B_0 – B_7 to Output	300	900	300	900	300	900	ps	
t_{PLH} t_{PHL}	Propagation Delay S_0 – S_2 to Output	400	1300	400	1300	400	1300	ps	
t_{TLH} t_{THL}	Transition Time 20% to 80%, 80% to 20%	300	900	300	900	300	900	ps	

TIMING DIAGRAM

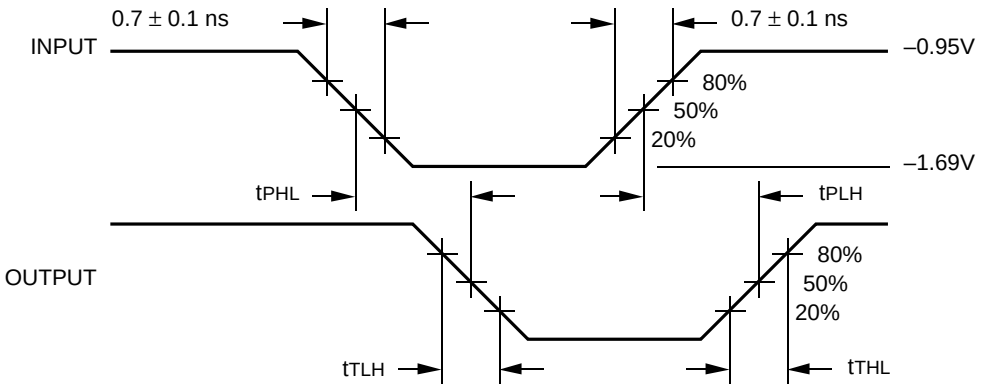


Propagation Delay and Transition Times

NOTE:
V_{EE} = –4.2V to –5.5V unless otherwise specified; V_{CC} = V_{CCA} = GND

PRODUCT ORDERING CODE

Ordering Code	Package Type	Operating Range
SY100S363FC	F24-1	Commercial
SY100S363JC	J28-1	Commercial
SY100S363JCTR	J28-1	Commercial


24 LEAD CERPACK (F24-1)

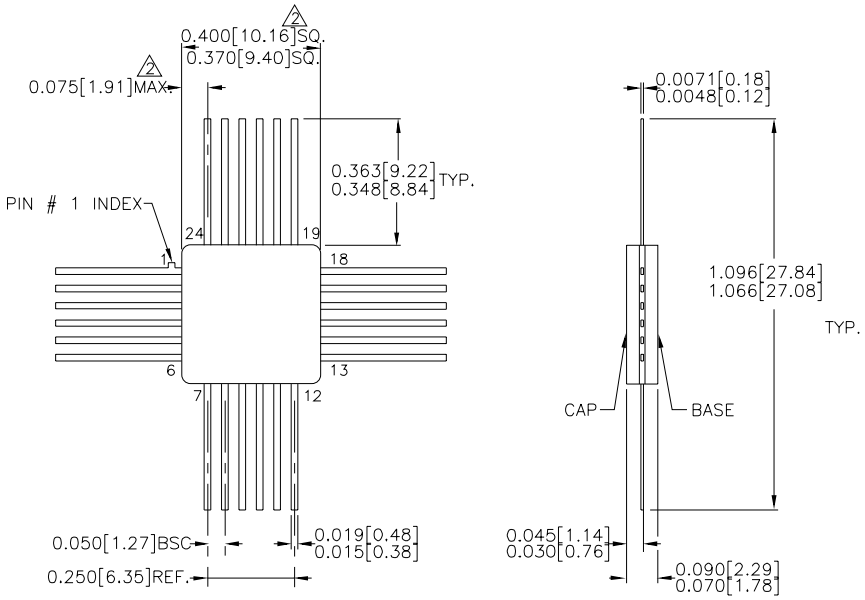

NOTES:
1. DIMENSIONS ARE IN INCHES[MM].
2. THIS DIMENSION INCLUDES GLASS PROTRUSION AND CAP TO BASE ALIGNMENT TOLERANCES.
3. DIMENSIONS SHOWN ARE MAX/MIN, WHERE NOTED.

Rev. 03

28 LEAD PLCC (J28-1)

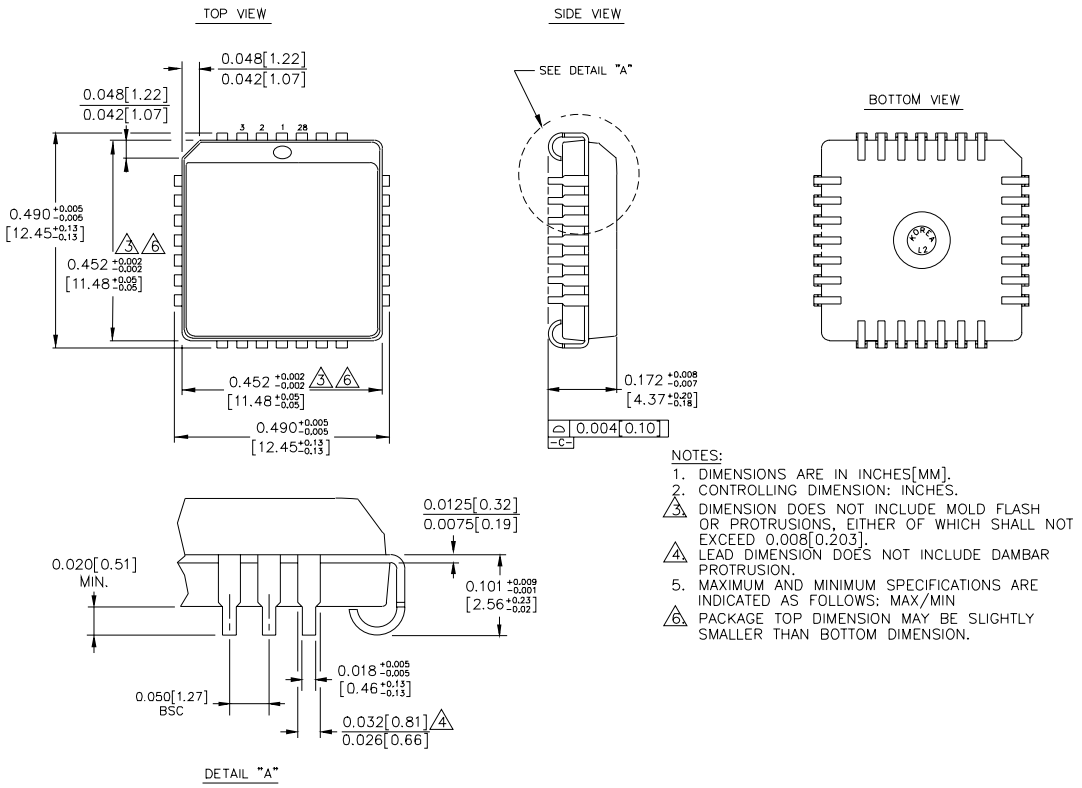

NOTES:
1. DIMENSIONS ARE IN INCHES[MM].
2. CONTROLLING DIMENSION: INCHES.
3. DIMENSION DOES NOT INCLUDE MOLD FLASH OR PROTRUSIONS, EITHER OF WHICH SHALL NOT EXCEED 0.008[0.203].
4. LEAD DIMENSION DOES NOT INCLUDE DAMBAR PROTRUSION.
5. MAXIMUM AND MINIMUM SPECIFICATIONS ARE INDICATED AS FOLLOWS: MAX/MIN
6. PACKAGE TOP DIMENSION MAY BE SLIGHTLY SMALLER THAN BOTTOM DIMENSION.

Rev. 03

MICREL-SYNERGY 3250 SCOTT BOULEVARD SANTA CLARA CA 95054 USA

TEL + 1 (408) 980-9191 FAX + 1 (408) 914-7878 WEB http://www.micrel.com

This information is believed to be accurate and reliable, however no responsibility is assumed by Micrel for its use nor for any infringement of patents or other rights of third parties resulting from its use. No license is granted by implication or otherwise under any patent or patent right of Micrel Inc.

© 2000 Micrel Incorporated