

SAW Filter 350.0MHz

Model: TB0619A

Part No: MP05901

Rev No: 1

A. MAXIMUM RATING:

Electrostatic Sensitive Device (ESD)

1. Operating Temperature: -25°C to +70°C
2. Storage Temperature: -40°C to +85°C
3. Maximum Input Power: 10dBm

B. ELECTRICAL CHARACTERISTICS:

Ambient Temperature: 25°C

Item	Unit	Min.	Typ.	Max.
Center frequency Fc	MHz	-	350	-
Insertion loss at Fc	dB	-	14.5	18
Bandwidth at -1.0dB	MHz	30.0	30.2	-
Bandwidth at -6.0dB	MHz	-	36.6	38.0
Bandwidth at -25.0dB	MHz		42.7	45
Amplitude Ripple (Fc ± 15MHz)	dB	-	1.3	1.5
Group Delay Ripple (Fc ± 15MHz)	nS	-	46	100
Absolute Group delay at Fc	nS	-	283	-
Temp Coefficient	ppm/°C	-	-18	-

SAW Filter 350.0MHz
Part No: MP05901

Model: TB0619A
Rev No: 1

C. FREQUENCY CHARACTERISTICS:

1. S21 Response

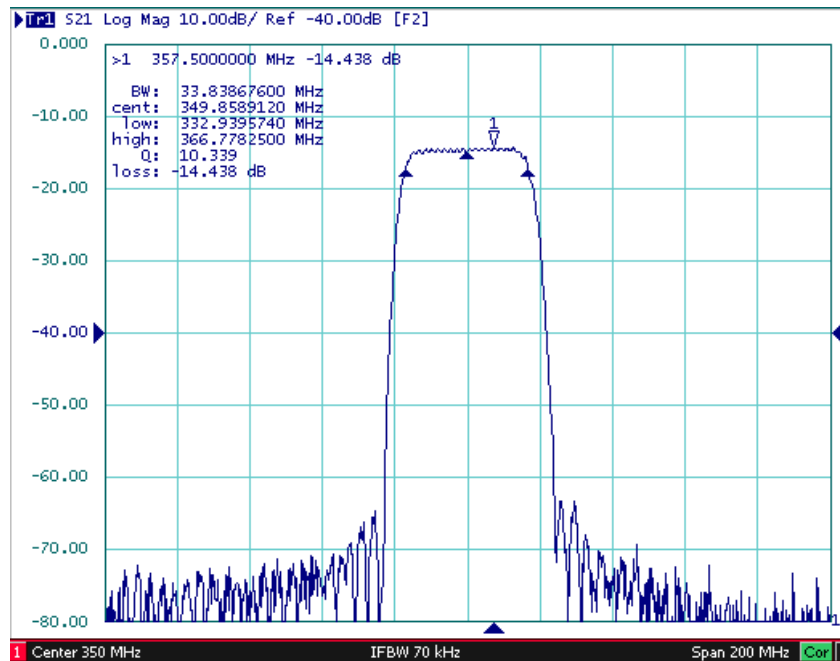


Fig. 1. Horizontal: 20MHz / Div, Vertical: 10dB / Div

2. Passband Ripple

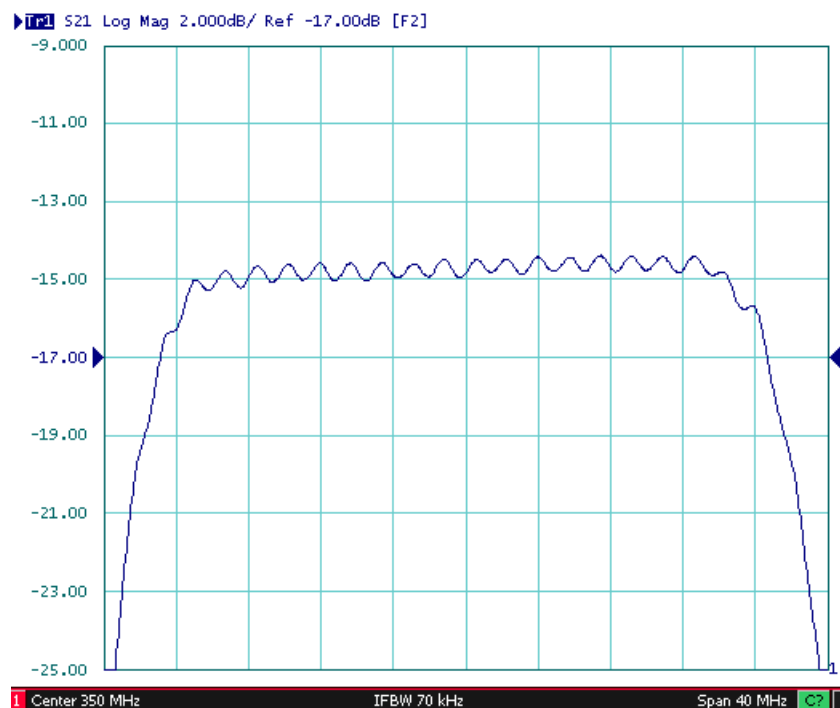


Fig. 2. Horizontal: 4MHz / Div, Vertical: 2dB / Div

SAW Filter 350.0MHz
Part No: MP05901

Model: TB0619A
Rev No: 1

3. Group Delay Ripple


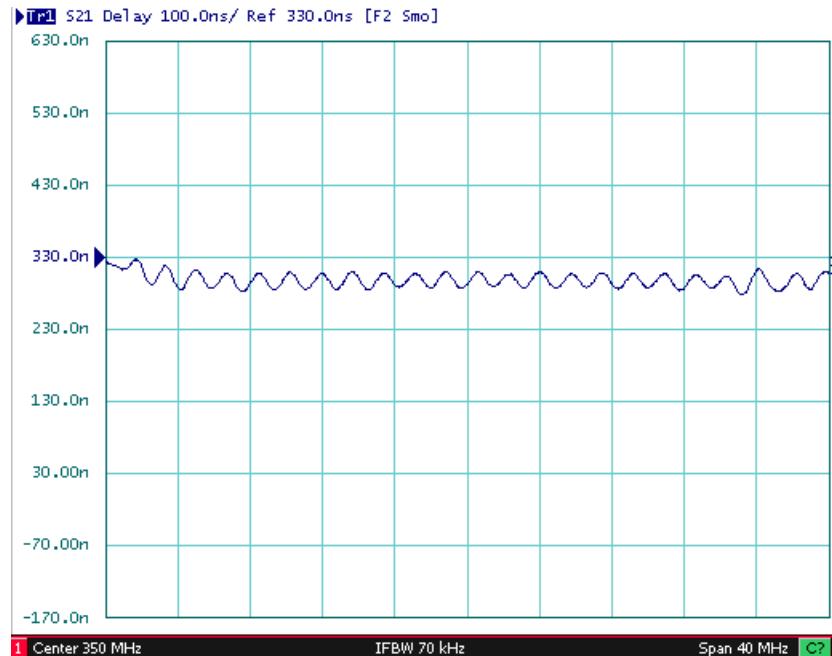


Fig. 3. Horizontal: 4MHz / Div, Vertical: 100nS / Div

D. MEASUREMENT CIRCUIT:

Single ended input 50 ohm to Single ended Output 50 ohm

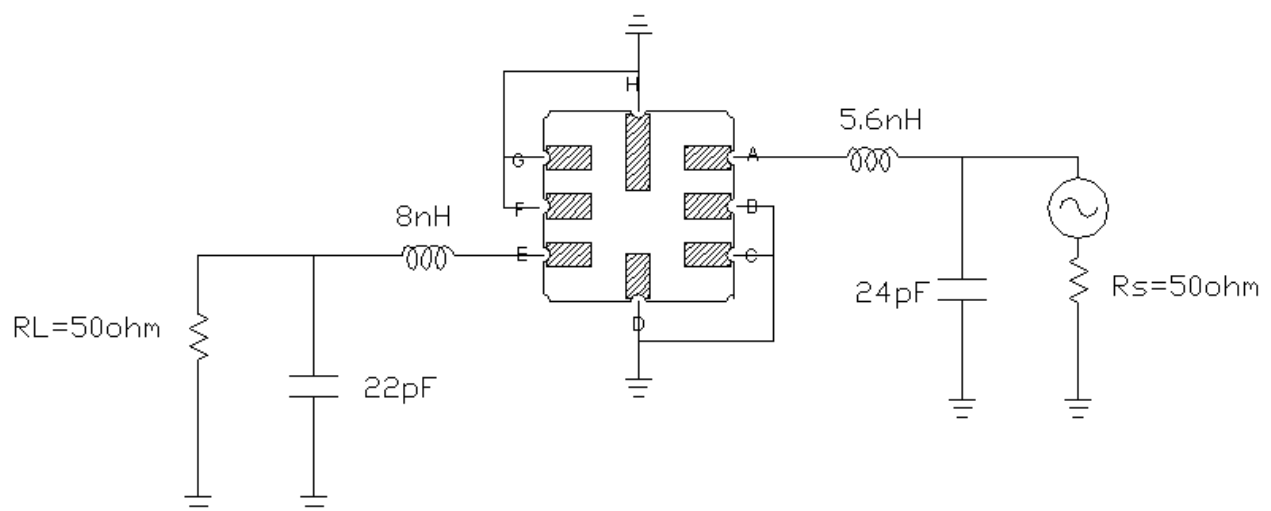


Note: The matching structure will change according to different test fixture.


SAW Filter 350.0MHz
Part No: MP05901

Model: TB0619A
Rev No: 1

E. OUTLINE DRAWING:

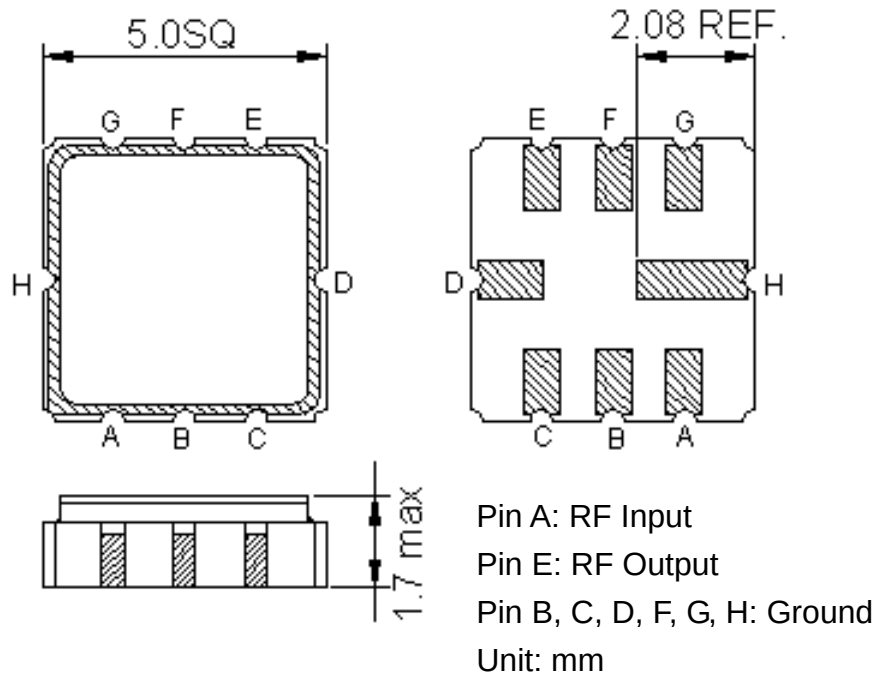

F. PCB FOOTPRINT

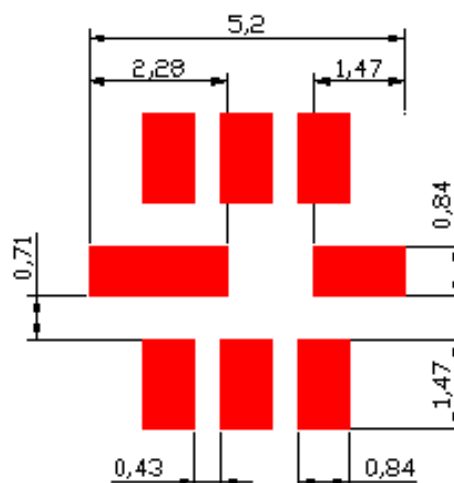


SAW Filter 350.0MHz
Part No: MP05901


Model: TB0619A
Rev No: 1

G. PACKING:

1. Reel Dimension (Please refer to FR-75D10 for packing quantity)

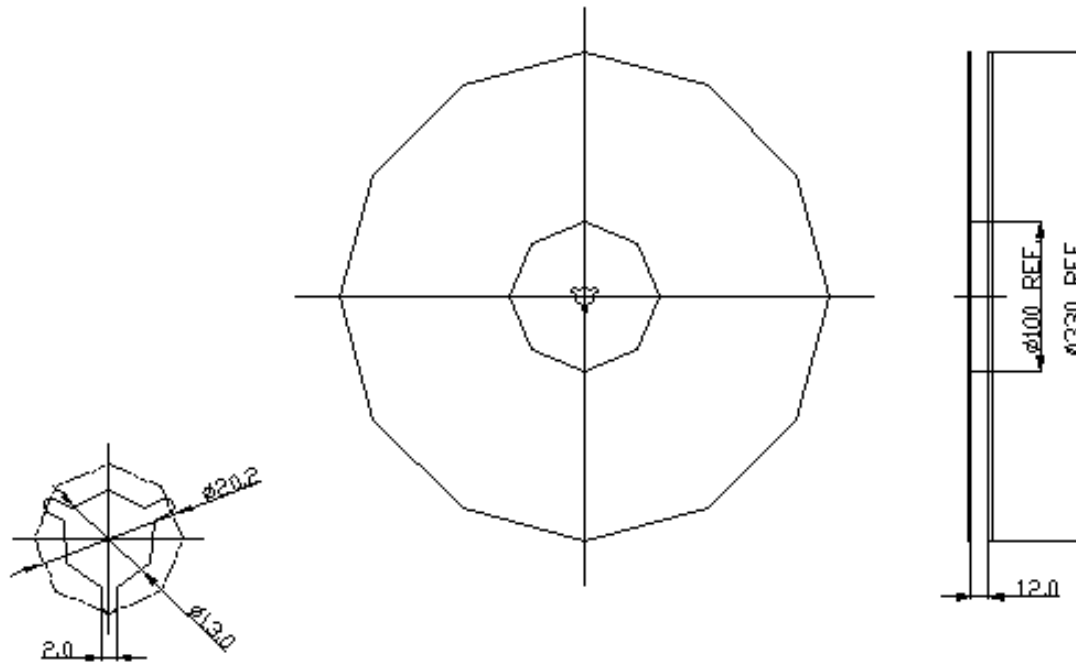

2. Tape Dimension

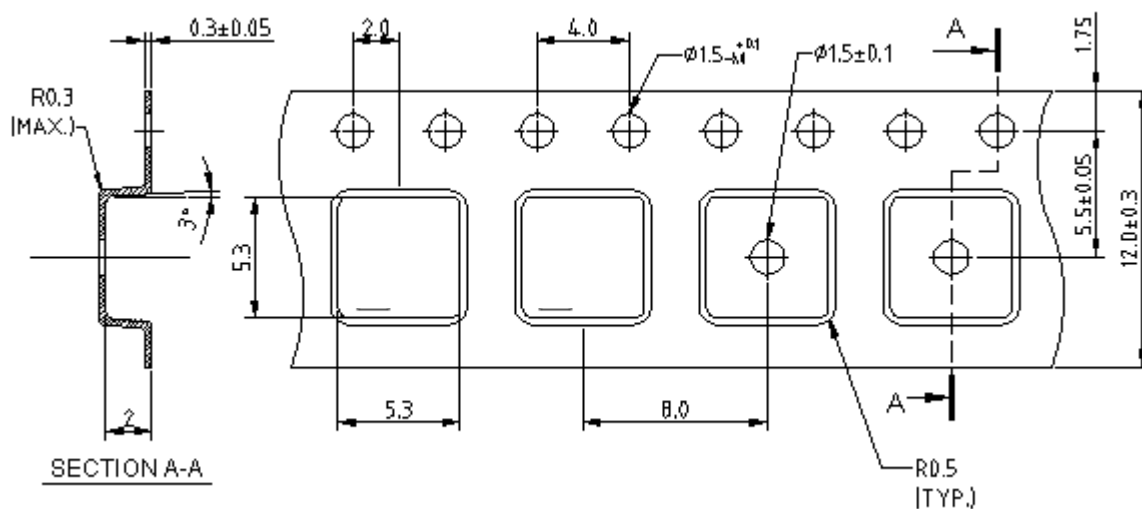

SAW Filter 350.0MHz

Model: TB0619A

Part No: MP05901

Rev No: 1

H. RECOMMENDED REFLOW PROFILE:

