


Helping Customers Innovate, Improve & Grow



Description

Vectron's VT-860 Temperature Compensated Crystal Oscillator (TCXO) is a quartz stabilized, Clipped sine wave output, analog temperature compensated oscillator, operating off a 3.3, 2.8, 2.5 or 1.8 volt supply in a hermetically sealed 2.0 x 1.6 mm ceramic package.


Features

- 13.000 - 52.000MHz Output Frequency
- ± 0.5 ppm Temperature Stability over -40°C to 85°C
- Optional Frequency Tuning
- Fundamental Crystal Design
- Gold over nickel contact pads
- Hermetically Sealed 2.0 x 1.6mm Ceramic SMD package
- Product is compliant to RoHS directive  and fully compatible with lead free assembly

Applications

- GNSS Modules
- LoRa Base Station
- Wireless Connectivity
- Point to Point Radio
- Manpack Radio
- Test and Measurement

Block Diagram

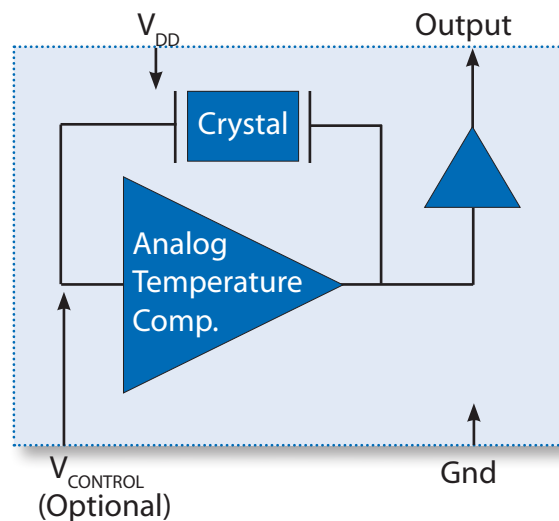


Specifications

Table 1. Electrical Performance, Clipped Sine Wave Option




Parameter	Symbol	Min.	Typ	Max	Units
Output Frequency ¹ , <i>Ordering Option</i>	f_o	13		52	MHz
Supply Voltage ³ , <i>Ordering Option</i>	V_{DD}	+1.8, +2.5, +2.8, +3.0, +3.3			V
Supply Current	I_{DD}			2.3	mA
Operating Temperature, <i>Ordering Option</i>	T_{OP}	-10/70, -20/70, -30/80, -30/85, -40/85			°C
Frequency Stability					
Stability Over T_{OP} ⁴ , <i>Ordering Option</i>	F_{STAB}	±0.50, ±1.00, ±1.50, ±2.00			ppm
Frequency Tolerance ⁵	F_{TOL}			±2.0	ppm
Power Supply Stability, ±5%	F_{PWR}			±0.1	ppm
Load Stability, ±10%	F_{LOAD}			±0.2	ppm
Static Hysteresis	HYS			±0.6	ppm
Aging / 1st year	F_{AGE}			±1.0	ppm
Frequency Tuning (EFC), <i>Ordering Option</i>					
Tuning Range ⁶	PR	±5.0, ±8.0, ±10.0, ±12.0, ±15.0, ±20.0			ppm
Tuning Slope		Positive			
Control Voltage to reach Pull Range 1.8V Supply Voltage Option 2.5V, 2.8V, 3.0V and 3.3V Supply Voltage Option	V_c	0.3 0.5	0.9 1.5	1.5 2.5	V V
Linearity	Lin			10	%
Control Voltage Impedance		500			Kohm
RF Output (Clipped Sine Wave), <i>Ordering Option</i>					
Output Level High	V_o p-p	0.8			V
Output Load	C_L		10k 10pF		
Start Up Time	t_{SU}			2	ms
Phase Noise⁷					
Phase Noise, 26.00MHz ⁷ 10Hz 100Hz 1kHz 10kHz 100kHz	\emptyset_N		-90 -112 -132 -145 -147		dBc/Hz
Integrated Phase Jitter, 26.00MHz (12k-5MHz) ⁷	\emptyset_J		0.4	1.0	ps

1. Refer to Table 7 for Standard Frequencies. Other Frequencies are available on request. Check with factory.
2. Output DC-cut capacitor is optional.
3. The VT-860 power supply pin (Pin4) should be filtered using a by-pass capacitor of 0.1uF for optimal performance.
4. Referenced to the midpoint between minimum and maximum frequency value over Operating Temperature Range.
5. Frequency measured at 25 °C, 1 hour after 2 IR reflows.
6. Referenced to Mid Control Voltage
7. Measured at ambient temperature using Agilent E5052B Signal Source Analyzer.

Typical Phase Noise Performance (26MHz)

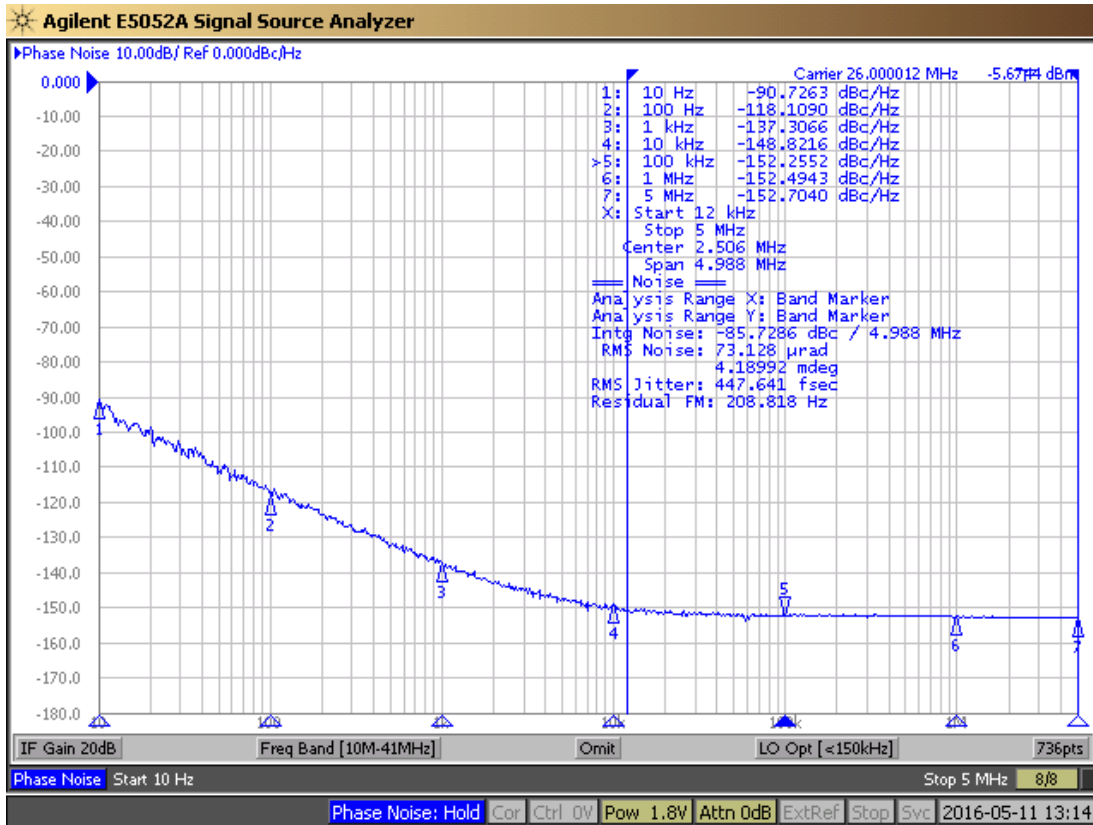

Package Outline Drawing & Pad Layout

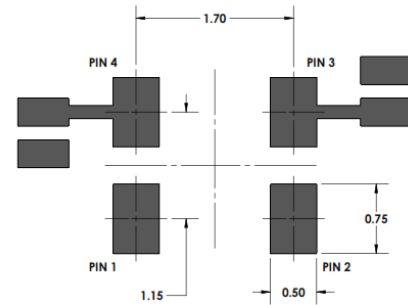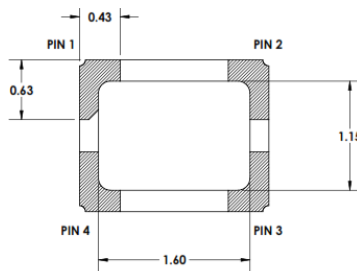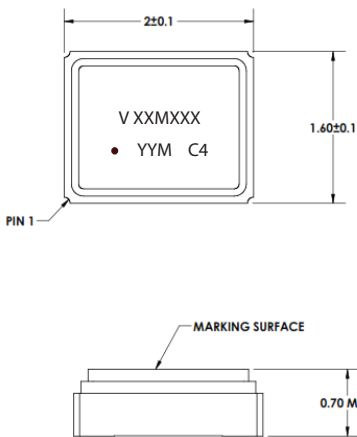

Dimensions in mm

Marking Information

- V - Vectron
- XXMXX - Frequency (Example: 26M000)
- YY - Year of Manufacture
- M - Month of the Year (A-Jan, B-Feb.....K-Nov, L-Dec)
- C4 - Manufacturing Location
- - Pin 1 Indicator

Table 2. Pinout

Pin #	Symbol	Function
1	Vc or NC	TCXO Control Voltage or No Connect
2	GND	Ground
3	OUT	RF Output
4	V _{DD}	Supply Voltage

Note:
0.1μF capacitor is a by-pass power supply filter capacitor placed between Pin4 (Vdd) and Ground for optimal performance. Optional 1000pF DC cut capacitor can be used in the output.

Maximum Ratings

Absolute Maximum Ratings and Handling Precautions

Stresses in excess of the absolute maximum ratings can permanently damage the device. Functional operation is not implied or any other excess of conditions represented in the operational sections of this data sheet. Exposure to absolute maximum ratings for extended periods may adversely affect device reliability.

Although ESD protection circuitry has been designed into the VT-860, proper precautions should be taken when handling and mounting, VI employs a Human Body Model and Charged Device Model for ESD susceptibility testing and design evaluation.

ESD thresholds are dependent on the circuit parameters used to define the model. Although no industry standard has been adopted for the CDM a standard resistance of 1.5kOhms and capacitance of 100pF is widely used and therefor can be used for comparison purposes.

Table 3. Maximum Ratings

Parameter	Symbol	Rating	Unit
Storage Temperature	T_{STORE}	-55/125	°C
Supply Voltage	V_{DD}	-0.6/6	V
Control Voltage	V_C	-0.6/ $V_{DD}+0.6$	V
Enable/Disable Voltage	E/D	-0.6/ $V_{DD}+0.6$	V
ESD, Human Body Model		1500	V
ESD, Charged Device Model		1000	V

Reliability

Table 4. Environmental Compliance

Parameter	Condition
Mechanical Shock	MIL-STD-883 Method 2002
Mechanical Vibration	MIL-STD-883 Method 2007
Temperature Cycle	MIL-STD-883 Method 1010
Solderability	MIL-STD-883 Method 2003
Fine and Gross Leak	MIL-STD-883 Method 1014
Resistance to Solvents	MIL-STD-883 Method 2015
Moisture Sensitivity Level	MSL1
Contact Pads	Gold over Nickel Thickness of Gold: ~0.3um to 1.0um Thickness of Nickel: ~1.27um to 8.89um

IR Reflow


Suggested IR Profile

Devices are built using lead free epoxy and can be subjected to standard lead free IR reflow conditions shown in Table 5. Contact pads are gold over nickel and lower maximum temperatures can also be used, such as 220°C.

Table 5. Reflow Profile

Parameter	Symbol	Value
PreHeat Time	t_s	200 sec Max
Ts-min		150°C
Ts-max		200°C
Ramp Up	R_{UP}	3°C/sec Max
Time above 217C	t_L	150 sec Max
Time to Peak Temperature	$t_{25C\ to\ peak}$	480 sec Max
Time at 260C	t_p	30 sec Max
Time at 240C	t_{p2}	60 sec Max
Ramp down	R_{DN}	6°C/sec Max


Solderprofile:

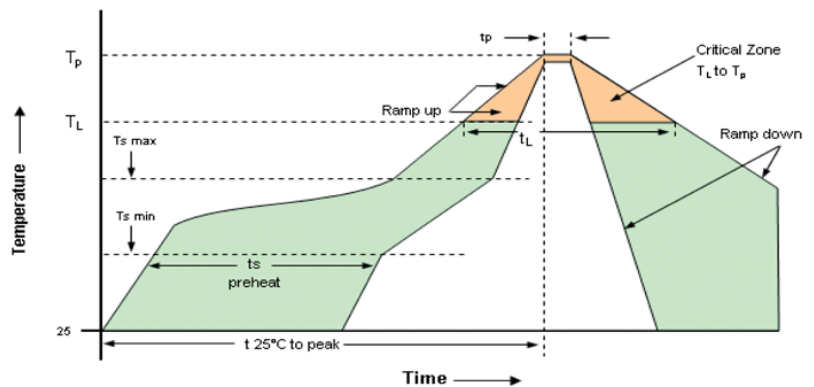

Tape & Reel

Table 6. Tape and Reel Information

Tape Dimensions (mm)					Reel Dimensions (mm)							
W	F	Do	Po	P1	A	B	C	D	N	W1	W2	#/Reel
8	3.5	1.5	4	4	180	2.0	13	20.2	60	9.0	11.4	1000

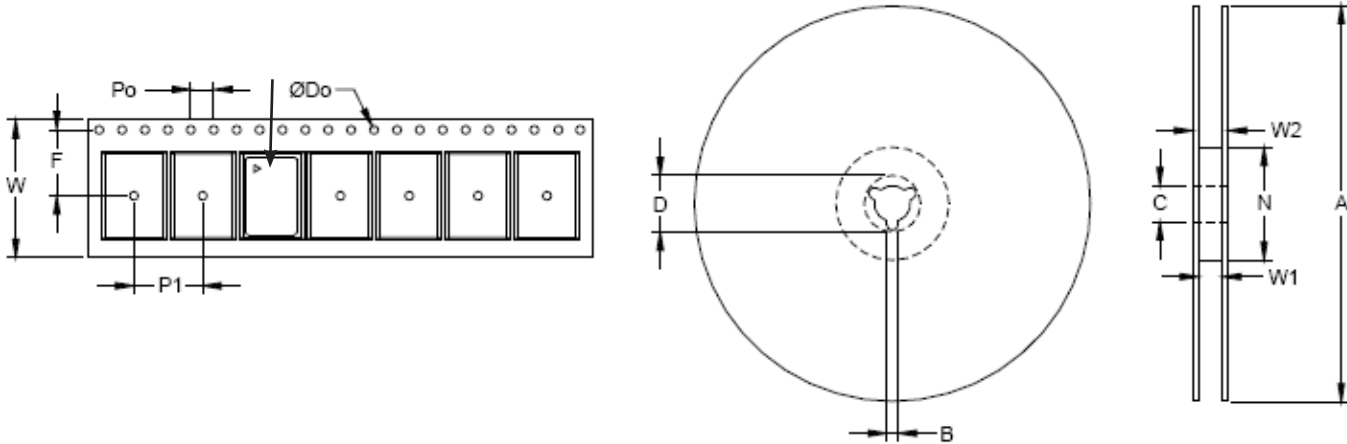

Ordering Information

VT-860- E F W - 507A- xxMxxxxxxx

Product

TCXO

Package

2.0 x 1.6 Package

Voltage Options

- E: +3.3Vdc ± 5%
- F: +3.0Vdc ± 5%
- G: +2.8Vdc ± 5%
- H: +2.5Vdc ± 5%
- J: +1.8Vdc ± 5%

Output

F: Clipped Sine Wave

Temp Range

- W: -10/70°C
- J: -20/70°C
- G: -30/80°C
- H: -30/85°C
- E: -40/85°C

Frequency in MHz

Tuning

- 0: Fixed, No tuning
- A: ±5ppm
- B: ±8ppm
- C: ±10ppm
- D: ±12ppm
- E: ±15ppm
- F: ±20ppm

Stability

- 507: ±0.5ppm
- 106: ±1.0ppm
- 156: ±1.5ppm
- 206: ±2.0ppm

**Note: not all combination of options are available.
Other specifications may be available upon request.*

Example: VT-860-EFW-507A-26M0000000

Standard Frequencies & Capability Chart

Table 7. Standard Frequencies (MHz)

16.000	16.368	16.369	19.200	20.000	24.000	26.000	32.000	32.768	38.400
40.000	48.000								

Note: Other Frequencies are available on request.

Revision History

Revision Date	Approved	Description
May 10, 2016	VN	Rev 0.1 - VT-860 Preliminary Datasheet - Internal Verification, Factory Approval, Product Launch
May 19, 2016	VN	Rev 0.2 - Updated Features and Application section
Sept 26, 2016	VN	Rev 0.3 - Removed "Preliminary" from Datasheet. Corrected marking information and updated standard frequency table (Table 7). Added pad termination finish.

For Additional Information, Please Contact

USA:

Vectron International
267 Lowell Road, Suite 102
Hudson, NH 03051
Tel: 1.888.328.7661
Fax: 1.888.329.8328

Europe:

Vectron International
Landstrasse, D-74924
Neckarbischofsheim, Germany
Tel: +49 (0) 3328.4784.17
Fax: +49 (0) 3328.4784.30

Asia:

Vectron International
68, Yin Cheng Road (C), 22nd Floor
One LuJiaZui
Pudong, Shanghai 200120, China
Tel: 86.21.6194.6886
Fax: 86.21.6194.6699

Disclaimer

Vectron International reserves the right to make changes to the product(s) and or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.