

- High power block with excellent thermal convection
- Operating temperature -40°C to +80°
- Increased shock & vibration resistance
- Ultra wide 4:1 input voltage range
- EN 50155 approval for railway applications
- Excellent efficiency up to 92%
- Constant current output characteristic for battery load applications
- Power sharing (up to 3 pcs in parallel)
- Input filter meet EN 55022, class A
- I/O isolation 3000 VDC
- Infinite capacitive load
- Under voltage lock-out circuit
- Soft start
- Input protection filter



The TEQ-300WIR Series is a family of isolated high performance dc-dc converter modules with ultra-wide 4:1 input voltage ranges which come in a rugged, sealed metal case.

These converters are suitable for a wide range of applications, but the product is designed particularly also for industrial applications where often no PCB mounting is possible but the module has to be mounted on a chassis. A very high efficiency and the overall heatsink construction allows an operating temperature up to +55°C with natural convection cooling without power derating and up to +80°C with power derating. Further features include output voltage trimming, Remote On/Off and under voltage lockout. The ultra wide input voltage range and reverse input voltage protection make these converters also an interesting solution for battery operated systems.

| Models | | | | |
|-----------------|--|----------------|---------------------|-----------------|
| Order code | Input voltage | Output voltage | Output current max. | Efficiency typ. |
| TEQ 300-4812WIR | 18 - 75 VDC* (nominal 48 VDC) | 12 VDC | 25 A | 89 % |
| TEQ 300-4815WIR | | 24 VDC | 12.5 A | 92 % |
| TEQ 300-4816WIR | | 28 VDC | 10.8 A | 91 % |
| TEQ 300-4818WIR | | 48 VDC | 6.3 A | 92 % |
| TEQ 300-7212WIR | 43 - 160 VDC (nominal 110 VDC) | 12 VDC | 25 A | 89 % |
| TEQ 300-7215WIR | | 24 VDC | 12.5 A | 91 % |
| TEQ 300-7216WIR | | 28 VDC | 10.8 A | 91 % |
| TEQ 300-7218WIR | | 48 VDC | 6.3 A | 92 % |

* below 24 Vin a derating of 3.3%/V has to be applied (see page 3)

Input Specifications

| | |
|---|--|
| Input current no load | 48 Vin models: 30 mA typ. 110 Vin models: 25 mA typ. |
| Surge voltage (1 sec. max.) | 48 Vin models: 100 V max. 110 Vin models: 185 V max. |
| Start-up voltage | 48 Vin models: 18 VDC (or lower) 110 Vin models: 43 VDC (or lower) |
| Under voltage shut down | 48 Vin models: 16.8 VDC (or lower) 110 Vin models: 36.0 VDC (or lower) |
| Conducted noise | EN55022, EN55011 class A (internal filter) |
| ESD (electrostatic discharge) | EN 61000-4-2, air ± 8 kV, contact ± 6 kV, perf. criteria A |
| Radiated immunity | EN 61000-4-3, 20 V/m, perf. criteria A |
| Fast transient / surge (without external input capacitor) | EN 61000-4-4, ± 2 kV, perf. criteria A EN 55024: EN 61000-4-5, ± 1 kV perf. criteria A EN 50155: EN 61000-4-5, ± 2 kV perf. criteria A |
| Conducted immunity | EN 61000-4-6, 10 Vrms, perf. criteria A |
| Power frequency magnetic field | EN 61000-4-8, 100 A/m, perf. criteria A |

Output Specifications

| | |
|---|--|
| Voltage adjustability | ± 20 % |
| Output power | – rated output power 300W – max. output power up to 400W (depending on temperature and duty cycle) |
| Regulation | – Input variation 0.2 % max. – Load variation 0 – 100 % 0.5 % max. |
| Temperature coefficient | ± 0.02 %/K typ. |
| Start up time (constant resistive load) | 140 ms |
| Minimum load | not required |
| Ripple and noise (20 MHz Bandwidth) | 12 VDC models: 125 mVp-p max. 24 & 28 VDC models: 250 mVp-p max. 48 VDC models: 350 mVp-p max. |
| Transient response (25% load step change) | 250 μ s typ. |
| Over voltage protection | at 125 - 140 % of Vout nom. (Latch mode) |
| Over current protection (constant current mode) | at 105 - 120 % of rated Iout max. |
| Short circuit protection | continuous, automatic recovery |
| Capacitive load | infinite |
| Load share accuracy | 10 % |

General Specifications

| | |
|--|--|
| Temperature ranges | – Operating (natural convection 20LFM, 0,1m/s) –40°C to +80°C – Storage temperature –40°C to +105°C |
| Thermal impedance (natural convection 20LFM, 0,1m/s) | 1.1 K/W |
| Derating | 2.2 %/K above 55°C |
| Over temperature protection | at 105°C typ. |
| Mechanical shock | acc. EN61373, MIL-STD-810F |
| Thermal shock | acc. MIL-STD-810F |
| Vibration | 20 - 2000Hz, 7.6grms, 3 axes (total 3 hours) |
| Humidity (non condensing) | 5 - 95 % rel H max. |

All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.

General Specifications


| | | |
|--|--|--|
| Isolation voltage (60 sec) | – Input/Case – Input/Output | 1'500 VDC 3'000 VDC |
| Isolation capacitance (input/output) | | 14'000 pF typ. |
| Isolation resistance (input/output) | | >1 Gohm |
| Reliability, calculated MTBF (MIL-HDBK-217F at +25°C, ground benign) | | 195'100 h |
| Altitude during operation | | 4000 m |
| Switching frequency | 48 Vin models: 110 Vin models: | 225 kHz typ. (PWM) 200 kHz typ. (PWM) |
| Safety standards & approvals | – CB test certificate – UL online certification E188913, OQGO2 – CSA certificate of compliance – Railway immunity – Flamability identified acc. – Certification documents (pending) | IEC/EN 62368-1, IEC/EN 60950-1 UL 60950-1 UL 508 EN 50155 EN 45545-2 www.tracopower.com/overview/teq300wir |
| Remote Sense | | 10% of Vout nom. |
| Remote On/Off | – positive logic – Off idle current: | On: 3 to 12 VDC or open circuit Off: 0 to 1.2 VDC or short circuit 3 & 4 with 5 4 mA |
| Environmental compliance | – Reach – RoHS | www.tracopower.com/products/reach-declaration.pdf RoHS directive 2011/65/EU |

Physical Specifications

| | | |
|------------------|--|---------------------------|
| Casing material | | aluminium |
| Potting material | | silicone (UL94 V-0 rated) |
| Package weight | | 900g (31.74oz) |

All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.

Outline Dimensions

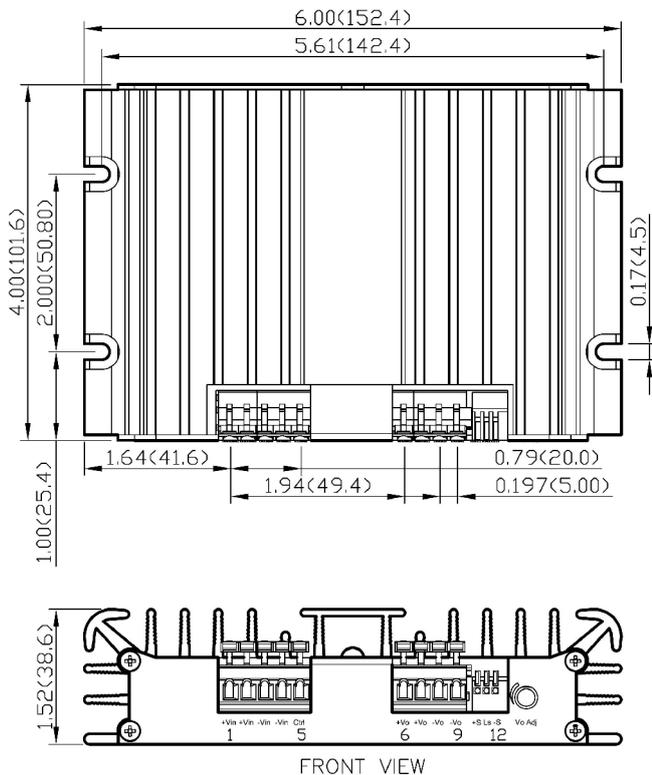

Terminal connection



| Terminal | Pin Function | Recommended Wire |
|----------|----------------|------------------|
| 1, 2 | +Vin | 12–16 AWG |
| 3, 4 | -Vin (GND) | 12–16 AWG |
| 5 | On/Off Ctrl | 12–28 AWG |
| 6, 7 | +Vout | 12–16 AWG |
| 8, 9 | -Vout | 12–16 AWG |
| 10 | +Sense* | 20–28 AWG |
| 11 | LS (Loadshare) | 20–28 AWG |
| 12 | -Sense* | 20–28 AWG |

* Sense line to be connected to the output either at the module or at the load under regard of polarity.
– Wire size shall be selected to withstand the peak current (I_{out} max. + Current limitation)

Dimensions in [Inch], () = mm
Tolerances: x.xx ±0.5 (±0.02)

Current Line Splitter

each 48 Vin module has 2 bypacked splitters included

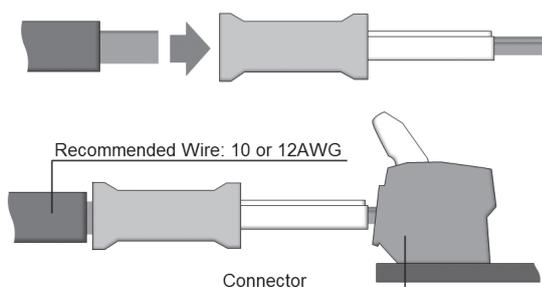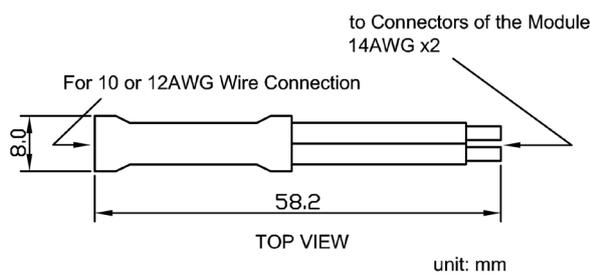

The current rating of the terminal block is 15 A/pole. It's recommended to use 2 poles in parallel if the peak output current can exceed 15 A.

Table for Input voltage vs. Input terminal specifications:

| Output power | Input voltage | Input terminal |
|------------------|---------------|----------------|
| 300 W CV mode | ≥ 23 Vin | 1 pole |
| | < 23 Vin | 2 poles |
| 400 W CC mode | ≥ 32 Vin | 1 pole |
| | < 32 Vin | 2 poles |