CY24713

Set-top Box Clock Generator with VCXO

Features


- **Integrated phase-locked loop (PLL)**
- **Low-jitter, high-accuracy outputs**
- **VCXO with analog adjust**
- **3.3V Operation**
- **8-pin SOIC**

Benefits


- **High-performance PLL tailored for Set Top Box applications**
- **Meets critical timing requirements in complex system designs**
- **Large ±150-ppm range, better linearity**
- **Meet industry standard voltage platforms**
- **Industry standard packaging saves on board space**

Part Number	Outputs	Input Frequency Range	Output Frequencies
CY24713	3	27-MHz pullable crystal input per Cypress specification	4.9152 MHz, 13.5 MHz, 27 MHz

Logic Block Diagram

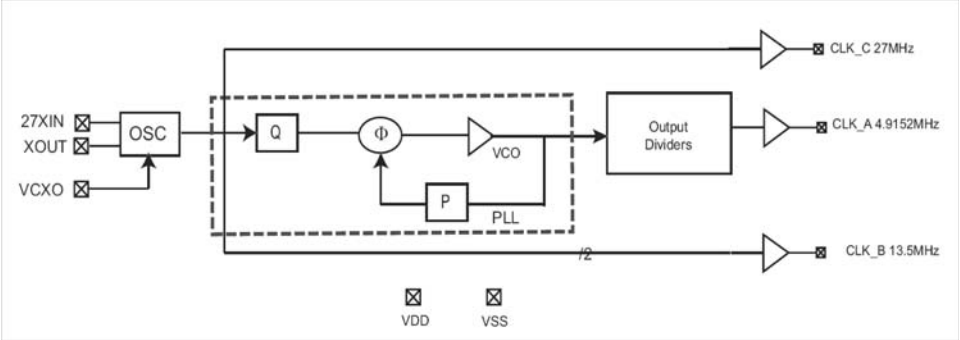

Pin Configuration

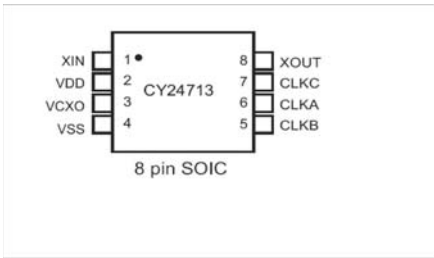

Pin Description

Name	Number	Description
XIN	1	Reference Crystal Input
VDD	2	3.3V Voltage Supply
VCXO	3	Input Analog Control for VCXO
VSS	4	Ground
CLK_B	5	13.5-MHz Clock Output
CLK_A	6	4.9152-MHz Clock Output
CLK_C	7	27-MHz Clock Output
XOUT[1]	8	Reference Crystal Output

Absolute Maximum Conditions

Parameter	Description	Min.	Max.	Unit
V_{DD}	Supply Voltage	–0.5	7.0	V
T_S	Storage Temperature[2]	–65	125	°C
T_J	Junction Temperature	–	125	°C
	Digital Inputs	V_{SS} – 0.3	V_{DD} + 0.3	V
	Digital Outputs referred to V_{DD}	V_{SS} – 0.3	V_{DD} + 0.3	V
	Electrostatic Discharge	–	2000	V
	Analog Input	–0.5	7.0	V

Pullable Crystal Specifications

Parameter	Description	Condition	Min.	Typ.	Max.	Unit
F_{NOM}	Nominal crystal frequency	Parallel resonance, fundamental mode, AT cut	–	27	–	MHz
C_{LNOM}	Nominal load capacitance		–	14	–	pF
R_1	Equivalent series resistance (ESR)	Fundamental mode	–	–	25	Ω
R_3/R_1	Ratio of third overtone mode ESR to fundamental mode ESR	Ratio used because typical R_1 values are much less than the maximum spec.	3	–	–	
DL	Crystal drive level	No external series resistor assumed	–	0.5	2.0	mW
F_{3SEPHI}	Third overtone separation from $3*F_{NOM}$	High side	300	–	–	ppm
F_{3SEPLO}	Third overtone separation from $3*F_{NOM}$	Low side	–	–	–150	ppm
C_0	Crystal shunt capacitance		–	–	7	pF
C_0/C_1	Ratio of shunt to motional capacitance		180	–	250	
C_1	Crystal motional capacitance		14.4	18	21.6	pF

Notes:
1. Float X_{OUT} if X_{IN} is externally driven.
2. Rated for 10 years

Recommended Operating Conditions

Parameter	Description	Min.	Typ.	Max.	Unit
V_{DD}	Operating Voltage	3.135	3.3	3.465	V
T_A	Ambient Temperature	0	–	70	°C
C_{LOAD}	Max. Load Capacitance	–	–	15	pF
t_{PU}	Power-up time for all VDDs to reach minimum specified voltage (power ramps must be monotonic)	0.05	–	500	ms

DC Electrical Characteristics


Parameter	Description	Conditions	Min.	Typ.	Max.	Unit
I_{OH}	Output High Current	$V_{OH} = V_{DD} – 0.5$, $V_{DD} = 3.3V$	12	24	–	mA
I_{OL}	Output Low Current	$V_{OL} = 0.5$, $V_{DD} = 3.3V$	12	24	–	mA
C_{IN}	Input Capacitance		–	–	7	pF
I_{IZ}	Input Leakage Current		–	5	–	μA
$f_{\Delta XO}$	VCXO pullability range		±150	–	–	ppm
V_{VCXO}	VCXO input range		0	–	V_{DD}	V
I_{VDD}	Supply Current		–	25	30	mA

AC Electrical Characteristics (V_{DD} = 3.3V)

Parameter[3]	Description	Conditions	Min.	Typ.	Max.	Unit
DC	Output Duty Cycle	Duty Cycle is defined in *Figure 1* 50% of V_{DD}	45	50	55	%
ER_0	Rising Edge Rate	Output Clock Edge Rate, Measured from 20% to 80% of V_{DD}, C_{LOAD} = 15 pF *Figure 2*.	0.8	1.4	–	V/ns
EF_1	Falling Edge Rate	Output Clock Edge Rate, Measured from 80% to 20% of V_{DD}, C_{LOAD} = 15 pF *Figure 2*.	0.8	1.4	–	V/ns
t_9	Clock Jitter	Peak-Peak period jitter maximum absolute jitter	–	200	250	ps
t_{10}	PLL Lock Time		–	–	3	ms

Notes:
3. Not 100% tested

Test Circuit

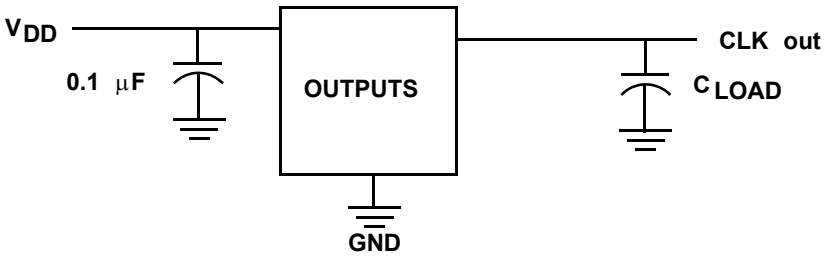

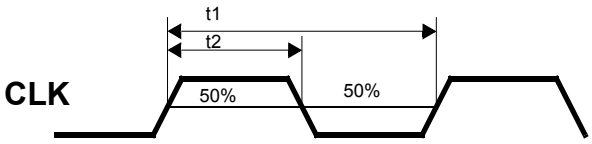


Figure 1. Duty Cycle Definition; DC = t2/t1

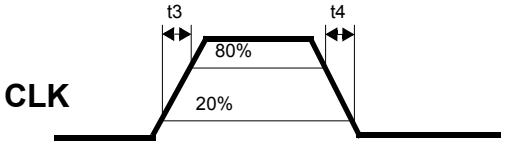



Figure 2. Rise and Fall Time Definitions: ER = 0.6 x V_{DD}/t3, EF = 0.6 x V_{DD}/t4

Ordering Information

Ordering Code	Package Type	Operating Range	Operating Voltage
CY24713SC	8-pin SOIC	Commercial	3.3V
CY24713SCT	8-pin SOIC	Commercial	3.3V
Lead-free			
CY24713SXC	8-pin SOIC	Commercial	3.3V
CY24713SXCT	8-pin SOIC	Commercial	3.3V

Package Diagram

8-lead (150-Mil) SOIC S8

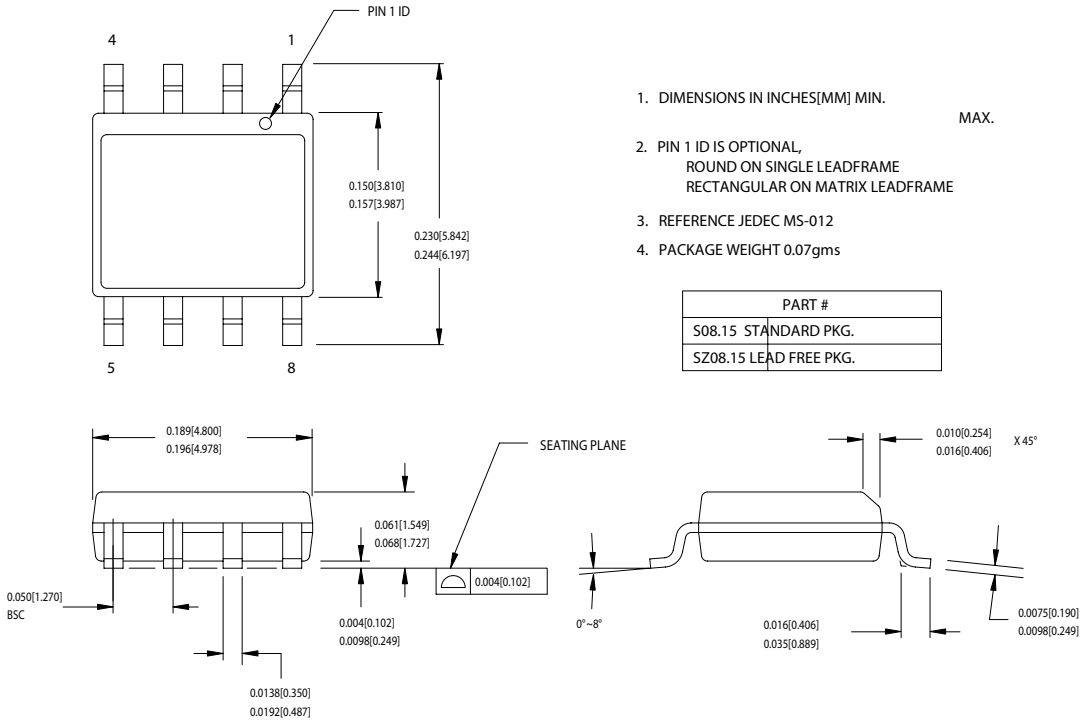

51-85066-*C

All product and company names mentioned in this document may be trademarks of their respective holders.

Document History Page

Document Title: CY24713 Set-top Box Clock Generator with VCXO Document Number: 38-07396				
REV.	**ECN No.**	**Issue Date**	**Orig. of Change**	**Description of Change**
**	333175	See ECN	RGL	New Data Sheet