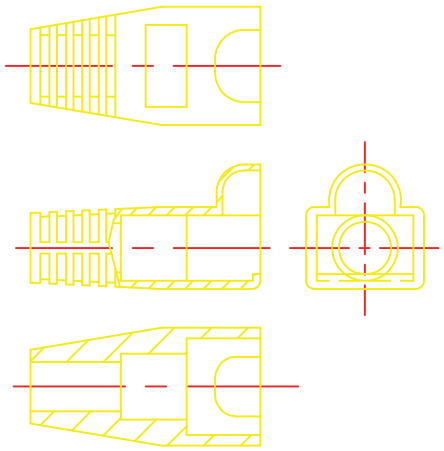

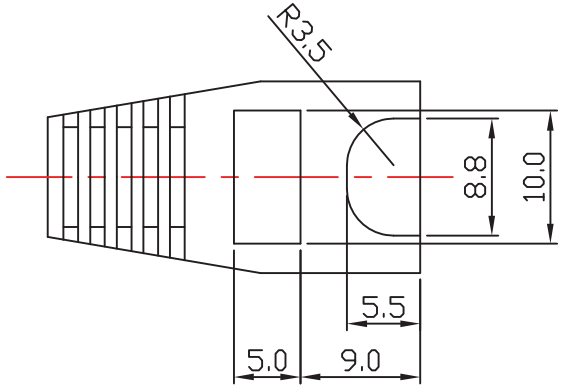

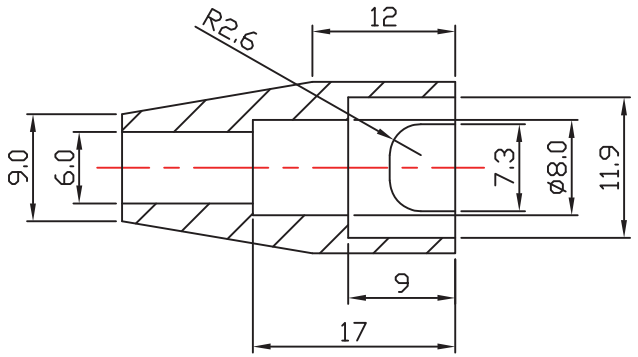

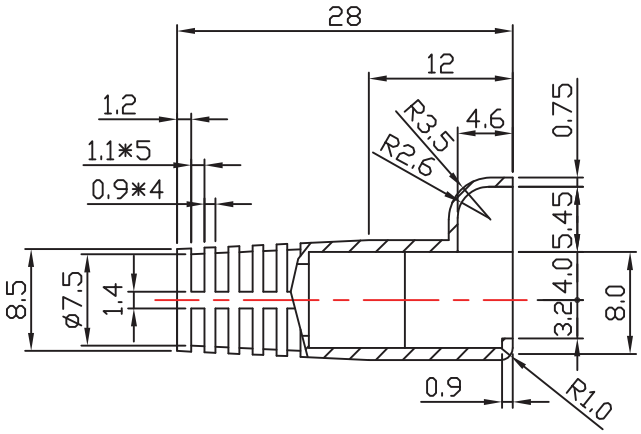

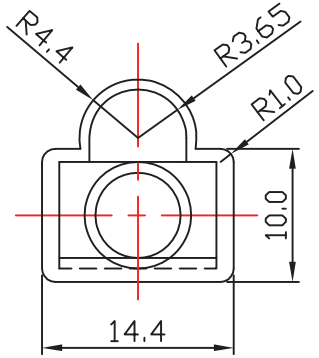

Material:

- For 8P8C RJ45 modular plugs
- Suitable for shielded and non-shielded modular plugs
- With latch protection
- Operating Temperature: -40°C ~ 70°C

***Not for Hirose type**

Unit: MM

Scale	1:1
TOLERANCE	
X.X	±0.40
X.XX	±0.25
X.XXX	±0.15
Angle	±3°

Modification	Date	Name

		Name
Drawn	11.21.11	Chappell
Approved		

RoHS Complaint

ASSMANN WSW components

Item No. **A-MOT/Y-8/8-R**

Title Kink protection boot - RJ45/8P8C modular plugs, Yellow

Drawing No. **rev00**

Replace | Sheet