

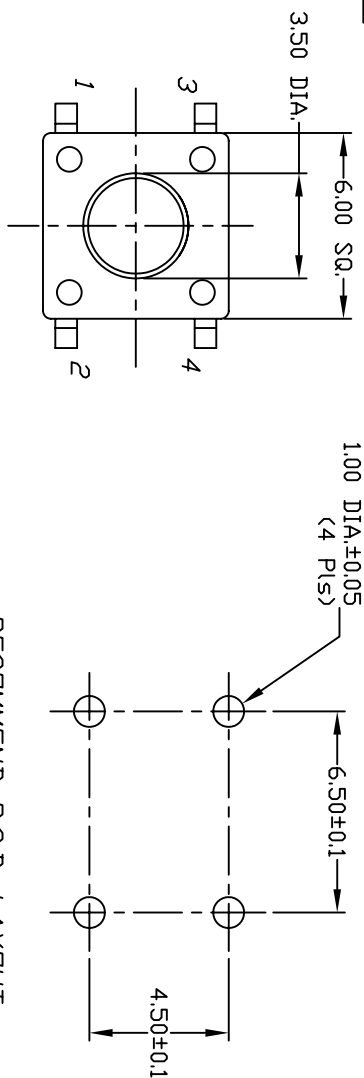




RECOMMEND P.C.B. LAYOUT

- NOTES:
1. ALL DIMENSIONS IN MM
 2. GENERAL TOLERANCE: 0.0=±0.4
0.00=±0.25
 3. TERM. NOS. FOR REF. ONLY
 4. RATING: 50mA, @12V DC
 5. TRAVEL: 0.25±0.1mm
 6. OPERATING FORCE: 250±50gf
 7. CONTACT RESISTANCE: 100m ohms Max.
 8. ELECTRICAL LIFE: 100,000 CYCLES MIN.
 9. INSULATION RESISTANCE: 100M ohms min.
 10. DIELECTRIC STRENGTH: 250V RMS MIN.
 11. OPERATING TEMP.: -20°C to -70°C
 12. DESIGNATE MAJOR DIMENSIONS.
 13. 2002/95/EC (ROHS) COMPLIANT

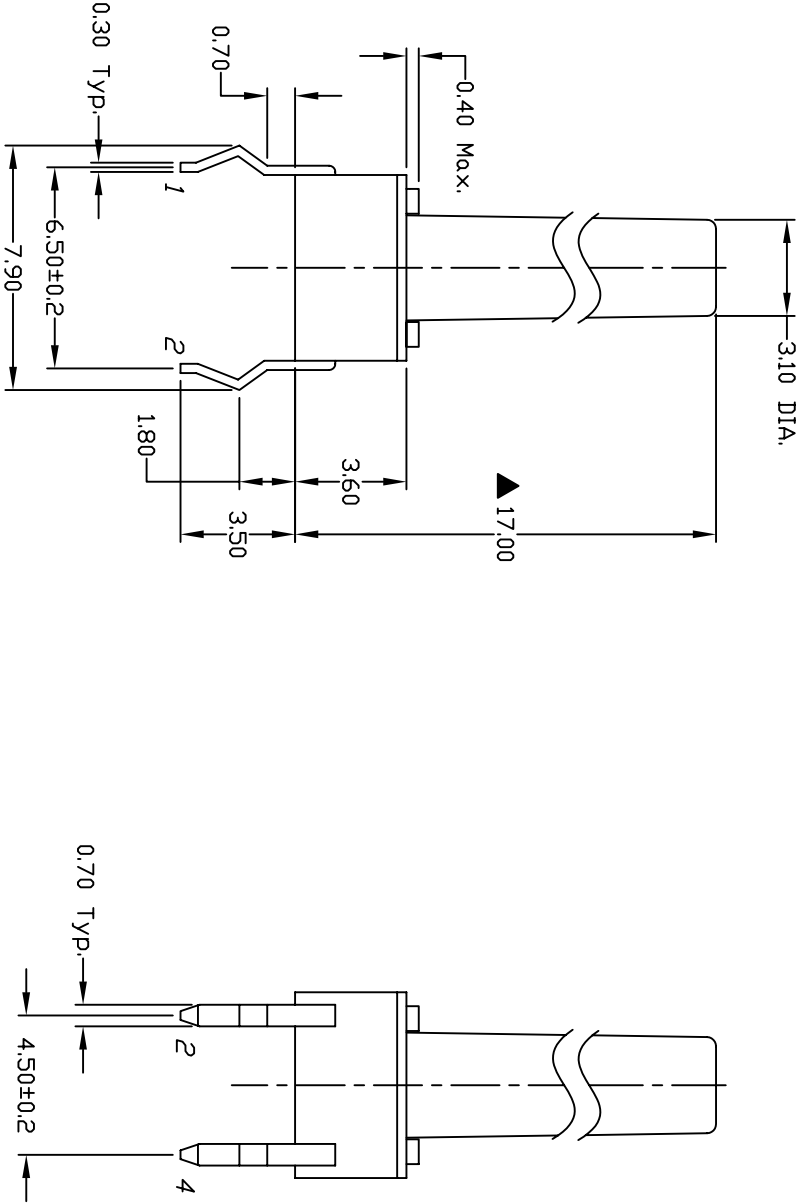

CIRCUIT: SPST
CONTACT CONFIGURATION

B	17262	FIXED DRAWING, NOTES	5/8/07	TN
A	10034	RELEASED FOR PRODUCTION		
REV.	ECN No.	DESCRIPTION	DATE	CHKD
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED				

E-SWITCH				
TITLE				
TL1105LF250Q				
SCALE	DATE	DR	DWG	REV
4:1	5/8/07	TN	P010025	B