

# 1A1 THRU 1A7

## 1.0 AMP. SILICON RECTIFIERS

Voltage Range 50 to 1000 Volts Current 1.0 Amperes


R-1

### Features

- ◆ Low forward voltage drop
- ◆ High current capability
- ◆ High reliability
- ◆ High surge current capability

### Mechanical Data

- ◆ Cases: Molded plastic
- ◆ Epoxy: UL 94V-0 rate flame retardant
- ◆ Lead: Axial leads, solderable per MIL-STD-202, Method 208 guaranteed
- ◆ Polarity: Color band denotes cathode end
- ◆ High temperature soldering guaranteed; 250°C /10 seconds/.375",(9.5mm)lead,Lengths at 5 lbs.,(2.3kg) tension
- ◆ Weight:0.20 gram

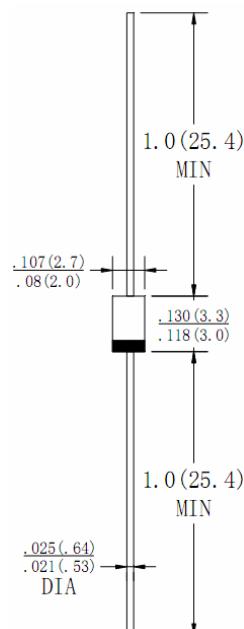

Dimensions in inches and (millimeters)

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.

Single phase,half wave,60Hz,resistiver or inductive load. For capacitive load, derate current by 20%

Type Number		1A1	1A2	1A3	1A4	1A5	1A6	1A7	UNITS
Maximum Repetitive Peak Reverse Voltage	V <sub>RRM</sub>	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	V <sub>RMS</sub>	35	70	140	280	420	560	700	V
Maximum DC blocking Voltage	V <sub>DC</sub>	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current .375"(9.5mm) Lead length @ TA=25°C	I <sub>F(AV)</sub>	1.0						A	
Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load (JEDEC method)	I <sub>FSM</sub>	25						A	
Maximum Instantaneous Forward Voltage @1.0A	V <sub>F</sub>	1.0						V	
Maximum DC Reverse Current @ TA=25°C at rated DC blocking voltage @ TA=100°C	I <sub>R</sub>	5.0 50.0						µA	
Typical Thermal Resistance (Note )	R <sub>θJA</sub>	50						°C/W	
Operating Temperature Range	T <sub>J</sub>	-65 to +125						°C	
Storage Temperature Range	T <sub>STG</sub>	-65 to +150						°C	

**NOTE:** : 1. Thermal resistance from junction to ambient at 0.375" (9.5mm) lead length.

## 1A1 THRU 1A7

### RATING AND CHARACTERISTIC CURVES

FIG.1-MAXIMUM NONO-REPETITIVE FORWARD SURGE CURRENT PER BRIDGE ELEMENT

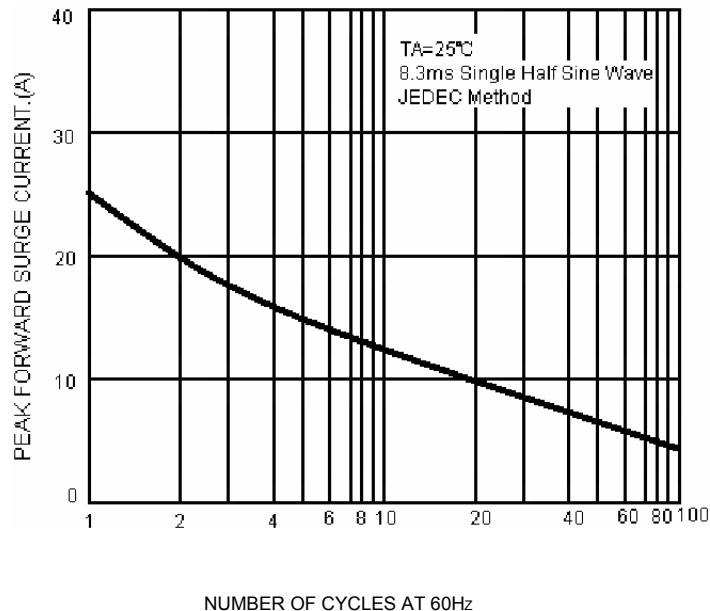


FIG. 2-MAXIMUM FORWARD CURRENT DERATING CURVE

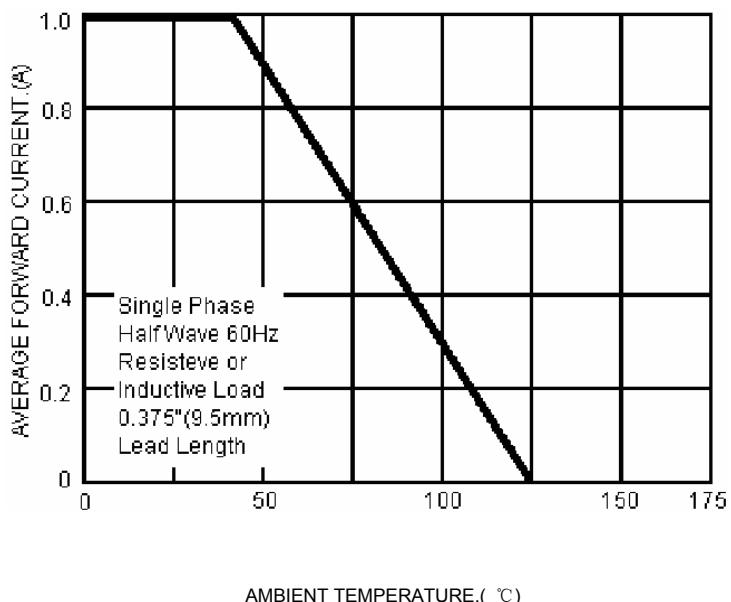


FIG. 3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS PER BRIDGE ELEMENT


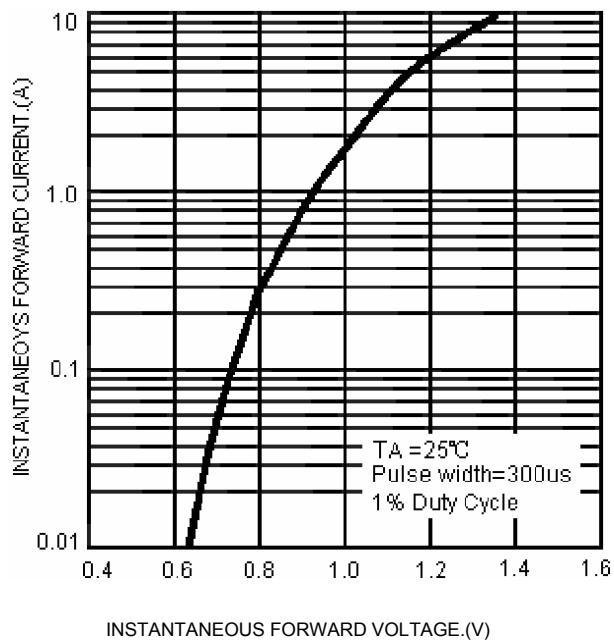


FIG. 4-TYPICAL REVERSE CHARACTERISTICS PER BRIDGE ELEMENT

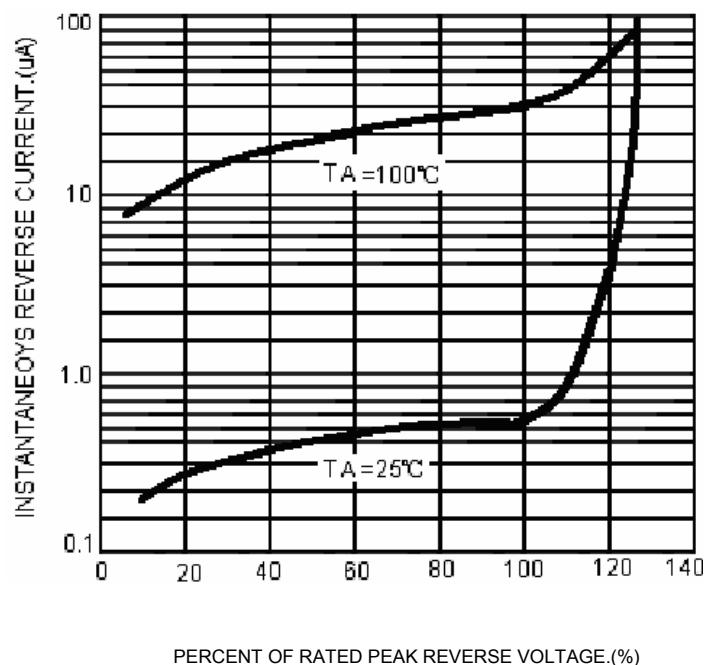

Note: Specifications are subject to change without notice.