
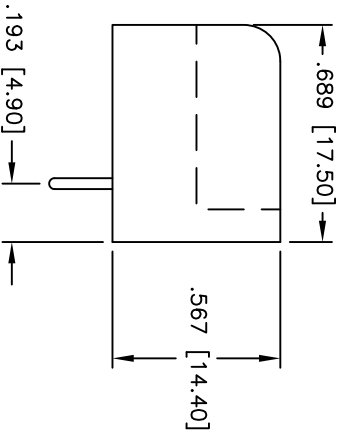
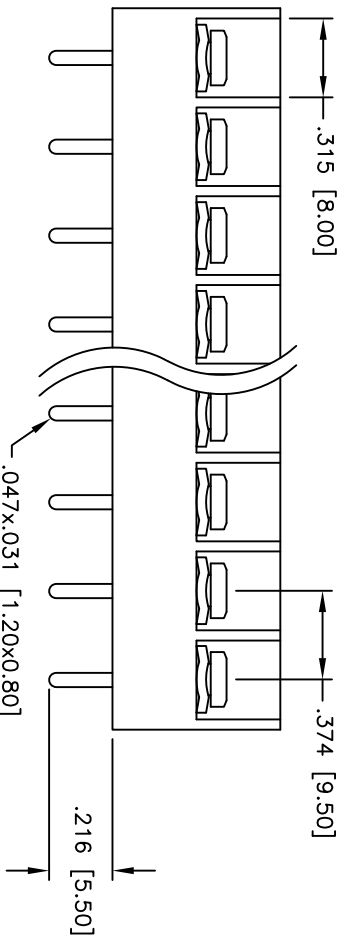


Rev	AWO #	Description	Date	Appr
-		RELEASED	6/8/05	

APPROVED: _____
 DATE: _____ TITLE: _____

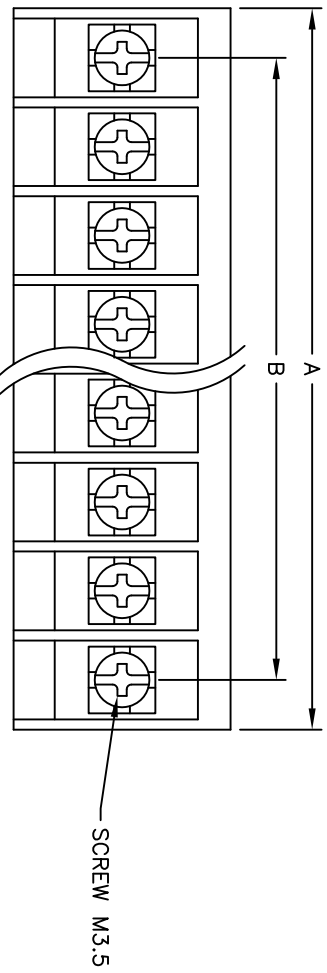

SPECIFICATIONS:

- Material: Polyamide, rated UL 94V-0
- Insulator color: Black
- Plating: Contacts: Brass, Tin plated; Screws: M3.5, Steel, Nickel plated; Hardware: Brass, Tin plated
- Electrical: Operating voltage: 300 VAC max.; Current rating: 25 Amps max.; Insulation resistance: 1,000 Mohms min. @ 500V DC; Dielectric withstanding voltage: 2,000 VAC for 1 minute
- Mechanical: Wire range: 22 - 12 AWG; Screw Torque: 12kg /cm; Operating temperature: -40°C to +105°C; Environmental: Lead free, RoHS compliant

Positions: 2 thru 32
 A = .374 [9.50] x No. of Positions + .059 [1.50]
 B = .374 [9.50] x No. of Spaces

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLDS
.X ± .10	ØXX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXXX ± .010
APPROVALS	DATE
DRAWN	SS
CHECKED	
APPROVED	

ADAM TECH
 909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .374 [9.50] CLOSED SIDE BARRIER BLOCK
 VERTICAL, PCB TAILS, BARRIER ENDS

SIZE: X PART NO.: TBG-XX-01-B

REF: S00035T	SCALE: NTS	SHEET 1 OF 1
--------------	------------	--------------