
DUAL HIGH CURRENT OPERATIONAL AMPLIFIER

■ GENERAL DESCRIPTION

The NJM4556A integrated circuit is a high-gain, high output current dual operational amplifier capable of driving ±70mA into 150 Ω loads (±10.5V output voltage), and operating low supply voltage (V^+/V^-=±2V~).

The NJM4556A combines many of the fetures of the popular NJM4558 as well as having the capability of driving 150Ω loads. In addition, the wide band-width, low noise, high slew rate and low distortion of the NJM4556A make it ideal for many audio, telecommunications and instrumentation applications.


■ PACKAGE OUTLINE




NJM4556AD



NJM4556AM



NJM4556AL




NJM4556AV


■ FEATURES

- Operating Voltage (±2V~±18V)
- High Output Current (Io=70mA)
- Slew Rate (3V/μs typ.)
- Gain Band Width Product (8MHz typ.)
- Package Outline DIP8, DMP8, SIP8, SSOP8
- Bipolar Technology

■ PIN CONFIGURATION




NJM4556AD
NJM4556AM
NJM4556AV



NJM4556AL

PIN FUNCTION
1. A OUTPUT
2. A−INPUT
3. A+INPUT
4. V⁻
5. B+INPUT
6. B−INPUT
7. B OUTPUT
8. V⁺

■ EQUIVALENT CIRCUIT (1/2 Shown)

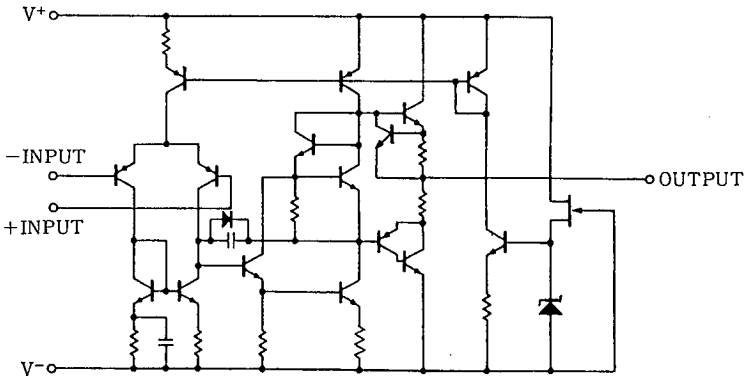

■ ABSOLUTE MAXIMUM RATINGS

(Ta=25℃)

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V^+/V^-	±18	V
Differential Input Voltage	V_{ID}	±30	V
Input Voltage	V_{IC}	±15 (note)	V
Power Dissipation	P_D	(DIP8) 700	mW
		(DMP8) 300	mW
		(SSOP8) 250	mW
		(SIP8) 800	mW
Operating Temperature Range	Topr	−20～+75	℃
Storage Temperature Range	Tstg	−40～+125	℃

(note) For supply voltage less than ±15V, the absolute maximum input voltage is equal to the supply voltage.

■ ELECTRICAL CHARACTERISTICS (NJM4556AD/NJM4556AS)

(V^+/V^-=±15V Ta=25℃)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Input Offset Voltage	V_{IO}	$R_S \leqq 10k\Omega$	—	0.5	6.0	mV
Input Offset Current	I_{IO}		—	5	60	nA
Input Bias Current	I_B		—	50	500	nA
Input Resistance	R_{IN}		0.3	5	—	MΩ
Large Signal Voltage Gain	A_V	$R_L \geqq 2k\Omega$, V_O=±10V	86	100	—	dB
Maximum Output Voltage Swing 1	V_{OM1}	$R_L \geqq 2k\Omega$	±12	±13.5	—	V
Maximum Output Voltage Swing 2	V_{OM2}	$R_L \geqq 150\Omega$	±10.5	±11	—	V
Input Common Mode Voltage Range	V_{ICM}		±13.5	±14	—	V
Common Mode Rejection Ratio	CMR	$R_S \leqq 10k\Omega$	70	90	—	dB
Supply Voltage Rejection Ratio	SVR	$R_S \leqq 10k\Omega$	76.5	90	—	dB
Operating Current	I_{CC}		—	9	12	mA
Slew Rate	SR		—	3	—	V/μS
Gain Bandwidth Product	GB		—	8	—	MHz


■ ELECTRICAL CHARACTERISTICS (NJM4556AM/NJM4556AV)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Input Offset Voltage	V_{IO}	$R_s \leqq 10k\Omega$	—	0.5	6.0	mV
Input Offset Current	I_{IO}		—	5	60	nA
Input Bias Current	I_B		—	50	500	nA
Large Signal Voltage Gain	A_V	$R_L \geqq 2k\Omega$, V_O=±10V	86	100	—	dB
Maximum Output Voltage Swing 1	V_{OM1}	V_{IN}^+=4V, V_{IN}^-=3V, V^+=9V Isource=40mA	7.5	—	—	V
Maximum Output Voltage Swing 2	V_{OM2}	V_{IN}^+=3V, V_{IN}^-=4V, V^+=9V Isink=40mA	—	—	2.1	V
Input Common Mode Voltage Range 1	$V_{ICM}1$	V^+=9V, V_{IL}	—	—	1.5	V
Input Common Mode Voltage Range 2	$V_{ICM}2$	V^+=9V, V_{IH}	8	—	—	V
Common Mode Rejection Ratio	CMR	$R_S \leqq 10k\Omega$	70	90	—	dB
Supply Voltage Rejection Ratio	SVR	$R_S \leqq 10k\Omega$	76.5	90	—	dB
Supply Current	I_{CC}	V^+=9V	—	8	12	mA
Slew Rate	SR		—	3	—	V/μS
Gain Bandwith Product	GB		—	8	—	MHz

■ TYPICAL CHARACTERISTICS


Maximum Output Voltage Swing vs. Frequency

($V^+/V^-=\pm15V$, $R_L=2k\Omega$, $Ta=25°C$)

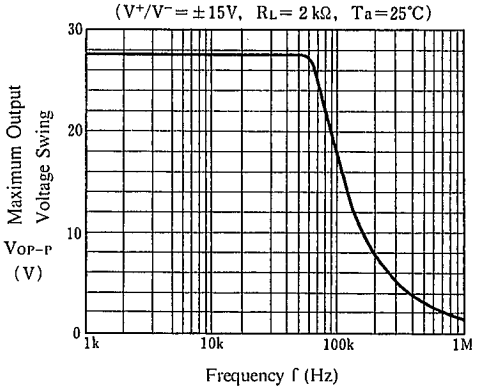


Maximum Output Voltage Swing vs. Frequency

($V^+/V^-=\pm15V$, $R_L=150\Omega$, $Ta=25°C$)

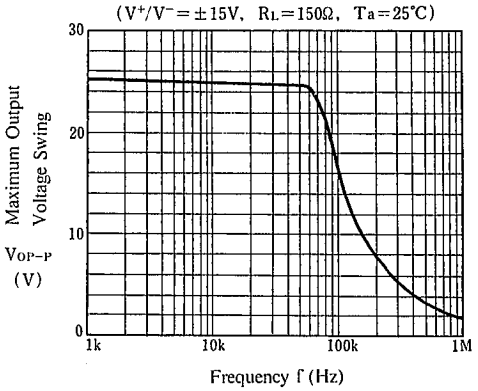


Maximum Output Voltage Swing vs. Output Current

($V^+/V^-=\pm15V$, $Ta=25°C$)

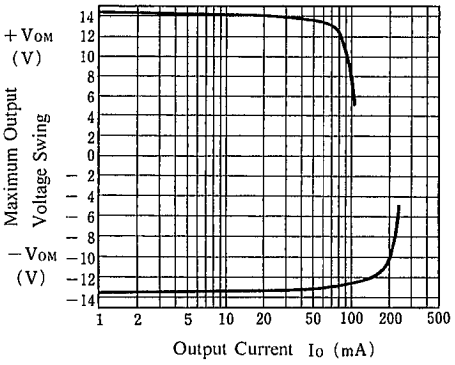


Voltage Gain, Phase Shift vs. Frequency

($V^+/V^-=\pm15V$, $R_L=2k\Omega$, 40dBAmp, $Ta=25°C$)

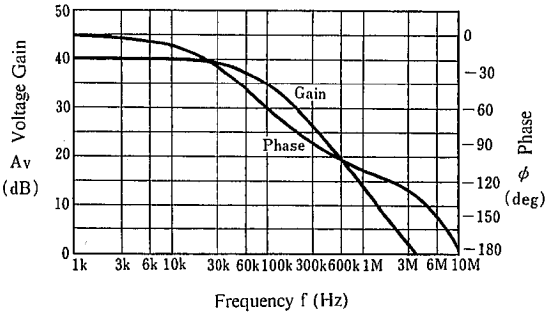


Maximum Output Voltage Swing vs. Operating Voltage

($R_L=150\Omega$, $Ta=25°C$)

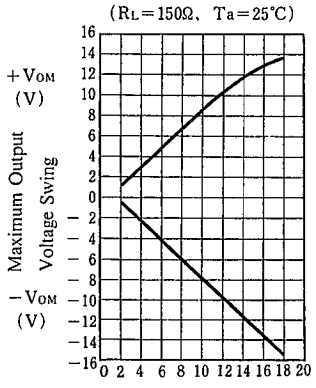

Total Harmonic Distortion vs. Output Voltage


($V^+/V^-=\pm15V$, $R_L=200\Omega$, $G_{ain}=30dB$, $Ta=25°C$)

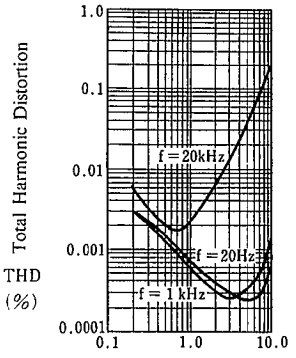

■ TYPICAL CHARACTERISTICS


Maximum Output Voltage Swing vs. Temperature

($V^+/V^-=\pm15V$, $R_L=2\,k\Omega$)

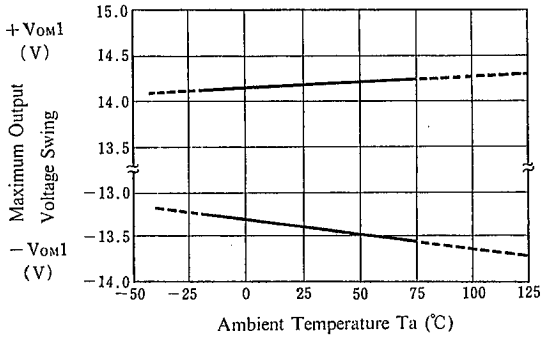

Maximum Output Voltage Swing vs. Temperature


($V^+/V^-=\pm15V$, $R_L=150\Omega$)

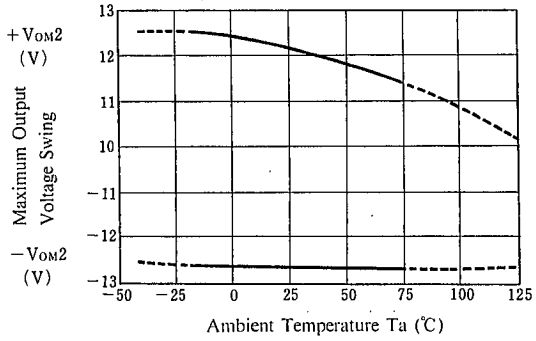

4


Input Offset Voltage vs. Temperature

($V^+/V^-=\pm15V$)

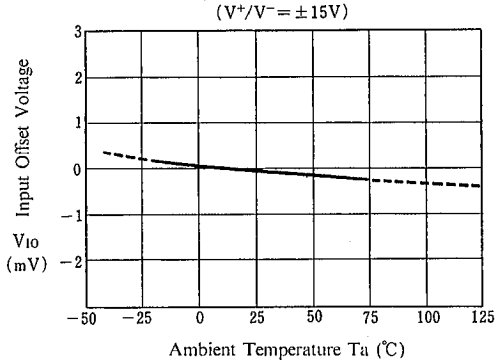


Supply Current vs. Temperature

($V^+/V^-=\pm15V$)

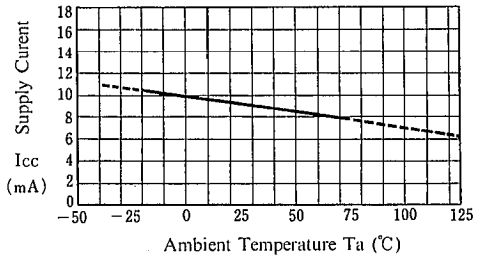


Equivalent Input Noise Voltage vs. Frequency

($V^-/V^+=\pm15V$, $R_S=100\Omega$, $A_V=40dB$, $Ta=25℃$)

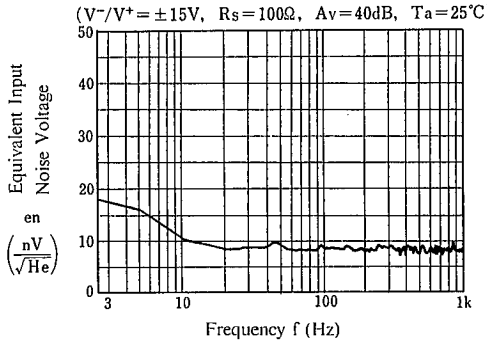

Operating Current vs. Operating Voltage

($Ta=25℃$)



MEMO

[CAUTION]
The specifications on this databook are only given for information , without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.