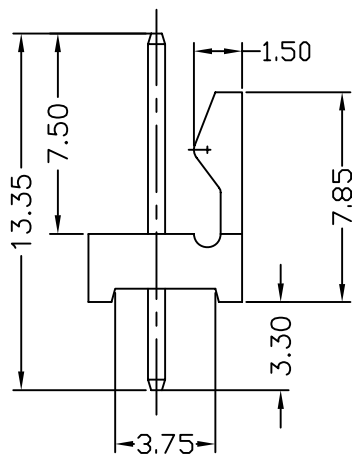


Recommended P.C.B Layout




MATERIAL



Insulator : NY66 + 30% Glass fiber
Contact Pin : Brass

SPECIFICATION

Current Rate : 2.5 AMP
Dielectric voltage : 250V AC for one minute
Insulation Resistance : 1000MΩMin.
Contact Resistance : 20mΩMax
Operation Temperature : -25°C to + 85°C

744-8 1-04 T W 30
1 2 3 4 5

1. 8: Green Product
2. No. of contacts per row
3. G: Gold flash
S: Selective
T: Tin plated
4. W: White Insulator 
F: Brown Insulator
B: Black Insulator
5. Pinrex internal code.

				TOLERANCE		 OLD PART NO.		TITLE		 频锐科技股份有限公司 PINREX TECHNOLOGY CORP.
C	REVISE DESCRIPTION	2008/12/12	.0 =±.50 .00 =±.30 .000 =±.XXX	UNITS : mm		DRAWER <i>Age</i>		2.54mm WIRE TO BOARD HEADER DIP 180° TYPE		
B	REVISE ILLUSTRATION	2008/10/28	.0000=±.	SCALE NONE	SIZE A4	SHEET 1 OF 1	REV. C	APP'D	NEW PART NO. 744-81-04TW30	DRAW NO. 744-81-04TW30(C版)
A	RELEASE	2007/10/04	ANG.=±3'							
REV.	DESCRIPTION	DATE								