

SMDA63 SERIES



63W Desk Top Power Supply for Medical Equipment

- Wide Input Voltage 90 to 264 VAC, 47 to 63Hz
- IEC-320-C14 input inlet
- Output Voltage Available From 5VDC Thru 36VDC
- Single Output
- Input Surge Current, Over Voltage, Over Load and Output Voltage protection.
- Class I Insulation

3 Year Warranty

Approvals:        

Single Output

Product Number	Output Voltage	Max. Output Current	Total Regulation	Maximum Output Power
SMDA63-S02	5 VDC	9.00 A	7%	45W
SMDA63-S03	7 VDC	7.85 A	7%	55W
SMDA63-S04 *	9 VDC	6.44 A	5%	58W
SMDA63-S05 *	12 VDC	5.25 A	5%	63W
SMDA63-S06 *	15 VDC	4.20 A	5%	63W
SMDA63-S07 *	18 VDC	3.50 A	5%	63W
SMDA63-S08 *	24 VDC	2.62 A	3%	63W
SMDA63-S09 *	30 VDC	2.10 A	3%	63W
SMDA63-S10 *	36 VDC	1.75 A	3%	63W

Mark "*" means approved by CEC level V and the output cable must be using as below.

Total Regulation is guaranteed by below configuration

S02, S03: AWG16/5C/4FT output cable)

S04, S05: AWG16/2C/4FT output cable)

S06, S07: AWG16/2C/4FT output cable)

S08-S10: AWG18/2C/6FT output cable)

Electrical Characteristics

Parameter	Test Conditions	Min.	Typ.	Max.	Unit
Input Voltage	Operating Voltage	90		264	VAC
Input Frequency		47		63	Hz
Output Power Range	Vin= 90 to 264 VAC	0		63	W
Input Current (Low Line)	Io=Full load, Vin=115 VAC			1.62	A
Input Current (High Line)	Io=Full load, Vin= 230 VAC			0.72	A
Low Line Inrush Current	Io=Full load, 25°C, Cool start, Vin=115VAC		28	38	A
High Line Inrush Current	Io=Full load, 25°C, Cool start, Vin=230 VAC		45	55	A
Efficiency	Io=Full Load, Vin=230VAC	77	85	88	%
Line Regulation	Io=Full Load		0.5	1	%
Load Regulation	Vin=230VAC		3	7	%
Over Voltage Protection		112		132	%
Over Current Protection		110		150	%
Transient Response	Io=Full Load to Half Load, Vin=100VAC			4	mS
Hold-Up Time	Io=Full Load, Vin=110VAC	16			mS
Start Up Time	Io=Full Load, Vin=100VAC	0.3	1	2	S
Ripple & Noise (Peak to Peak)	Full Load, Vin=90VAC		0.5	1	%
Safety Ground Leakage Current	Io= Full Load, Vin=240VAC			0.1	mA
No-Load Power Consumption	No load, Vin=240VAC	0.3	0.4	0.5	W
Temperature Coefficient	All output	-0.04		0.04	%/°C


Conditions

Parameter	Test Conditions	Min.	Typ.	Max.	Unit
Operating Temperature		0	50	70	°C
Storage Temperature		-40		85	°C
Relative Humidity		5		95	%
Operation temperature at 25°C, calculated per MIL-HDBK-217F		0.1M			Hrs
Derate linearly from 100% load at 50°C to 50% load at 70°C					

Approvals and Compliances

Parameter	Test Conditions	Min.	Unit
Dielectric Withstanding Voltage for Primary to secondary	Primary to secondary	5656	VDC
Dielectric Withstanding Voltage for Primary to Ground	Primary to ground	2828	VDC
Isolation Resistance	Test Voltage = 500VDC	50	MΩ
EMI requirements for CISPR-11	Vin=220VAC	B	CLASS
EMI requirements for FCC PART-18	Vin=110VAC	B	CLASS

Mechanical and PIN out

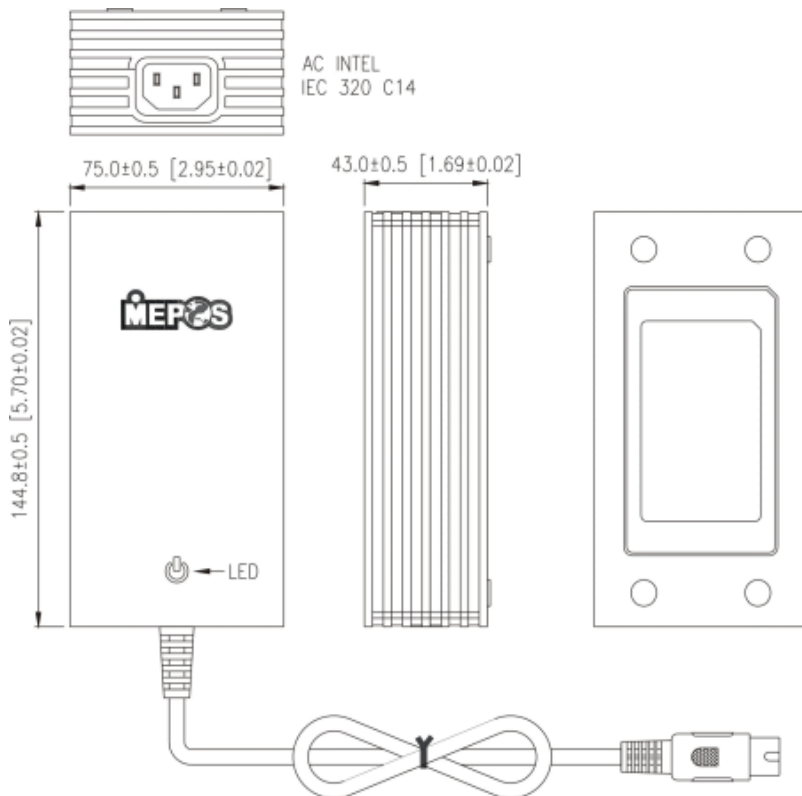

Note:

1. Dimensions are shown in mm & inch
2. Weight: approx. 510-560g (Exclude the input cord)
3. Optional output connector.