

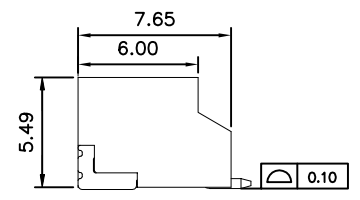
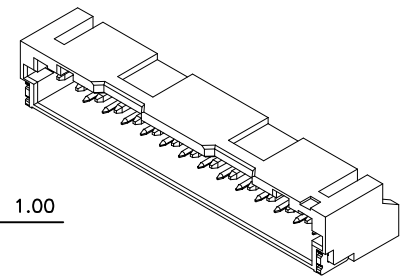
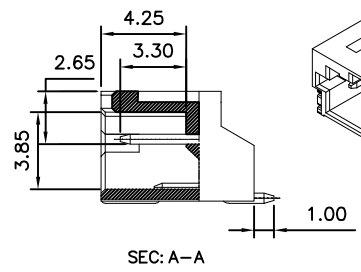
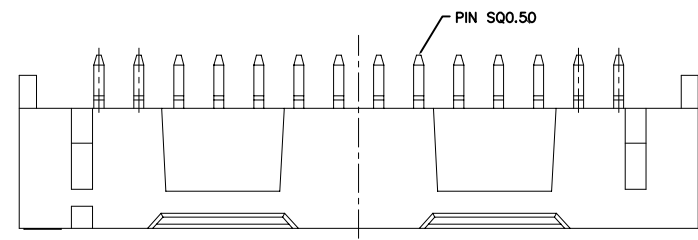
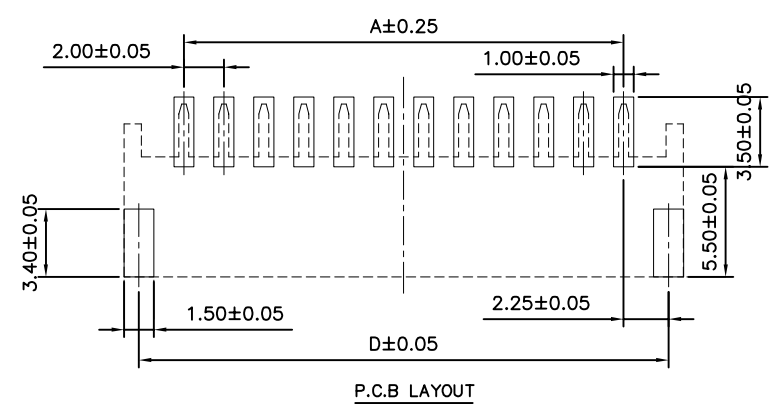
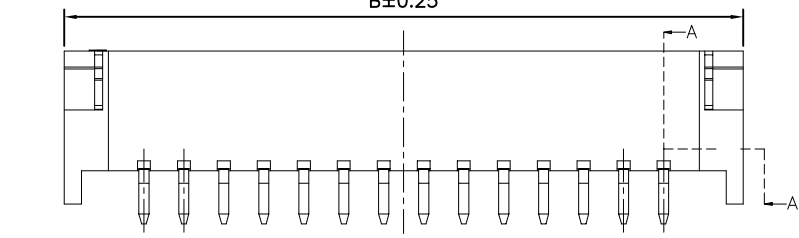


修 订	标 记	修 改 描 要	签 名	日 期
REV	MARK	REVISION DESCRIPTION	SIGNATURE	DATE
AO		NEW DRG		2016-03-12

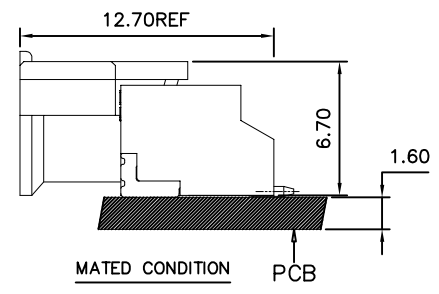

**SPECIFICATIONS**  
 Current Rating: 2A AC,DC  
 Voltage Rating: 100V AC,DC  
 Temperature Range: -25°C ~ +85°C  
 Contact Resistance: 10mΩ Max.  
 Insulation Resistance: 1000MΩ Min.  
 Withstanding Voltage: 800V AC/minute  
 Pin Material: Brass/Gold-flash  
 Solder Tabs: Brass/Gold-flash  
 Material: LCP,UL94V-0  
 Color: Natural(Beige)

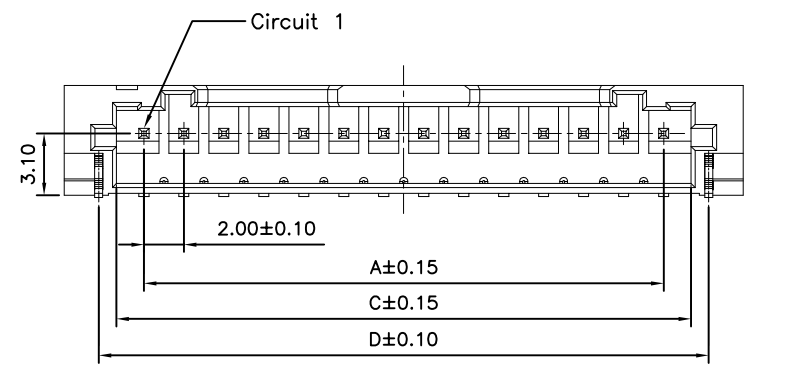

Circuit No.	Dimensions			
	A	B	C	D
12P	22.00	<b>30.00</b>	24.75	26.52
14P	26.00	<b>34.00</b>	28.75	30.52

		<b>深圳市华德共创科技有限公司</b> Shenzhen Huade co-create Technology Co.,LTD 电话: 0755-23304126 传真: 0755-29940187			
		TITLE: <b>PHA2.0卧贴</b> 产品名称:		PART NO: <b>C2022WR-nP</b> 产品编号:	
X.X ±0.30 X.XX ±0.20 X.XXX ±0.10	X.X* ±3* X.XX* ±2* X.XXX* ±1*	APPD: 核准: CHECK: 王建业 DRAW: 黄艳兰	DATE: 2016-03-12	SCALE: 1:1 UNIT: mm	CODE NUMBER: A001