Silicon PNP Power Transistors 2SA1635

DESCRIPTION

- With TO-220Fa package
- Low collector saturation voltage
- Complement to type 2SC4008

APPLICATIONS

- For medium speed,electrical supply and DC-DC converter applications

PINNING

PIN	DESCRIPTION
1	Emitter
2	Collector
3	Base

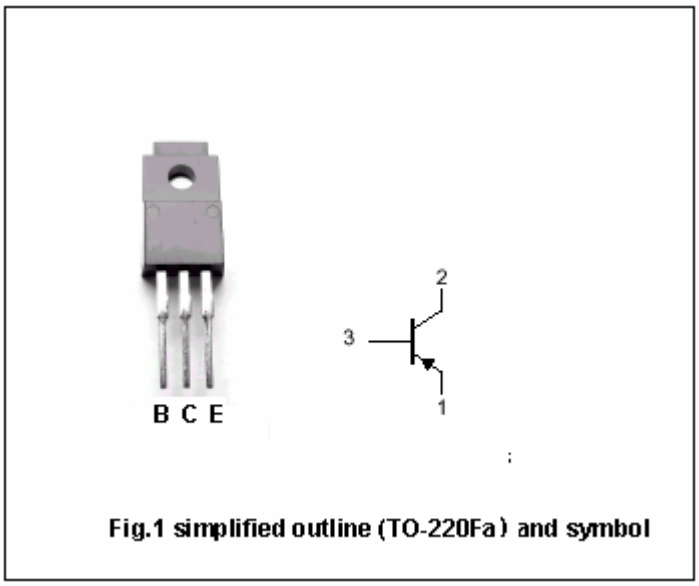


Fig.1 simplified outline (TO-220Fa) and symbol

Absolute maximum ratings(Ta=25℃)

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
V_{CBO}	Collector-base voltage	Open emitter	-80	V
V_{CEO}	Collector-emitter voltage	Open base	-80	V
V_{EBO}	Emitter-base voltage	Open collector	-5	V
I_C	Collector current		-4	A
P_C	Collector power dissipation	T_C=25℃	30	W
T_j	Junction temperature		150	℃
T_{stg}	Storage temperature		-55~150	℃

Silicon PNP Power Transistors 2SA1635

CHARACTERISTICS

Tj=25℃ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
$V_{(BR)CEO}$	Collector-emitter breakdown voltage	I_C=-1mA ,I_B=0	-80			V
$V_{(BR)EBO}$	Emitter-base breakdown voltage	I_E=-0.1mA ,I_C=0	-5			V
V_{CEsat}	Collector-emitter saturation voltage	I_C=-2A; I_B=-0.2A			-1.5	V
$V_{BE\ sat}$	Base-emitter saturation voltage	I_C=-2A; I_B=-0.2A			-1.5	V
I_{CBO}	Collector cut-off current	V_{CB}=-80V; I_E=0			-10	μA
I_{EBO}	Emitter cut-off current	V_{EB}=-5V; I_C=0			-10	μA
h_{FE}	DC current gain	I_C=-1A ; V_{CE}=-4V	60		320	
C_{OB}	Output capacitance	I_E=0 ; V_{CB}=-10V;f=1MHz		80		pF
f_T	Transition frequency	I_C=-0.5A ; V_{CE}=-12V		12		MHz

◆ **h_{FE} Classifications**

D	E	F
60-120	100-200	160-320

PACKAGE OUTLINE

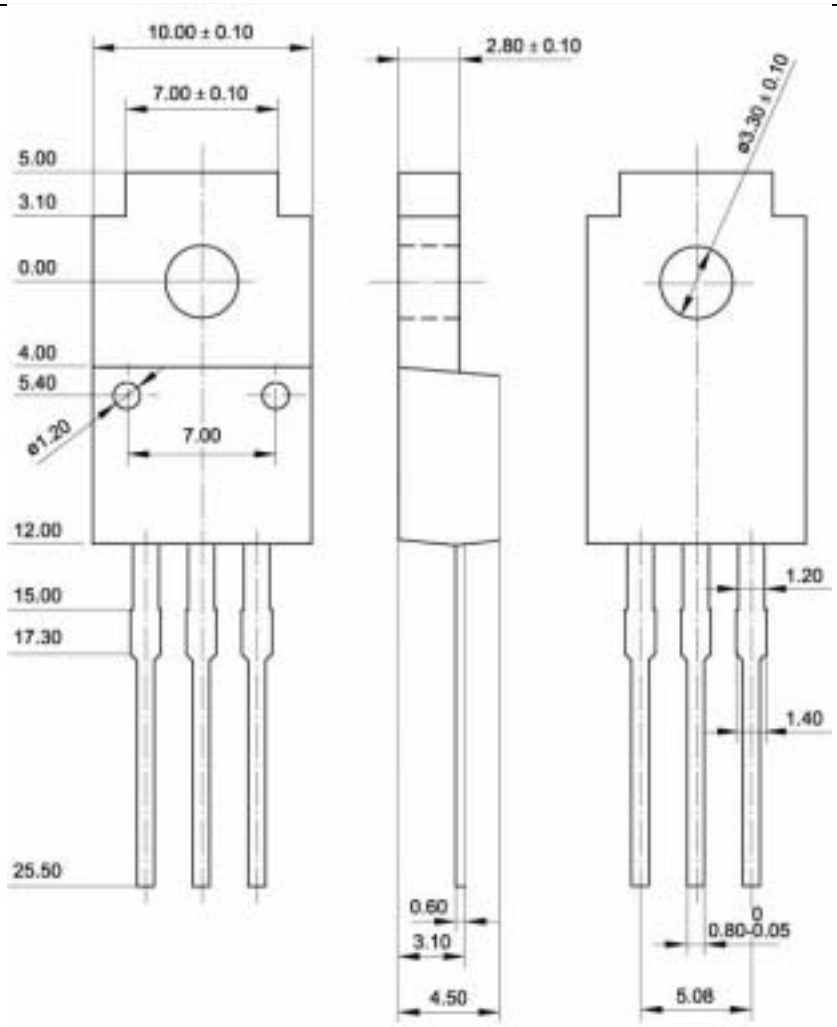


Fig.2 Outline dimensions (unindicated tolerance:±0.15 mm)