

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.



© COPYRIGHT - By -

LOC  
HB

DIST  
-

REVISIONS



P	LTR	DESCRIPTION	DATE	DWN	APVD
D		CHANGE LOGO, VENT, ADD LINE IDENTIFIER, COC, PLATING THICKNESS ECO-12-005725	21-AUG-12	D.L	BH.Y

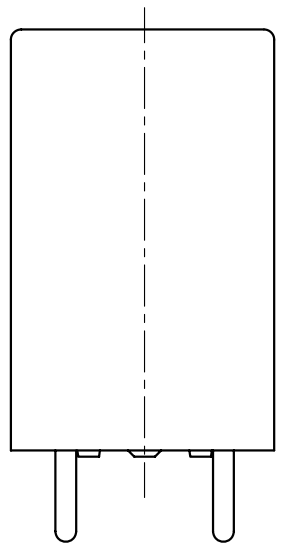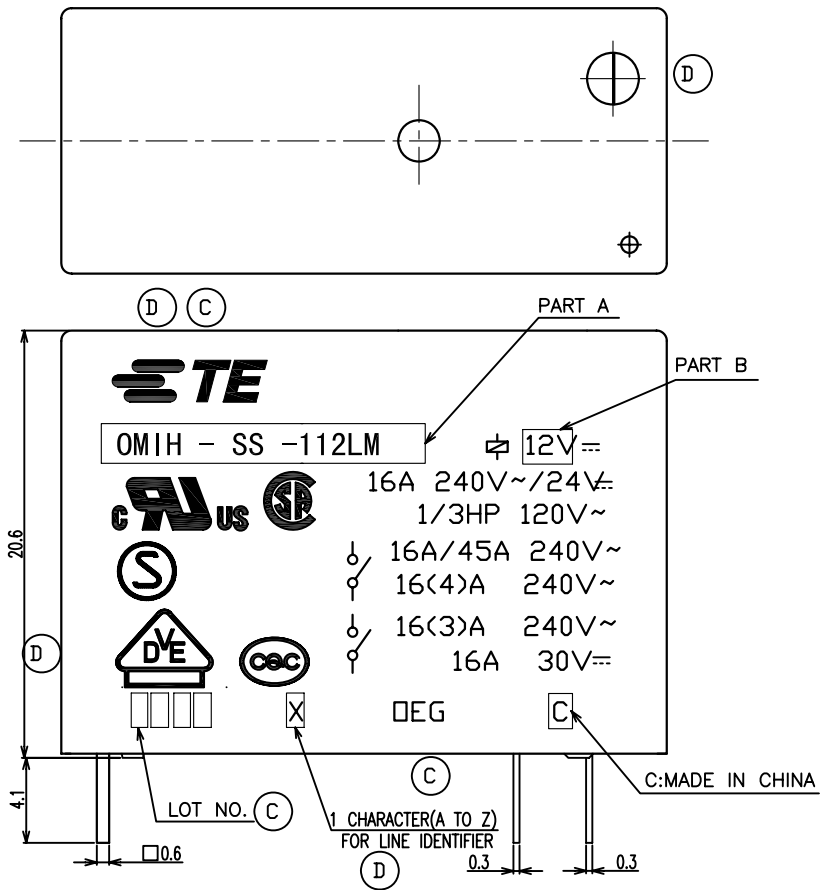

CONNECTION DIAGRAM (BOTTOM VIEW)



DRILLING DIAGRAM(2/1) (BOTTOM VIEW)

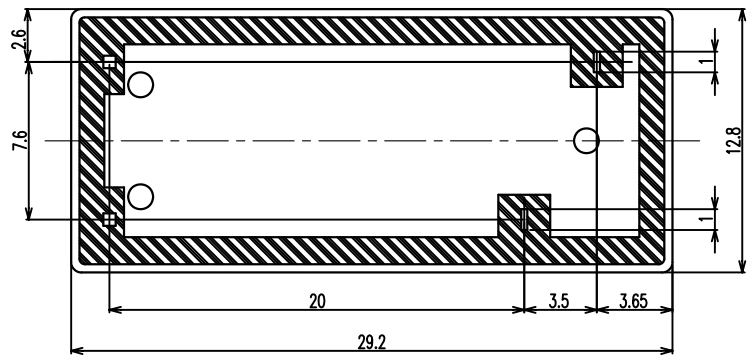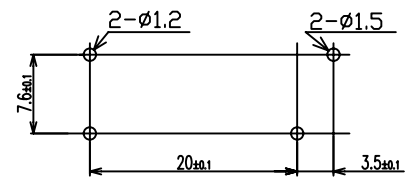

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN Y.Xiao	-	
		CHK N.Funayama	-	
		APVD CH.HSU	-	
		PRODUCT SPEC	-	
		APPLICATION SPEC	-	
		WEIGHT	-	
		CUSTOMER DRAWING	-	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		
		0 PLC	± -	
		1 PLC	± -	
		2 PLC	± -	
		3 PLC	± -	
		4 PLC ANGLES	± -	
MATERIAL	FINISH	SIZE	CAGE CODE	DRAWING NO
-	-	A3	00779	C=2-1419153-1
		RESTRICTED TO	-	
		SCALE	SHEET	REV
		4:1	1 of 2	D

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
HB	-	P	LTR	DESCRIPTION	DATE	DWN	APVD

OMIH-SH-124DM	7-1440000-3	OMIH-SH-124DM	24V
OMIH-SH-112LM	1461009-1	OMIH-SH-112LM	12V
OMIH-SH-112DM	1461022-1	OMIH-SH-112DM	12V
OMIH-SS-106DM	1461022-9	OMIH-SS-106DM	6V
OMIH-SS-105DM	1461022-5	OMIH-SS-105DM	5V
OMIH-SS-148LM	9-1419121-2	OMIH-SS-148LM	48V
OMIH-SS-148LM	2-1419145-2	OMIH-SS-148LM	48V
OMIH-SS-148LM	9-1440000-4	OMIH-SS-148LM	48V
OMIH-SS-148DM	9-1440000-2	OMIH-SS-148DM	48V
OMIH-SS-124LM	2-1419153-2	OMIH-SS-124LM	24V
OMIH-SS-124DM	8-1440000-9	OMIH-SS-124DM	24V
OMIH-SS-118DM	8-1440000-7	OMIH-SS-118DM	18V
OMIH-SS-112LM	8-1440000-6	OMIH-SS-112LM	12V
OMIH-SS-112DM	8-1440000-4	OMIH-SS-112DM	12V
OMIH-SS-109LM	8-1440000-2	OMIH-SS-109LM	9V
OMIH-SS-109DM	8-1440000-0	OMIH-SS-109DM	9V
OMIH-SS-106LM	7-1440000-9	OMIH-SS-106LM	6V
OMIH-SS-105LM	2-1419153-1	OMIH-SS-105LM	5V
EC TYPE NAME	PART NO	PART A	PART B

RELAY TYPE

NOTES:  
① LOT NO. SYSTEM AS FOLLOWING:

0825  
 WEEK  
 YEAR

② GENERAL TOLERANCE AS FOLLOWING:

TOLERANCE	
0~0.99mm	±0.1
1mm~2.99mm	±0.2
3mm~MIN.	±0.3

③ ④ TERMINAL DIMENSION IS NOT INCLUDING SOLDER TIP.  
 FOR THE TIN-PLATING OF THE PINS:  
 +0.1mm FOR WIDTH, THICKNESS AND DIAMETER.  
 +0.5mm FOR LENGTH.

		UV RESIN	UV SEAL	16
		EPOXY RESIN	SEAL	15
UL94 V-0		PBT	CASE	14
CLASS E		UEW	MAGNETIC WIRE	13
UL94 V-0		PET	BASE	12
UL94 V-0		PBT	BOBBIN	11
	SOLDER DIP	CP WIRE	COIL TERMINAL	10
UL94 V-0		PPS	CARD	9
		Ag ALLOY	MOVABLE CONTACT	8
		Ag ALLOY	STATIONARY CONTACT	7
		Cu ALLOY	HINGE SPRING	6
	SOLDER DIP	Cu ALLOY	STATIONARY TERMINAL	5
	SOLDER DIP	Cu ALLOY	MOVABLE SPRING	4
		STEEL	CORE	3
		STEEL	ARMATURE	2
		STEEL	YOKE	1
INCOMBUSTIBILITY	TREATMENT	MATERIAL	DESCRIPTION	ITEM

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN Y.Xiao	TE Connectivity	
DIMENSIONS: mm		CHK N.Funayama	NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD CH.HSU	OMIH(1M) SPEC300 CUSTOMER DRAWING	
0 PLC ± -		PRODUCT SPEC	SIZE CAGE CODE DRAWING NO RESTRICTED TO	
1 PLC ± -		APPLICATION SPEC	A3 00779 C=2-1419153-1	
2 PLC ± -		WEIGHT	SCALE SHEET REV	
3 PLC ± -			4:1 2 of 2 D	
4 PLC ± -				
ANGLES ± -		CUSTOMER DRAWING		
MATERIAL	FINISH			