

1.5A Low-Dropout Linear Regulator

Features

- Adjustable or fixed output voltage 1.5V, 1.8V, 2.5V, 3.3V and 5.0V
- TO-252 and TO-263T package
- Internal short circuit current limiting
- Internal over temperature protection
- Output current 1.5A
- 1.5V max. dropout voltage at 1.5A load current

Applications

- PC Motherboard
- Post regulation for switching DC/DC converter
- High efficiency linear regulator
- Battery powered instrumentation


General Description

The G9086 is a low dropout linear regulator to provide well regulated supply for applications requiring lower voltage from such as, 3.3V PC ATX power supplies.

The G9086 provides over temperature and over current protection circuits to prevent it from being damaged by abnormal operating conditions.


A 100μF tantalum electrolytic capacitor is recommended at the output to improve the transient response and stability.

Package Type



Typical Application Circuit

[Note 4]: Type of C_{OUT}

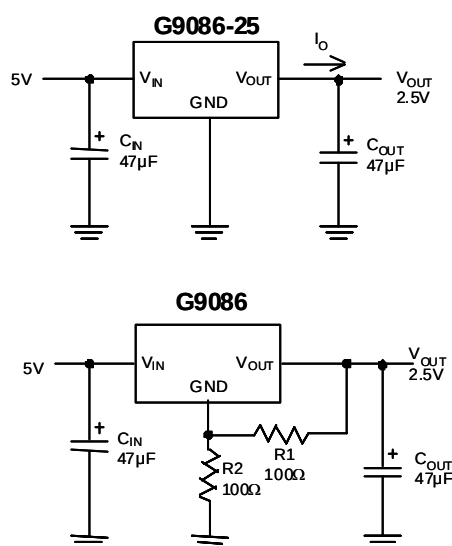

Note: $V_O = V_{REF} (1 + R2/R1) + I_{ADJ} \times R2$

Ordering Information

ORDER NUMBER	MARKING	VOLTAGE	TEMP. RANGE	PACKAGE (Pb free/Green)	REMARK
G9086T43U	G9086	Adjustable	-40°C to +85°C	TO-252	
G9086-15T43U	G9086-15	1.5V	-40°C to +85°C	TO-252	
G9086-18T43U	G9086-18	1.8V	-40°C to +85°C	TO-252	
G9086-25T43U	G9086-25	2.5V	-40°C to +85°C	TO-252	
G9086-33T43U	G9086-33	3.3V	-40°C to +85°C	TO-252	
G9086-50T43U	G9086-50	5.0V	-40°C to +85°C	TO-252	
G9086T43D	G9086	Adjustable	-40°C to +85°C	TO-252	
G9086-15T43D	G9086-15	1.5V	-40°C to +85°C	TO-252	
G9086-18T43D	G9086-18	1.8V	-40°C to +85°C	TO-252	
G9086-25T43D	G9086-25	2.5V	-40°C to +85°C	TO-252	
G9086-33T43D	G9086-33	3.3V	-40°C to +85°C	TO-252	
G9086-50T43D	G9086-50	5.0V	-40°C to +85°C	TO-252	
G9086TU3U	G9086	Adjustable	-40°C to +85°C	TO-263T	OBSOLETE
G9086-15TU3U	G9086-15	1.5V	-40°C to +85°C	TO-263T	OBSOLETE
G9086-18TU3U	G9086-18	1.8V	-40°C to +85°C	TO-263T	OBSOLETE
G9086-25TU3U	G9086-25	2.5V	-40°C to +85°C	TO-263T	OBSOLETE
G9086-33TU3U	G9086-33	3.3V	-40°C to +85°C	TO-263T	OBSOLETE
G9086-50TU3U	G9086-50	5.0V	-40°C to +85°C	TO-263T	OBSOLETE

* For other package types and pin options, please contact us at sales@gmt.com.tw

Note:T4 :TO-252 TU : TO-263T

3: Bonding Code

U & D: Tape & Reel