TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,
Taoyuan, 324, Taiwan, R.O.C.
TEL: 886-3-4690038 FAX: 886-3-4697532
E-mail: tstsales@mail.taisaw.com Web: www.taisaw.com

Approval Sheet For Product Specification

Issued Date:

Product Name: SAW Resonator 433.92 MHz SMD 3.8X3.8 mm

TST Parts No.: TC0318A

Customer Parts No.:_____

Company:_____

Division:_____

Approved by :_____

Date:_____

Checked by: Asin Lin

Approval by: Francis Chen

Date: 2006/3/8

TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,
Taoyuan, 324, Taiwan, R.O.C.
TEL: 886-3-4690038 FAX: 886-3-4697532
E-mail: tstsales@mail.taisaw.com Web: www.taisaw.com

SAW Resonator 433.92 MHz

MODEL NO.: TC0318A REV. NO.:1

RoHS Compliant
Lead free
Lead-free soldering

A. FEATURES:

1. 1-Port Resonator.

B. MAXIMUM RATING:

1.Input Power Level: 0 dBm

2.DC voltage: 12 V

3.Operating Temperature: -40°C to +85°C

4.Storage Temperature: -40°C to +85°C

C. ELECTRICAL CHARACTERISTICS:


Reference Temperature T_A=25℃

Characteristic	Units	Minimum	Typical	Maximum
Center frequency **Fc**	**MHz**	433.845	433.920	433.995
Insertion Loss **IL**	**dB**	-	1.6	2.5
Unload quality factor **Q_U**		6000	12000	-
Ageing of fc	**ppm/yr**	-	-	±10
Motional capacitance **C1**	**fF**	-	1.26	-
Motional inductance **L1**	**μH**	-	98.8	-
Motional resistance **R1**	**Ohm**	-	22.2	-
Parallel capacitance **Co**	**pF**	-	2.63	-
Frequency Temperature coefficient (TC_f)	**ppm/c*2**	-	0.032	-
Turnover To	**deg.C**	-2.5	12.5	27.5
Package size		SMD 3.8X3.8X1.2 mm		


Temperature dependence of fc: $fc(T_A)=fc(T_O)(1+TC_f(T_A-T_O)^2)$

D.EQUVIRENT CIRCUIT:

One-Port Resonator:

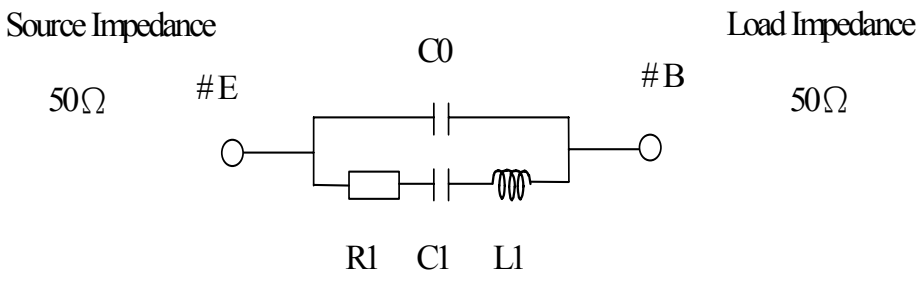

E.OUTLINE DRAWING:

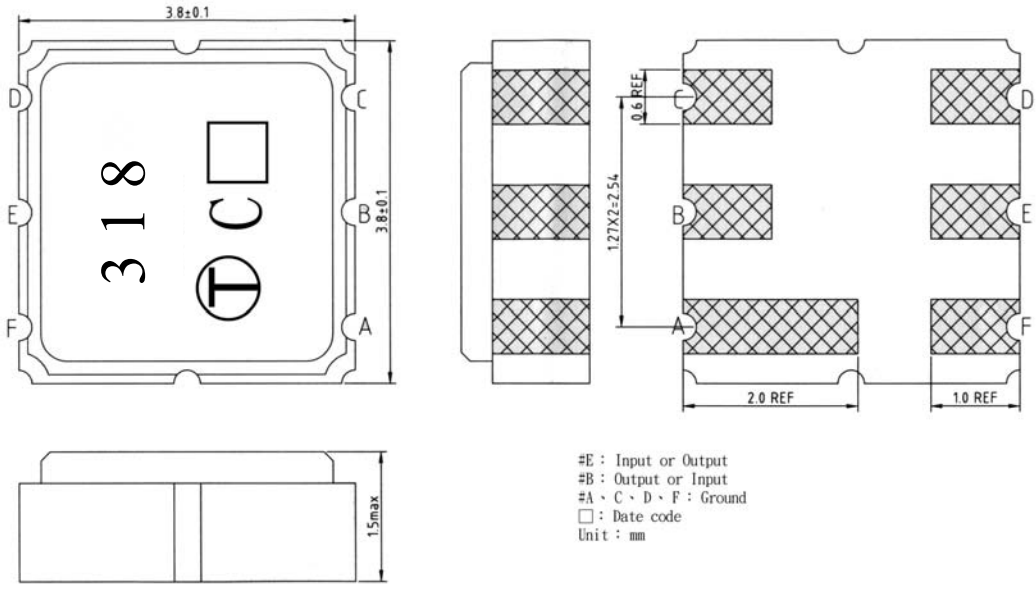

□ Date code: Provided by planer each year


Product Year Code

Year	**2001 2003 2005 .**	**2002 2004 2006 .**
Product Code	**C**	**c**


F.FREQUENCY CHARACTERISTICS:



G. TEST CIRCUIT:

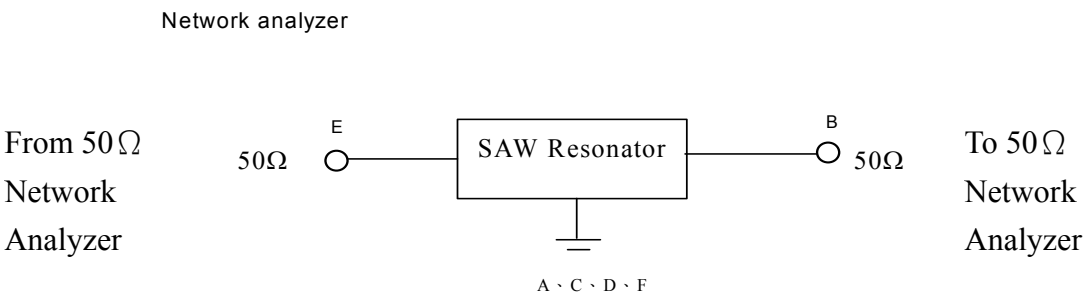


H. PCB Foot Print:

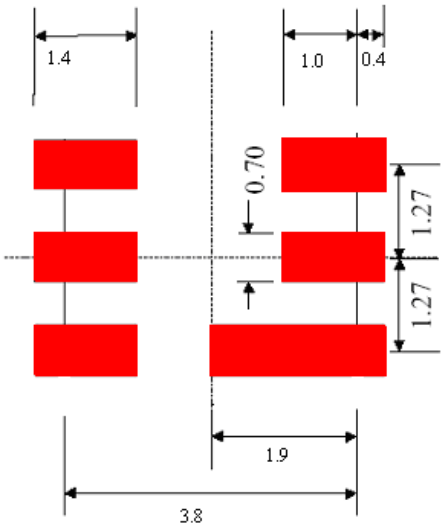


I. PACKING:

1.REEL DIMENSION

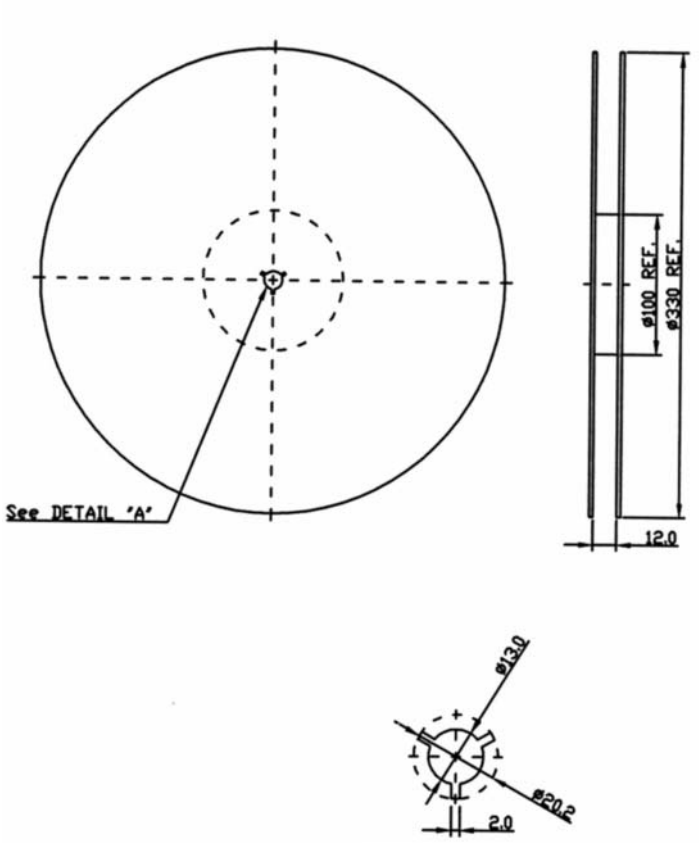

2.TAPE DIMENSION

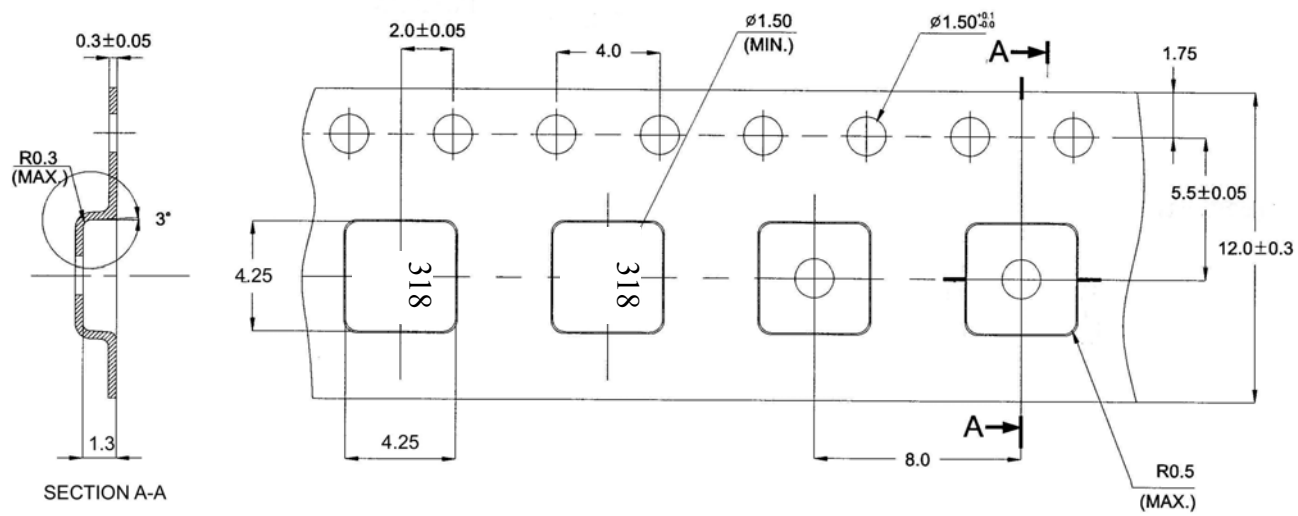

J. REFLOW PROFILE

