To our customers,

Old Company Name in Catalogs and Other Documents

On April 1st, 2010, NEC Electronics Corporation merged with Renesas Technology Corporation, and Renesas Electronics Corporation took over all the business of both companies. Therefore, although the old company name remains in this document, it is a valid Renesas Electronics document. We appreciate your understanding.

Renesas Electronics website: http://www.renesas.com

April 1st, 2010
Renesas Electronics Corporation

Issued by: Renesas Electronics Corporation (http://www.renesas.com)

Send any inquiries to http://www.renesas.com/inquiry.

Notice

1. All information included in this document is current as of the date this document is issued. Such information, however, is subject to change without any prior notice. Before purchasing or using any Renesas Electronics products listed herein, please confirm the latest product information with a Renesas Electronics sales office. Also, please pay regular and careful attention to additional and different information to be disclosed by Renesas Electronics such as that disclosed through our website.
2. Renesas Electronics does not assume any liability for infringement of patents, copyrights, or other intellectual property rights of third parties by or arising from the use of Renesas Electronics products or technical information described in this document. No license, express, implied or otherwise, is granted hereby under any patents, copyrights or other intellectual property rights of Renesas Electronics or others.
3. You should not alter, modify, copy, or otherwise misappropriate any Renesas Electronics product, whether in whole or in part.
4. Descriptions of circuits, software and other related information in this document are provided only to illustrate the operation of semiconductor products and application examples. You are fully responsible for the incorporation of these circuits, software, and information in the design of your equipment. Renesas Electronics assumes no responsibility for any losses incurred by you or third parties arising from the use of these circuits, software, or information.
5. When exporting the products or technology described in this document, you should comply with the applicable export control laws and regulations and follow the procedures required by such laws and regulations. You should not use Renesas Electronics products or the technology described in this document for any purpose relating to military applications or use by the military, including but not limited to the development of weapons of mass destruction. Renesas Electronics products and technology may not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable domestic or foreign laws or regulations.
6. Renesas Electronics has used reasonable care in preparing the information included in this document, but Renesas Electronics does not warrant that such information is error free. Renesas Electronics assumes no liability whatsoever for any damages incurred by you resulting from errors in or omissions from the information included herein.
7. Renesas Electronics products are classified according to the following three quality grades: “Standard”, “High Quality”, and “Specific”. The recommended applications for each Renesas Electronics product depends on the product’s quality grade, as indicated below. You must check the quality grade of each Renesas Electronics product before using it in a particular application. You may not use any Renesas Electronics product for any application categorized as “Specific” without the prior written consent of Renesas Electronics. Further, you may not use any Renesas Electronics product for any application for which it is not intended without the prior written consent of Renesas Electronics. Renesas Electronics shall not be in any way liable for any damages or losses incurred by you or third parties arising from the use of any Renesas Electronics product for an application categorized as “Specific” or for which the product is not intended where you have failed to obtain the prior written consent of Renesas Electronics. The quality grade of each Renesas Electronics product is “Standard” unless otherwise expressly specified in a Renesas Electronics data sheets or data books, etc.

   “Standard”: Computers; office equipment; communications equipment; test and measurement equipment; audio and visual equipment; home electronic appliances; machine tools; personal electronic equipment; and industrial robots.

   “High Quality”: Transportation equipment (automobiles, trains, ships, etc.); traffic control systems; anti-disaster systems; anti-crime systems; safety equipment; and medical equipment not specifically designed for life support.

   “Specific”: Aircraft; aerospace equipment; submersible repeaters; nuclear reactor control systems; medical equipment or systems for life support (e.g. artificial life support devices or systems), surgical implantations, or healthcare intervention (e.g. excision, etc.), and any other applications or purposes that pose a direct threat to human life.
8. You should use the Renesas Electronics products described in this document within the range specified by Renesas Electronics, especially with respect to the maximum rating, operating supply voltage range, movement power voltage range, heat radiation characteristics, installation and other product characteristics. Renesas Electronics shall have no liability for malfunctions or damages arising out of the use of Renesas Electronics products beyond such specified ranges.
9. Although Renesas Electronics endeavors to improve the quality and reliability of its products, semiconductor products have specific characteristics such as the occurrence of failure at a certain rate and malfunctions under certain use conditions. Further, Renesas Electronics products are not subject to radiation resistance design. Please be sure to implement safety measures to guard them against the possibility of physical injury, and injury or damage caused by fire in the event of the failure of a Renesas Electronics product, such as safety design for hardware and software including but not limited to redundancy, fire control and malfunction prevention, appropriate treatment for aging degradation or any other appropriate measures. Because the evaluation of microcomputer software alone is very difficult, please evaluate the safety of the final products or system manufactured by you.
10. Please contact a Renesas Electronics sales office for details as to environmental matters such as the environmental compatibility of each Renesas Electronics product. Please use Renesas Electronics products in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive. Renesas Electronics assumes no liability for damages or losses occurring as a result of your noncompliance with applicable laws and regulations.
11. This document may not be reproduced or duplicated, in any form, in whole or in part, without prior written consent of Renesas Electronics.
12. Please contact a Renesas Electronics sales office if you have any questions regarding the information contained in this document or Renesas Electronics products, or if you have any other inquiries.

(Note 1) “Renesas Electronics” as used in this document means Renesas Electronics Corporation and also includes its majority-owned subsidiaries.

(Note 2) “Renesas Electronics product(s)” means any product developed or manufactured by or for Renesas Electronics.

RENESAS

SILICON TRANSISTOR
μPA811T

HIGH-FREQUENCY LOW NOISE AMPLIFIER
NPN SILICON EPITAXIAL TRANSISTOR
(WITH BUILT-IN 2 × 2SC4228) SMALL MINI MOLD

The μPA811T has built-in 2 low-voltage transistors which are designed to amplify low noise in the VHF band to the UHF band.

FEATURES

- Low Noise
  NF = 1.9 dB TYP. @ f = 2 GHz, V_{CE} = 1 V, I_C = 3 mA
- High Gain
  $|S_{21e}|^2$ = 6.5 dB TYP. @ f = 2 GHz, V_{CE} = 1 V, I_C = 3 mA
- A Small Mini Mold Package Adopted
- Built-in 2 Transistors (2 × 2SC4228)

ORDERING INFORMATION

PART NUMBER	QUANTITY	PACKING STYLE
μPA811T	Loose products (50 PCS)	Embossed tape 8 mm wide. Pin 6 (Q1 Base), Pin 5 (Q1 Emitter), Pin 4 (Q2 Emitter) face to perforation side of the tape.
μPA811T-T1	Taping products (3 KPCS/Reel)	


Remark If you require an evaluation sample, please contact an NEC Sales Representative. (Unit sample quantity is 50 pcs.)

ABSOLUTE MAXIMUM RATINGS (T_A = 25 °C)


PARAMETER	SYMBOL	RATING	UNIT
Collector to Base Voltage	V_{CBO}	20	V
Collector to Emitter Voltage	V_{CEO}	10	V
Emitter to Base Voltage	V_{EBO}	1.5	V
Collector Current	I_C	35	mA
Total Power Dissipation	P_T	150 in 1 element 200 in 2 elements[Note]	mW
Junction Temperature	T_j	150	°C
Storage Temperature	T_{stg}	–65 to +150	°C

Note 110 mW must not be exceeded in 1 element.

PACKAGE DRAWINGS
(Unit: mm)

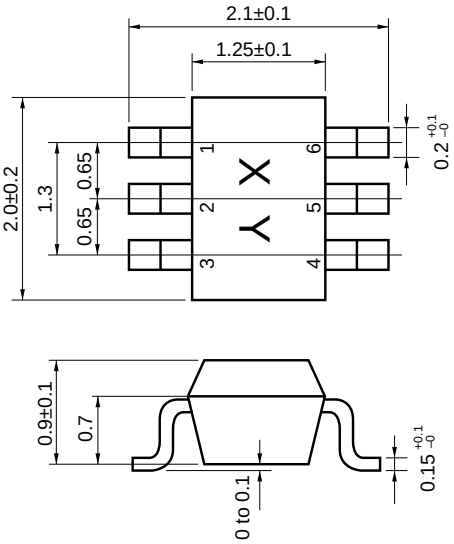

PIN CONFIGURATION (Top View)



PIN CONNECTIONS

1. Collector (Q1)
2. Base (Q2)
3. Collector (Q2)
4. Emitter (Q2)
5. Emitter (Q1)
6. Base (Q1)

The information in this document is subject to change without notice.

Document No. P11464EJ1V0DS00 (1st edition)
Date Published June 1996 P
Printed in Japan

© NEC Corporation 1996

ELECTRICAL CHARACTERISTICS (T_A = 25 °C)

PARAMETER	SYMBOL	CONDITION	MIN.	TYP.	MAX.	UNIT
Collector Cutoff Current	I_{CBO}	V_{CB} = 10 V, I_E = 0			1.0	μA
Emitter Cutoff Current	I_{EBO}	V_{EB} = 1 V, I_C = 0			1.0	μA
DC Current Gain	h_{FE}	V_{CE} = 3 V, I_C = 5 mA[Note 1]	80		200	
Gain Bandwidth Product	f_T	V_{CE} = 3 V, I_C = 5 mA	5.5	8.0		GHz
Feed-back Capacitance	C_{re}	V_{CB} = 3 V, I_E = 0, f = 1 MHz[Note 2]			0.7	pF
Insertion Power Gain	$\|S_{21e}\|^2$	V_{CE} = 3 V, I_C = 5 mA, f = 2 GHz	5.5	7.5		dB
Noise Figure	NF	V_{CE} = 3 V, I_C = 5 mA, f = 2 GHz		1.9	3.2	dB
h_{FE} Ratio	h_{FE1}/h_{FE2}	V_{CE} = 3 V, I_C = 5 mA A smaller value among h_{FE} of h_{FE1} = Q1, Q2 A Larger value among h_{FE} of h_{FE2} = Q1, Q2	0.85			

Notes 1. Pulse Measurement: Pw ≤ 350 μs, Duty cycle ≤ 2 %


2. Measured with 3-pin bridge, emitter and case should be connected to guard pin of bridge.

h_{FE} CLASSIFICATION


Rank	FB	GB
Marking	44R	45R
h_{FE} Value	80 to 160	125 to 250

TYPICAL CHARACTERISTICS (T_A = 25 °C)


P_T - T_A Characteristics

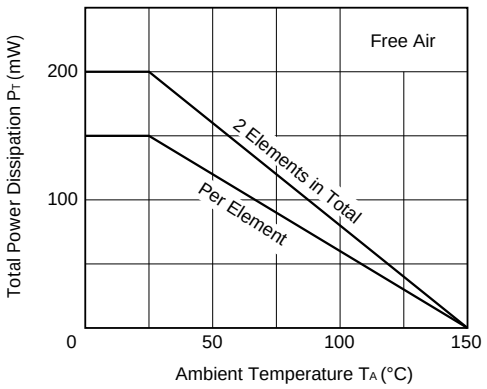


I_C - V_{CE} Characteristics

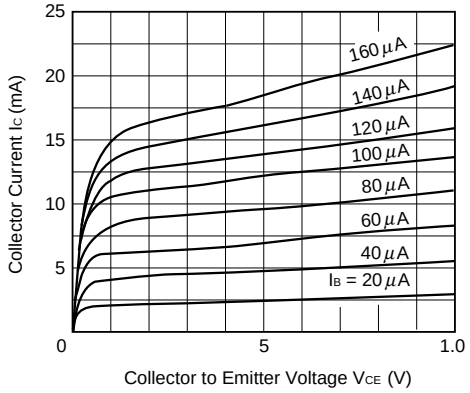


I_C - V_{BE} Characteristics

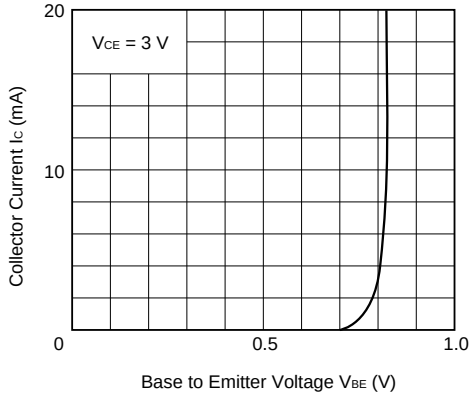


h_{FE} - I_C Characteristics

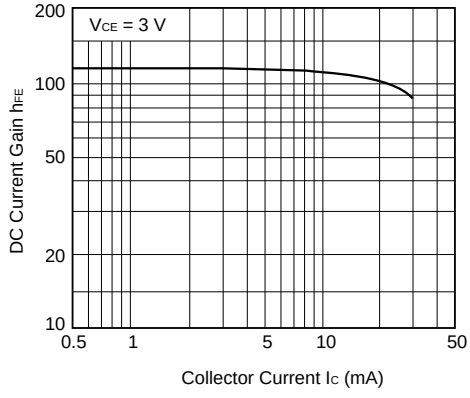


C_{re} - V_{CB} Characteristics

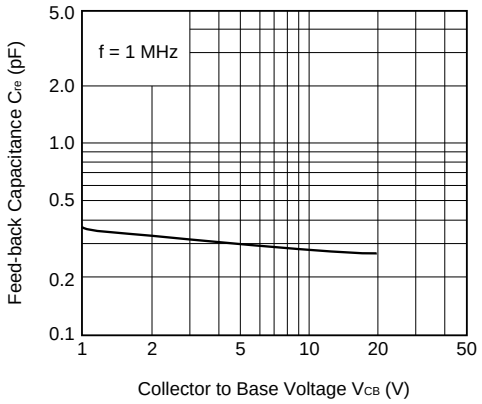


f_T - I_C Characteristics

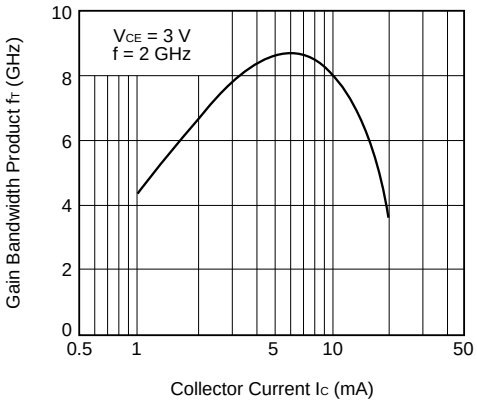


$|S_{21e}|^2$ - I_C Characteristics

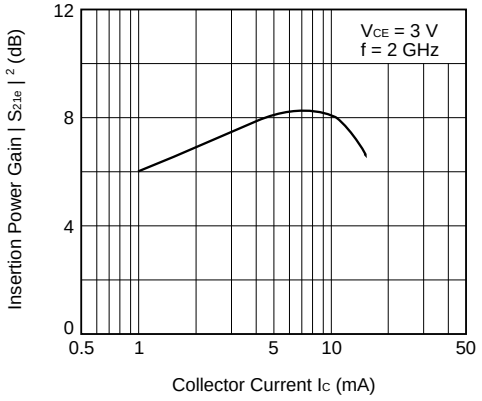

$|S_{21e}|^2$ - f Characteristics

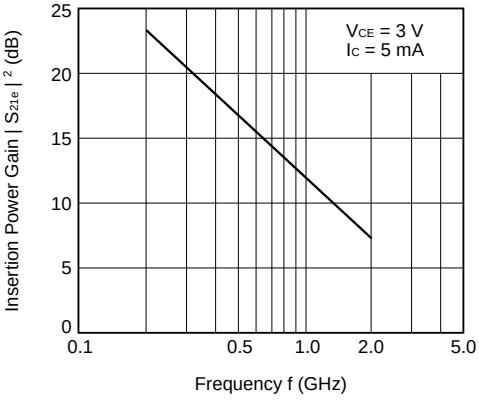

NF - I_C Characteristics

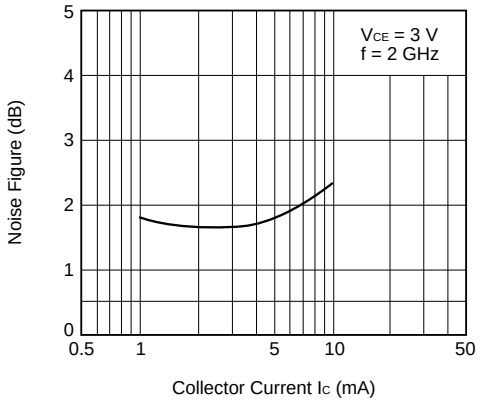

S-PARAMETERS

V_{CE} = 3 V, I_C = 1 mA

FREQUENCY	S_{11}		S_{21}		S_{12}		S_{22}	
MHz	MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG
100.00	0.969	–7.9	3.625	172.0	0.016	85.0	0.999	–3.6
200.00	0.957	–14.7	3.405	165.9	0.031	80.7	0.989	–6.4
300.00	0.909	–21.2	3.366	156.4	0.046	73.3	0.961	–10.4
400.00	0.909	–27.4	3.218	153.3	0.059	70.9	0.955	–12.4
500.00	0.895	–33.5	3.147	144.8	0.071	66.4	0.913	–14.2
600.00	0.876	–42.4	3.150	141.2	0.083	65.6	0.913	–16.7
700.00	0.821	–49.4	3.040	132.0	0.092	60.7	0.896	–18.0
800.00	0.750	–56.0	2.966	126.2	0.105	58.0	0.888	–21.1
900.00	0.710	–60.5	2.779	119.6	0.110	55.8	0.869	–23.3
1000.00	0.673	–65.3	2.640	114.1	0.119	51.5	0.840	–27.3
1100.00	0.658	–72.2	2.532	110.6	0.124	51.0	0.805	–28.9
1200.00	0.625	–78.4	2.504	105.6	0.129	48.2	0.758	–30.8
1300.00	0.573	–85.4	2.427	102.7	0.138	46.2	0.738	–31.1
1400.00	0.537	–91.2	2.350	96.2	0.137	44.5	0.706	–31.5
1500.00	0.505	–97.1	2.305	92.3	0.143	42.0	0.709	–32.1
1600.00	0.479	–103.2	2.210	88.3	0.142	43.8	0.693	–32.6
1700.00	0.448	–110.2	2.152	83.6	0.148	41.9	0.689	–35.3
1800.00	0.424	–115.4	2.101	81.0	0.155	42.9	0.678	–36.5
1900.00	0.399	–120.9	2.034	75.9	0.157	40.4	0.650	–39.1
2000.00	0.389	–127.2	1.987	71.7	0.165	38.1	0.631	–40.5

V_{CE} = 3 V, I_C = 3 mA

FREQUENCY	S_{11}		S_{21}		S_{12}		S_{22}	
MHz	MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG
100.00	0.903	–14.0	8.928	165.7	0.016	89.5	0.985	–6.5
200.00	0.856	–25.6	8.248	154.2	0.028	74.6	0.951	–11.2
300.00	0.763	–36.2	7.535	141.5	0.042	68.0	0.889	–16.4
400.00	0.713	–44.7	6.882	135.1	0.051	65.0	0.851	–18.6
500.00	0.656	–52.3	6.233	125.9	0.058	61.2	0.785	–20.1
600.00	0.602	–62.4	5.854	121.4	0.067	61.4	0.764	–21.7
700.00	0.536	–70.5	5.342	112.1	0.072	58.8	0.733	–21.9
800.00	0.466	–77.7	4.989	106.9	0.080	57.9	0.717	–23.8
900.00	0.412	–82.8	4.471	100.4	0.084	58.0	0.696	–25.0
1000.00	0.374	–87.8	4.123	95.3	0.091	55.7	0.669	–27.6
1100.00	0.346	–93.4	3.871	92.3	0.095	56.9	0.639	–28.3
1200.00	0.315	–100.2	3.667	88.1	0.100	55.9	0.603	–29.2
1300.00	0.285	–106.7	3.575	86.0	0.108	55.8	0.587	–28.7
1400.00	0.263	–112.8	3.367	81.3	0.111	55.6	0.566	–28.3
1500.00	0.245	–119.7	3.214	78.3	0.118	54.5	0.570	–28.2
1600.00	0.230	–126.7	3.038	75.5	0.121	57.3	0.561	–28.3
1700.00	0.214	–135.0	2.918	72.3	0.129	55.9	0.559	–30.5
1800.00	0.202	–141.2	2.821	69.9	0.137	57.2	0.553	–31.5
1900.00	0.192	–147.9	2.696	65.8	0.143	54.8	0.532	–33.7
2000.00	0.193	–154.2	2.613	61.8	0.152	53.2	0.515	–34.7

S-PARAMETERS

V_{CE} = 3 V, I_C = 5 mA

FREQUENCY	S_{11}		S_{21}		S_{12}		S_{22}	
MHz	MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG
100.00	0.848	–18.5	12.800	161.3	0.015	78.5	0.974	–8.3
200.00	0.766	–33.1	11.314	146.2	0.026	71.6	0.913	–14.0
300.00	0.647	–45.5	9.862	132.5	0.038	66.4	0.829	–19.0
400.00	0.575	–54.3	8.611	125.0	0.044	64.0	0.778	–20.4
500.00	0.506	–62.0	7.527	116.3	0.052	62.0	0.712	–20.9
600.00	0.450	–71.5	6.847	112.2	0.058	63.0	0.691	–21.5
700.00	0.393	–79.6	6.116	103.6	0.064	61.6	0.666	–21.0
800.00	0.335	–86.5	5.624	99.2	0.072	61.8	0.652	–22.2
900.00	0.290	–91.7	4.970	93.3	0.076	62.4	0.637	–23.1
1000.00	0.260	–97.0	4.521	88.7	0.084	60.4	0.616	–25.3
1100.00	0.236	–102.5	4.202	86.2	0.088	62.0	0.592	–25.7
1200.00	0.213	–109.7	3.947	82.4	0.094	61.2	0.561	–26.4
1300.00	0.193	–116.7	3.792	80.3	0.102	61.3	0.550	–25.7
1400.00	0.178	–123.3	3.468	76.1	0.106	61.1	0.532	–25.1
1500.00	0.168	–131.8	3.408	73.8	0.115	60.2	0.538	–25.1
1600.00	0.161	–139.7	3.218	71.4	0.118	62.3	0.533	–25.2
1700.00	0.153	–149.2	3.085	68.7	0.128	60.8	0.532	–27.5
1800.00	0.148	–156.1	2.980	66.4	0.137	61.9	0.527	–28.5
1900.00	0.143	–163.5	2.840	62.7	0.143	59.4	0.507	–30.7
2000.00	0.149	–169.9	2.752	58.8	0.153	57.6	0.492	–31.8

No part of this document may be copied or reproduced in any form or by any means without the prior written consent of NEC Corporation. NEC Corporation assumes no responsibility for any errors which may appear in this document.

NEC Corporation does not assume any liability for infringement of patents, copyrights or other intellectual property rights of third parties by or arising from use of a device described herein or any other liability arising from use of such device. No license, either express, implied or otherwise, is granted under any patents, copyrights or other intellectual property rights of NEC Corporation or others.

While NEC Corporation has been making continuous effort to enhance the reliability of its semiconductor devices, the possibility of defects cannot be eliminated entirely. To minimize risks of damage or injury to persons or property arising from a defect in an NEC semiconductor device, customer must incorporate sufficient safety measures in its design, such as redundancy, fire-containment, and anti-failure features.

NEC devices are classified into the following three quality grades:

"Standard", "Special", and "Specific". The Specific quality grade applies only to devices developed based on a customer designated "quality assurance program" for a specific application. The recommended applications of a device depend on its quality grade, as indicated below. Customers must check the quality grade of each device before using it in a particular application.

- Standard: Computers, office equipment, communications equipment, test and measurement equipment, audio and visual equipment, home electronic appliances, machine tools, personal electronic equipment and industrial robots
- Special: Transportation equipment (automobiles, trains, ships, etc.), traffic control systems, anti-disaster systems, anti-crime systems, safety equipment and medical equipment (not specifically designed for life support)
- Specific: Aircrafts, aerospace equipment, submersible repeaters, nuclear reactor control systems, life support systems or medical equipment for life support, etc.

The quality grade of NEC devices in "Standard" unless otherwise specified in NEC's Data Sheets or Data Books. If customers intend to use NEC devices for applications other than those specified for Standard quality grade, they should contact NEC Sales Representative in advance.

Anti-radioactive design is not implemented in this product.

M4 94.11