
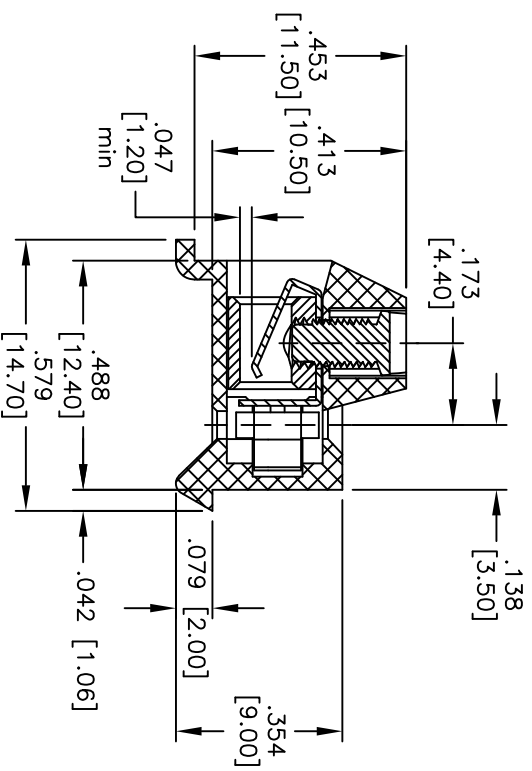
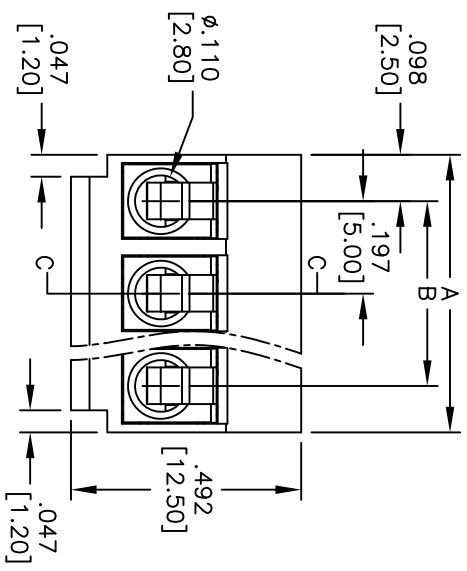


Rev	AWO #	Description	Date	Appr
-		RELEASED	1/18/11	

APPROVED: _____
 DATE: _____ TITLE: _____

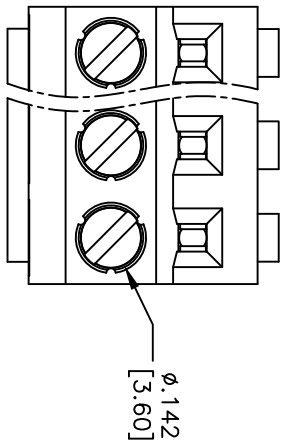

SECTION C-C

Poles: 2 thru 24
 A = .197 [5.00] X No. of Positions
 B = .197 [5.00] X No. of Spaces

SPECIFICATIONS:
 Material: Thermoplastic, rated UL 94V-0
 Insulator color: Black
 Wire Cage: Phosphor Bronze, Tin plated.
 Screw: Steel, M2.6/Zinc plated.
 Contact: Brass, Tin plated.
 Electrical:
 Operation voltage: 300 VAC max
 Current rating: 10 Amps max per Pole
 Dielectric withstanding voltage: 1600 VAC for 1 minute
 Mechanical:
 Torque(Lb-In): 3.5
 Wire Range: 14-26 Awg.
 Environmental:
 Operating temperature: -40°C to +115°C
 Lead free, RoHS compliant.
 Recommended soldering temp: 235°C for 5 sec.



ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710
TERMINAL BLOCK, .197" [5.00] PITCH

UNLESS OTHERWISE SPECIFIED	
ALL DIMENSIONS ARE MM [INCHES]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLES
.X ± .10	± .10
.XX ± .020	± .015
.XXX ± .015	± .010
APPROVALS	DATE
DRAWN	DY
CHECKED	1/18/11
APPROVED	

SIZE	PART NO.	REV.
X	EB114-XX-C-BK	
REF: S00007T	SCALE: NTS	SHEET 1 OF 1