



1 2 3 4 5 6 7

P1 **P2**

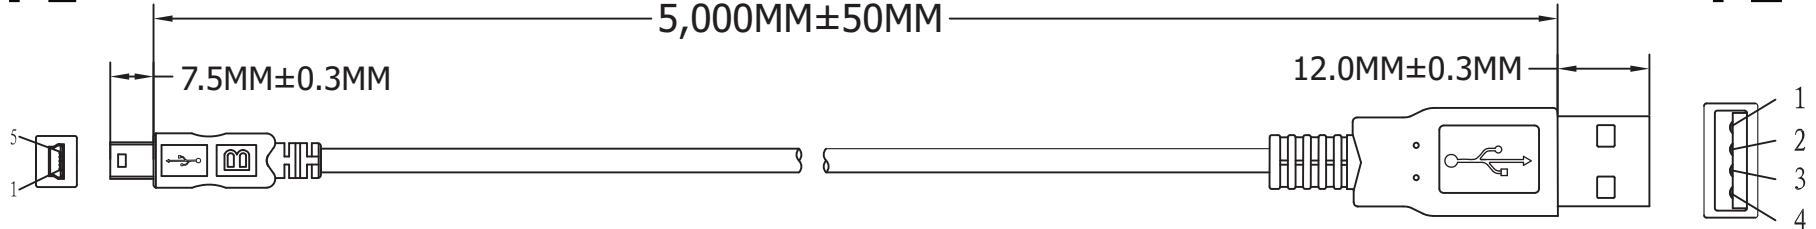

PIN ASSIGNMENT			
P1		P2	
1	RED	1	
2	WHITE	2	
3	GREEN	3	
5	BLACK	4	
SHELL		DRAIN + BRAID	

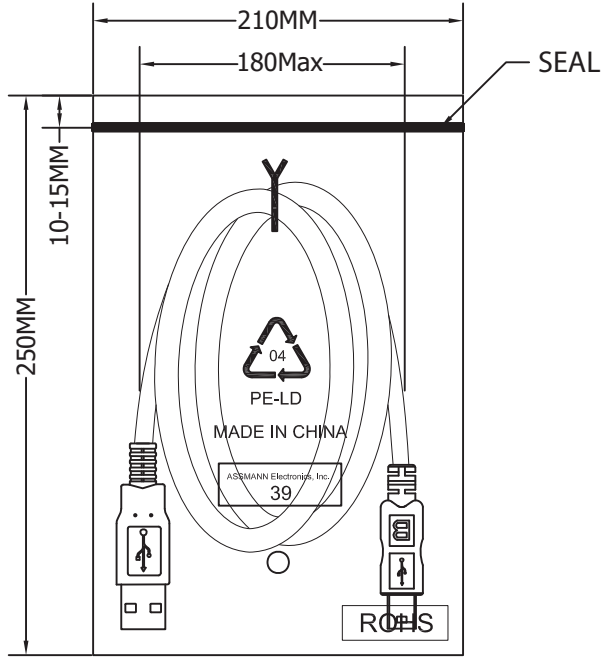

1PCS / PE BAG

Material:

- Cable: Black USB1.1 UL2725 28#/1P+28#/2C+AEB - OD: 3.8MM
- P1 Connector: USB Mini 5P Male
 - Pin: G/F
 - 3PCS Type
 - Insulator Color: Black
 - Shell: Nickel
 - Outer Jacket: Black PVC-40P
- P2 Connector: USB A Male
 - Pin: G/F
 - 4PCS Type
 - Insulator Color: White
 - Shell: Nickel
 - Outer Jacket: Grey

Electrical:

- 100% Open short & mis wire test
- Contact Resistance: 5Ω Max.
- Insulation Resistance: 10MΩ Min.
- Dielectric Test: 300V DC



Scale	1:1	Name		Item No.	AK672M-5-GR-R
TOLERANCE		Drawn	10.19.11	Title	
X.X	±0.40	Approved		USB 1.1 Mini Cable, Mini 5P Male <=> A Male, 5 Meters	
X.XX	±0.25			Drawing No.	
X.XXX	±0.15				
Angle	±3°			Replace	
				Sheet	
				rev00	
				ASSMANN components	
		Modification	Date	Name	

1 2 3 4 5 6 7