Model:LTC15



Characteristics:

Vacuum epoxy encapsulated, small dimension,light weight, high efficiency,low noise,wide application,lead type output.
Primary working voltage:110×2/115×2(Can be customized according to customer's requirements)

Technical index:


Installation method:Sub-plate mount
Flame resistance:UL94-V0
Insulation class:B grade
Work temperature:-30℃～+40℃
Frequency range:50Hz～60Hz
Dielectric strength:P/S：4.5KV AC

Electrical data:


Primary working voltage	110×2/115×2	V
Output power	15	VA
No-load loss	2.01	W
Weight		g

Secondary voltage	Secondary no load voltage	Secondary full load current
9V×2	10.5V×2	0.83A×2
12V×2	14.0V×2	0.63A×2
15V×2	17.4V×2	0.50A×2
18V×2	0.42V×2	0.42A×2
22V×2	26V×2	0.34A×2


Connection diagram:

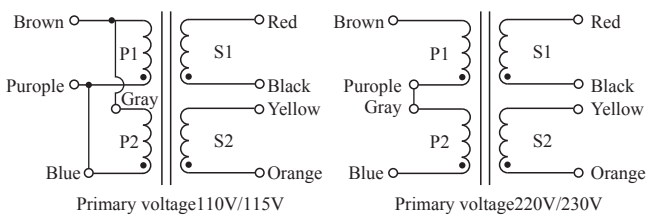

Dimension(mm):

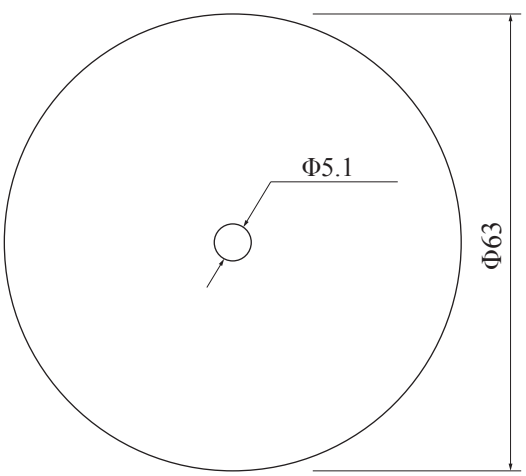

Front View

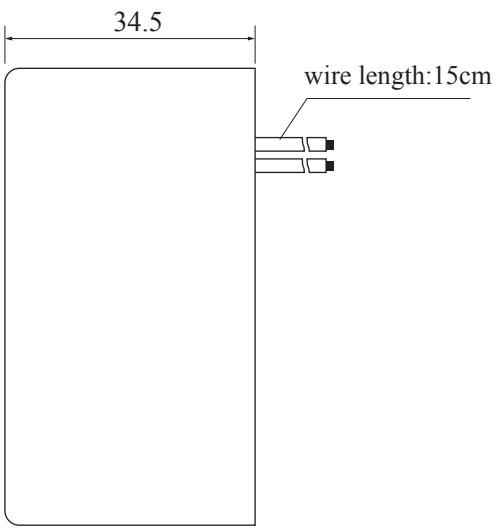

Side View